


Blake Series

24", 36", 48", 72" Indirect Outdoor Wall Sconce
5 CCT Selectable

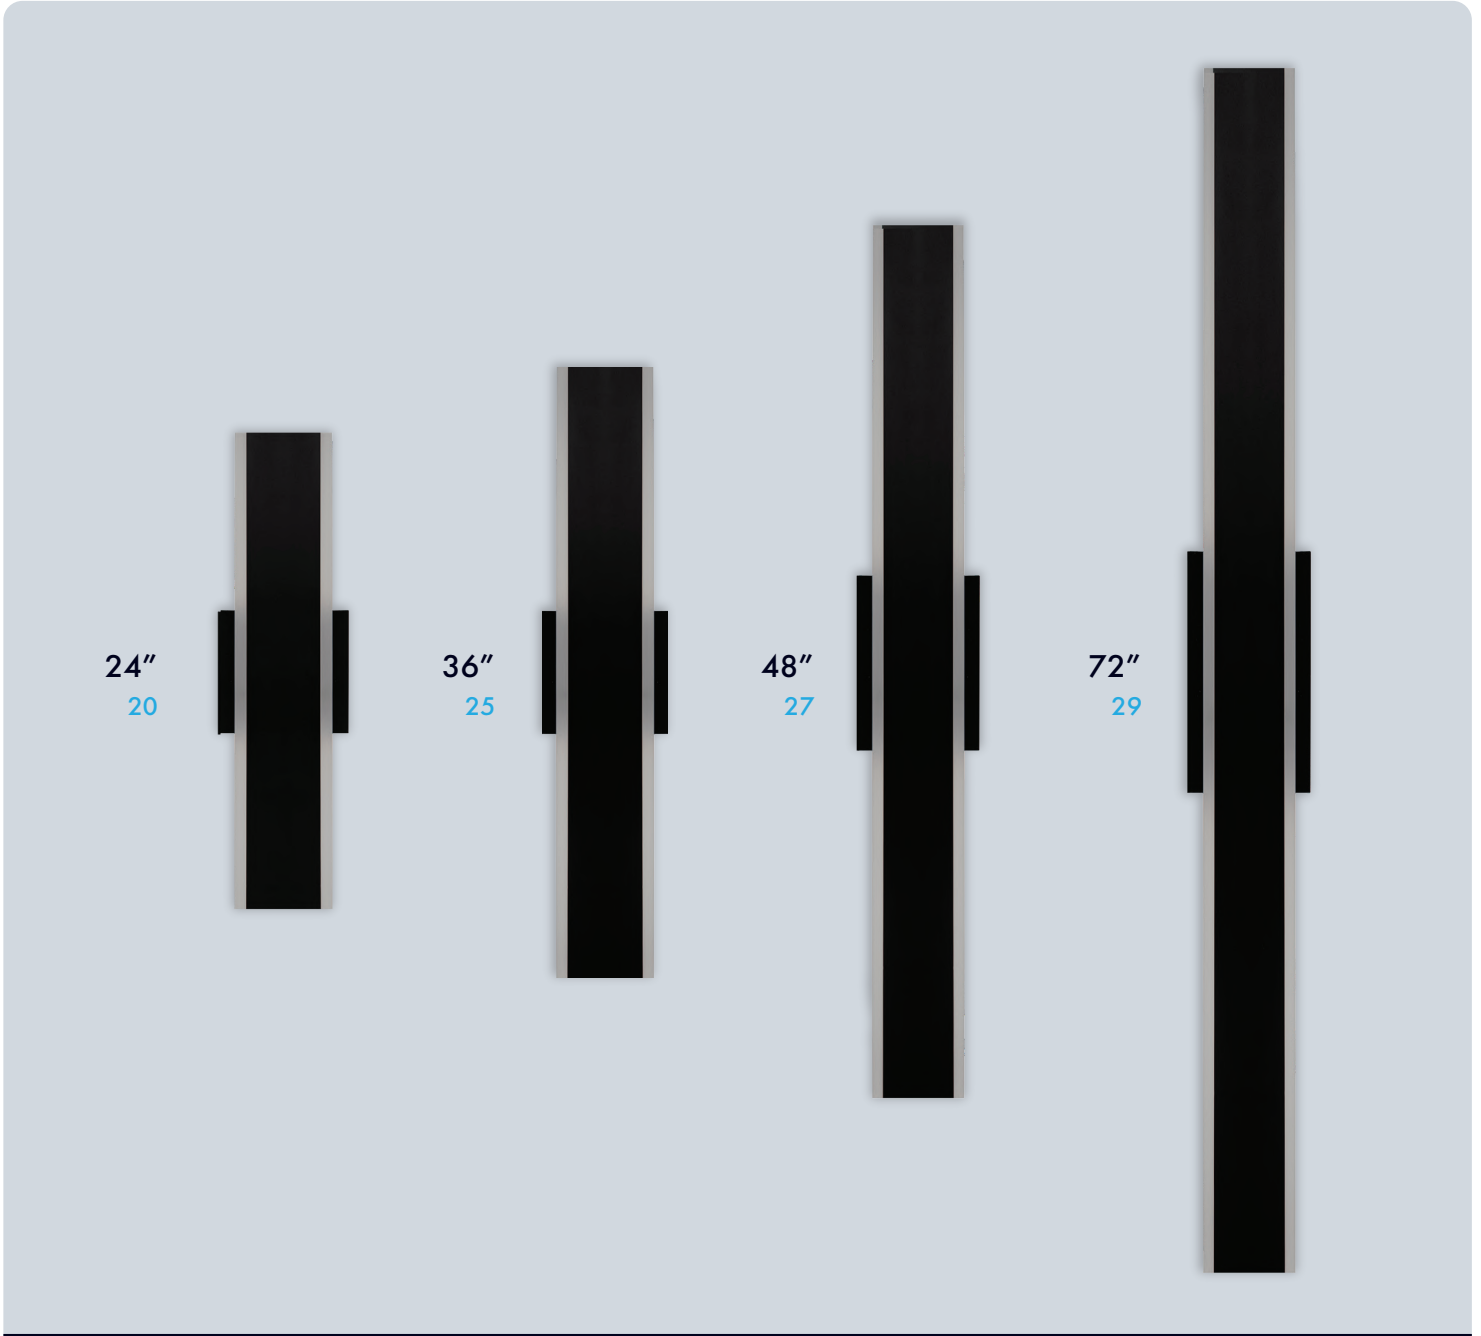

CRI
90

COLOR SELECTABLE
2700K 3000K 3500K 4000K 5000K

BEAM SPREAD
120°

INDIRECT

120-277V

WET LOCATION RATED
IP-65

5 YEAR WARRANTY


ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	DIMMABLE	LIFETIME	COST/YR
24"	BLAKE20	LEDIWS24/25W/5CCT/D/BK	25	120-277V	90	TRIAC	50,000	\$ 3.01
36"	BLAKE25	LEDIWS36/30W/5CCT/D/BK	30	120-277V	90	TRIAC	50,000	\$ 3.61
48"	BLAKE27	LEDIWS48/40W/5CCT/D/BK	40	120-277V	70	TRIAC	50,000	\$ 4.81
72"	BLAKE29	LEDIWS72/60W/5CCT/D/BK	60	120-277V	70	TRIAC	50,000	\$ 7.22

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	ETL
BLAKE20	LEDIWS24/25W/5CCT/D/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	120°	90	YES
BLAKE25	LEDIWS36/30W/5CCT/D/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2400	120°	90	YES
BLAKE27	LEDIWS48/40W/5CCT/D/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2800	120°	90	YES
BLAKE29	LEDIWS72/60W/5CCT/D/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	4200	120°	90	YES

DIMENSIONS

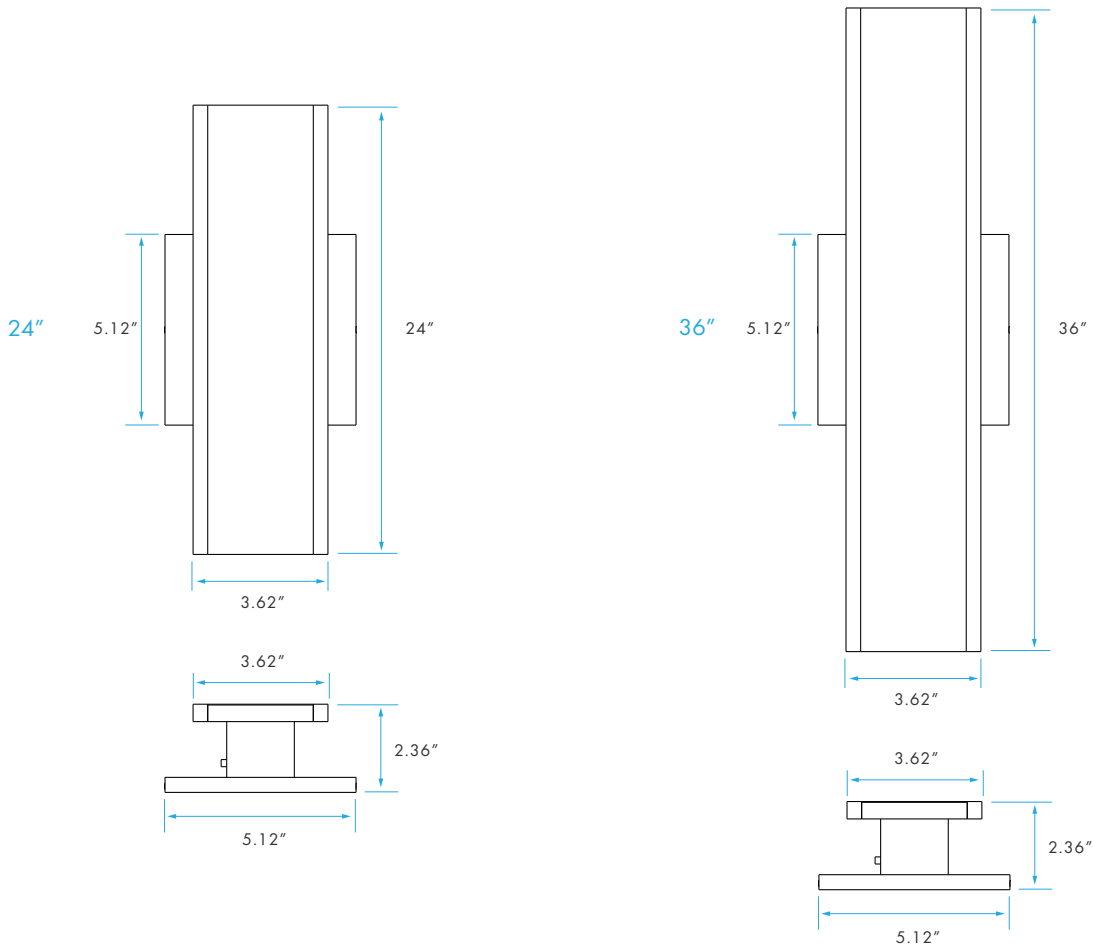

DIMENSIONS

