


TESSERA 787

Open-Centre Linear Light



Suspend Mount




Lit-up section



Linkable


- 1.65" (42.0 mm) height
- 7.87" (200 mm) width

FEATURES

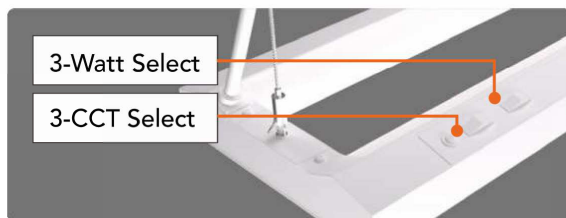

- 3-watt select
- 3-CCT select

CONTINUOUS-RUN PATTERNS

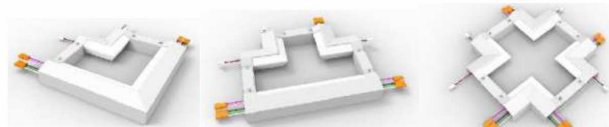

L-shape

T-shape

X-shape

ORDERING INFORMATION

SPECIFICATIONS



Switch Select

690 – 11,500 Lumens



CCT Select

3000K / 3500K / 4000K



Wattage Select

6 – 100 Watts



ETL Listed — Intertek
5 year warranty

FEATURE CUSTOMIZATION




indicate light & test switch



Bluetooth / PIR sensor

Optional side panel modules: Bluetooth / PIR sensor, or indicate light & test switch module.



Optional side panel colours:
custom colours available

MODEL	LENGTH	WATTAGE SELECT	OUTPUT LUMEN (UP 30% / DOWN 70%)	NOMINAL EFFICACY	CCT SELECT	INPUT VOLTAGE	DIMMABLE	CRI
TES-14LSUD2FT25WB2D1HV	2'	15W / 20W / 25W	1725 / 2300 / 2875 lm	115 lm/W	3000/3500/4000K	AC120-347V	0-10V 1-100%	Ra>90
TES-14LSUD4FT50WB2D1HV	4'	30W / 40W / 50W	3450 / 4600 / 5750 lm	115 lm/W	3000/3500/4000K	AC120-347V	0-10V 1-100%	Ra>90
TES-14LSUD8FT100WB2D1HV	8'	60W / 80W / 100W	6900 / 9200 / 11500 lm	115 lm/W	3000/3500/4000K	AC120-347V	0-10V 1-100%	Ra>90
TES-14LSUDL10WB2D1HV	L pattern	6W / 8W / 10W	690 / 920 / 1150 lm	115 lm/W	3000/3500/4000K	AC120-277V	0-10V 1-100%	Ra>90
TES-14LSUDT10WB2D1HV	T pattern	6W / 8W / 10W	690 / 920 / 1150 lm	115 lm/W	3000/3500/4000K	AC120-277V	0-10V 1-100%	Ra>90
TES-14LSUDC12WB2D1HV	X pattern	8W / 10W / 12W	920 / 1150 / 1380 lm	115 lm/W	3000/3500/4000K	AC120-277V	0-10V 1-100%	Ra>90