

HANS

LED Canopy Luminaire

A square LED canopy luminaire available in two die-cast housing sizes, motion-sensor ready, with a glass optical lens for soft, uniform illumination. Suitable for gas stations, parking garages, building canopies, museums, galleries, and shopping malls. Suitable for interior and exterior wet-location applications.

- Four wattages — 95 / 120W (16.53" body) and 150 / 200W (18" body)
- 12,721 – 28,390 lm · 130–140 lm/W
- Glass optical lens · die-cast aluminum, LED T_j < 85°C
- 1–10V dimming standard · motion-sensor ready
- Wet location · 5-year limited warranty



UL

FCC

RoHS

Wet Location

LUMEN OUTPUT	12,721 – 28,390 lm
--------------	--------------------

EFFICACY	130–140 lm/W
----------	--------------

COLOR TEMP / CCT	4000K / 5000K
------------------	---------------

CRI	70 (Ra)
-----	---------

DISTRIBUTION	105–111°
--------------	----------

WATTAGE	95 / 120 / 150 / 200W
---------	-----------------------

VOLTAGE	120–277V
---------	----------

POWER FACTOR	0.95–0.98
--------------	-----------

DIMMING	1–10V (standard)
---------	------------------

DRIVER	Electronic · PF 0.95–0.98 · driver efficacy 90–93%
--------	--

FINISH	Dark Bronze, White, Black, Silver
--------	-----------------------------------

OPERATING TEMP	–22°F to 113°F (storage –40°F to 176°F)
----------------	---

IP / IMPACT	Wet Location
-------------	--------------

MATERIAL	Die-cast aluminum · glass lens
----------	--------------------------------

DIMENSIONS	16.53" or 18" square
------------	----------------------

LIFETIME	Over 50,000 hrs
----------	-----------------

WARRANTY	5-Year Limited
----------	----------------

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


● **In stock** — all other configurations built to order.

MODEL	WATTAGE	VOLTAGE	CCT	DIMMING	CONTROLS	FINISH
HANS	● 95 95W ● 120 120W ● 150 150W ● 200 200W	● U 120-277V	40 4000K ● 50 5000K	● DV 1-10V (standard)	● N None M Motion sensor	DBZ Dark Bronze ● WH White BK Black SV Silver

Build Your Order Code — example values shown in grey


MODEL	WATTAGE	VOLTAGE	CCT	DIMMING	CONTROLS	FINISH
HANS	95	U	50	DV	N	WH

FINISHES

DBZ
Dark BronzeWH
WhiteBK
BlackSV
Silver

DIMENSIONS & WEIGHT

BODY	WIDTH	LENGTH	FIXTURE HEIGHT	OVERALL WITH STEM	GROSS WEIGHT
95 / 120W	16.53"	16.53"	1.66-1.9"	8.75"	9.87 lb
150 / 200W	18"	18"	4.33"	9"	13.45 lb

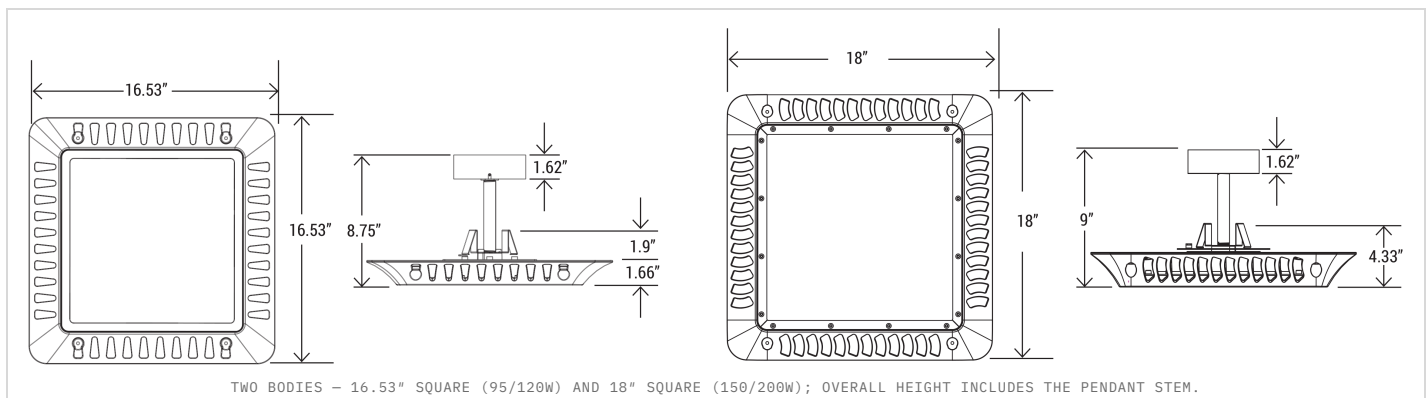

OPTIONS





CONTROLS

DV	1–10V dimming (standard on every model)
M	Motion sensor (factory-installed)

ORDERED SEPARATELY

MSD	Multi-level motion + daylight sensor
RC	Remote controller

PHOTOMETRY

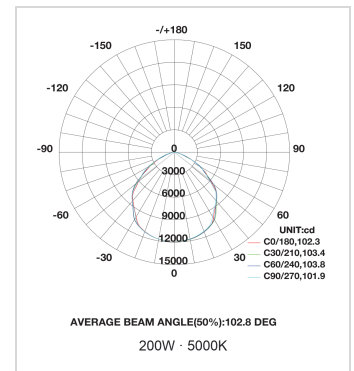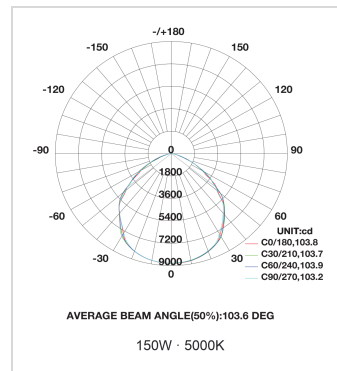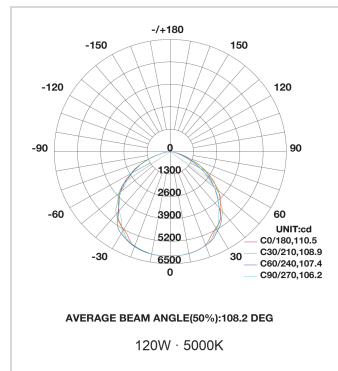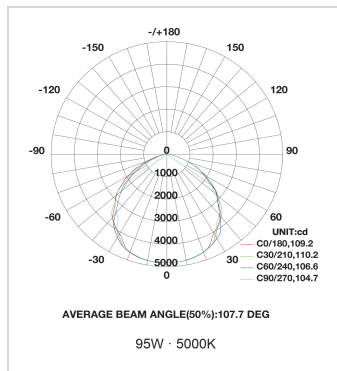

DELIVERED LUMENS

Optic	CCT	95W	120W	150W	200W
Canopy · 105–111°	Nominal	12,721 lm	16,086 lm	21,250 lm	28,390 lm

130 lm/W at 95/120W · 140 lm/W at 150/200W. Available in 4000K or 5000K.

DISTRIBUTION 105–111° **EFFICACY** 130–140 lm/W **IES FILE** Available on request