

# LED Flush Mount Panels

## SPECIFICATIONS:

Size	9 "	12 "	15 "
Power(Wattage)	18W	24W	30W
Lumen	2000LM	3000LM	4000LM
Input voltage	AC120V 50/60Hz		
Color Temperature	3CCT(30K-40K-50K)/Single Color		
Shape	Round		
Light Color	White		
IP Rate	IP44		

Input voltage	AC120V
Power Factor	0.95~0.98
Operating Temperature	-40°C - 40°C
CRI	>80
LED Type	SMD2835
Thickness	0.94inch
Installation of LED Driver	Internal
Type of LED Driver	Constant current output
Energy Level	A
Triac Dimmable	Yes
Testing	Dimming ,Aging Testing
Life Span Based on 3hrs/day	50000Hrs
Beam Angle	120D
Warranty	5 years
Certificates	ETL/ES/FCC
Brand of LED Chip	Epistar




No Flicker




DIMMABLE



50000 Hrs




# Products Dimensions

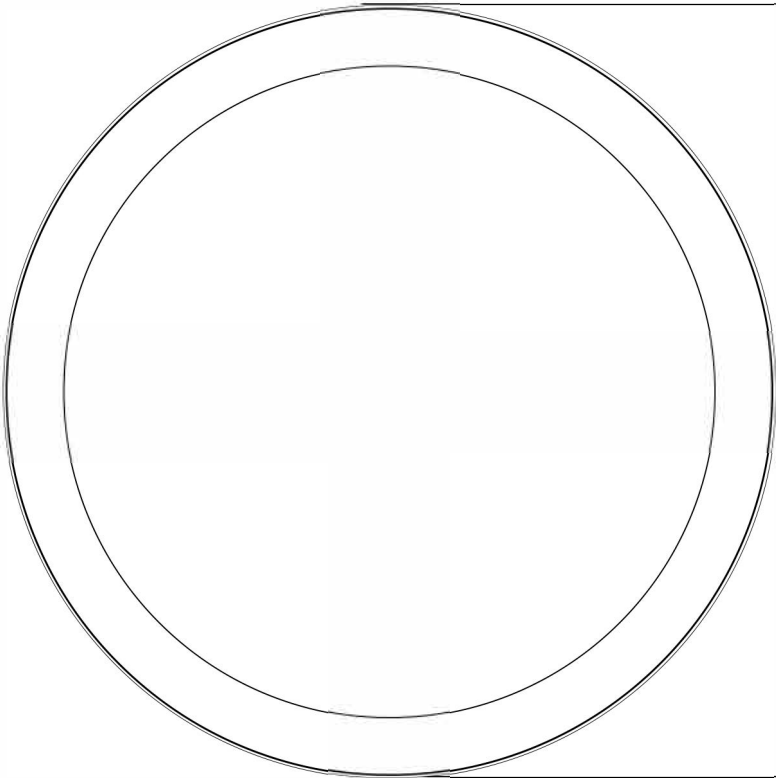

9in(230mm)  
12in(300mm)  
15in(380mm)

# Features

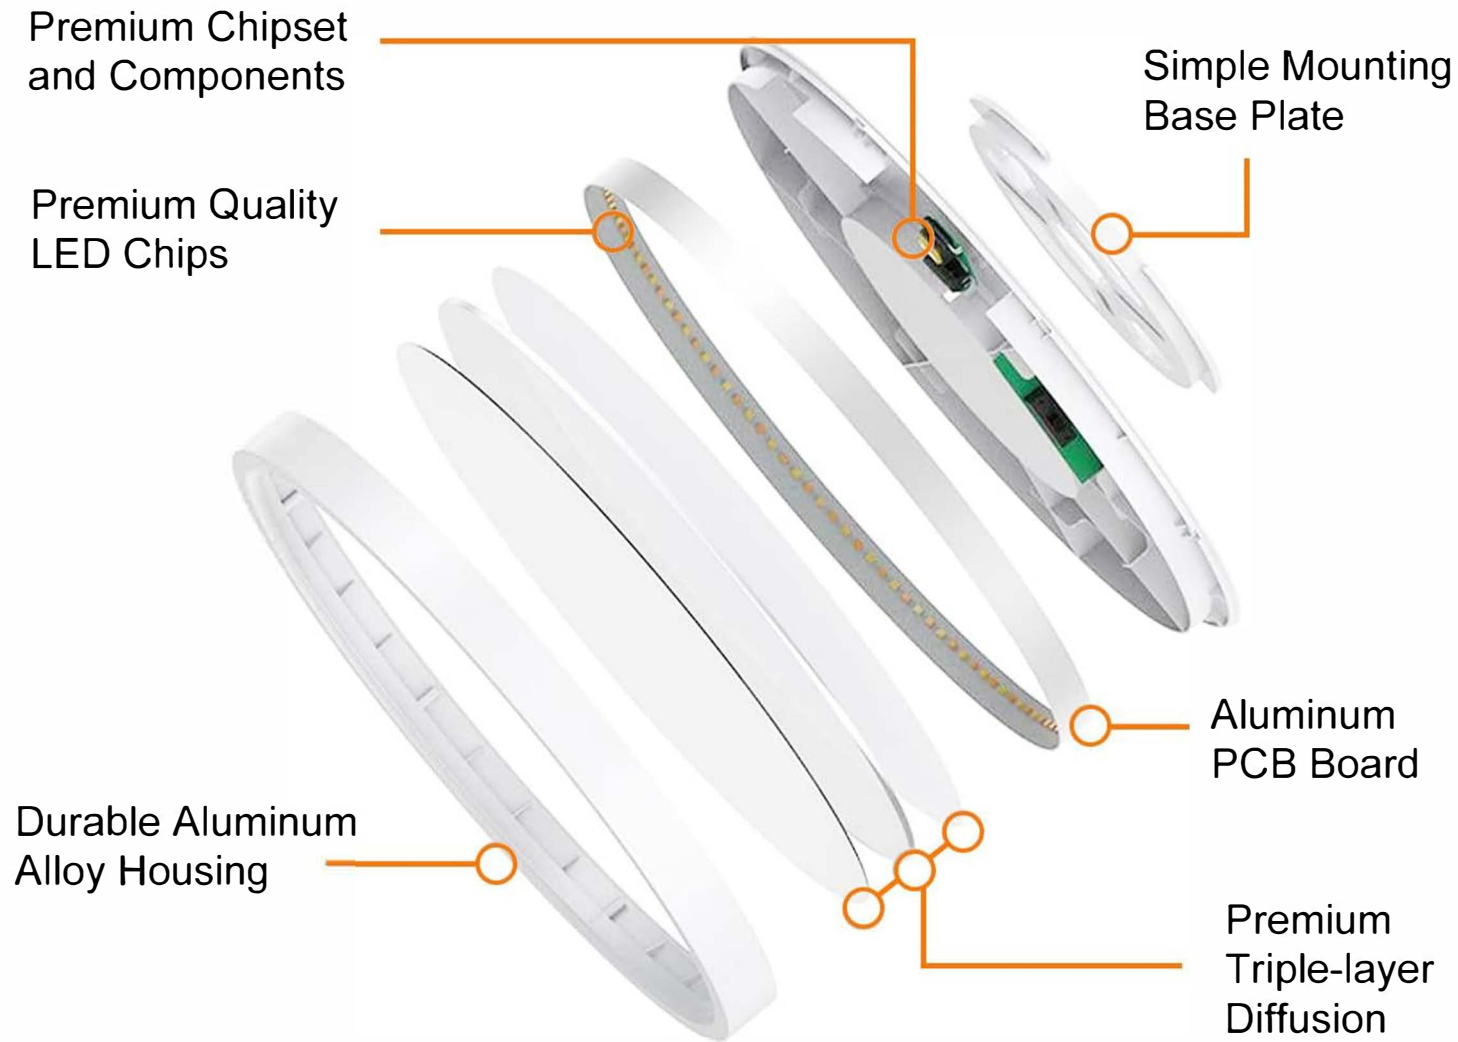

Premium Chipset and Components

Premium Quality LED Chips


Simple Mounting Base Plate

Durable Aluminum Alloy Housing

Aluminum PCB Board

Premium Triple-layer Diffusion

# 3CCT

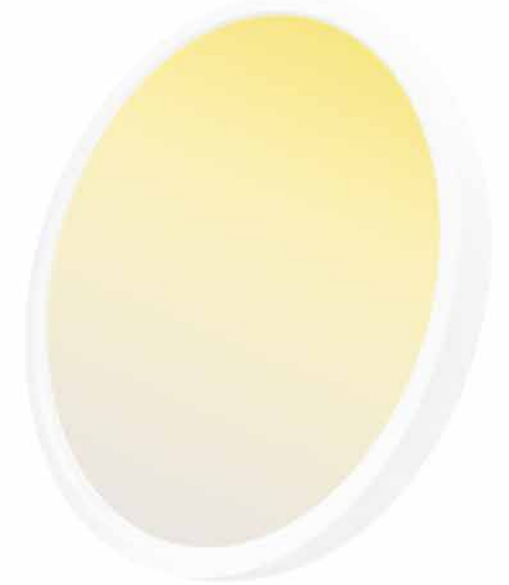

<i>Model No</i>	<i>Size</i>	<i>Voltage</i>	<i>Wattage</i>	<i>LUMEN</i>	<i>CCT(K)</i>
<b>YG010I18-R-3C</b>	<b>9IN</b>	<b>AC120V</b>	<b>18W</b>	<b>2000LM</b>	Single Color/3CCT(30K-40K-50K)
<b>YG010L24-R-3C</b>	<b>12IN</b>	<b>AC120V</b>	<b>24W</b>	<b>3000LM</b>	Single Color/3CCT(30K-40K-50K)
<b>YG010O30-R-3C</b>	<b>15IN</b>	<b>AC120V</b>	<b>30W</b>	<b>4000LM</b>	Single Color/3CCT(30K-40K-50K)

# INSTALLATION GUIDE



1: Fix the base plate onto the ceiling with 4 screws.



2: Connect L/N wires with quick connectors.



3: Push up the flush mount ceiling light.



4: Install the ceiling lamp on the base plate by rotating clockwise.