

CIP-4612-FR

4" Fire Rated Ultra Slim Panel with Baffle



5-level CCT switch

DESCRIPTION

APPLICATION

Residential, retail and commercial ambient lighting

OVERVIEW


Wattage 12W
Delivered Lumens Up to 800lm
CCT 5-level CCT selectable
2700K, 3000K, 3500K, 4000K, 5000K
CRI 90+
Beam Angle 120°
Dimming TRIAC (120VAC)
0-10V (120VAC-277VAC)
Cut Out Ø4-1/4"

CERTIFICATIONS

cETLus Listed
Fire Rated - ASTM E119, UL 263 and CAN ULC S101 tested and certified for 2 hours
Wet location
IC rated
Airtight

WARRANTY

5 Years

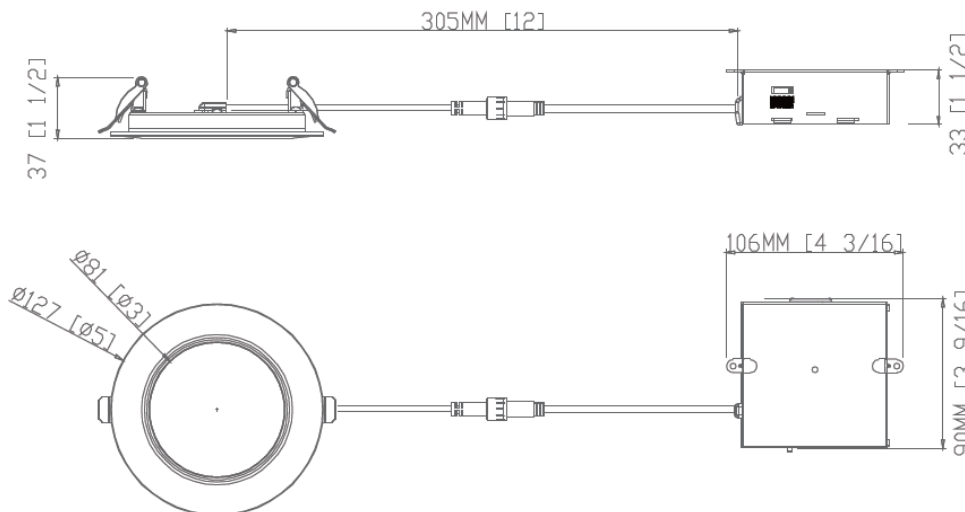

RLH346-NC-UNI

Universal mounting plate with hanger bars.
(Optional, order separately)

ORDERING INFORMATION

Model

CIP-4612-FR-SW5-WH – 120V input TRIAC dimming

CIP-4612-FR-UNI-SW5-WH – 120-277V input 0-10V dimming

CIP-4612-FR		-SW5-WH
-------------	--	---------

CIP-6615-FR

6" Fire Rated Ultra Slim Panel with Baffle

CIP
LIGHTING



5-level CCT switch

DESCRIPTION

APPLICATION

Residential, retail and commercial ambient lighting

OVERVIEW

Wattage 15W
Delivered Lumens Up to 1100lm
CCT 5-level CCT selectable
2700K, 3000K, 3500K, 4000K, 5000K
CRI 90+
Beam Angle 120°
Dimming TRIAC (120VAC)
0-10V (120VAC-277VAC)
Cut Out Ø6-1/4"


CERTIFICATIONS

cETLus Listed
Fire Rated - ASTM E119, UL 263 and CAN ULC S101 tested and certified for 2 hours
Wet location
IC rated
Airtight

WARRANTY

5 Years

DIMENSIONS

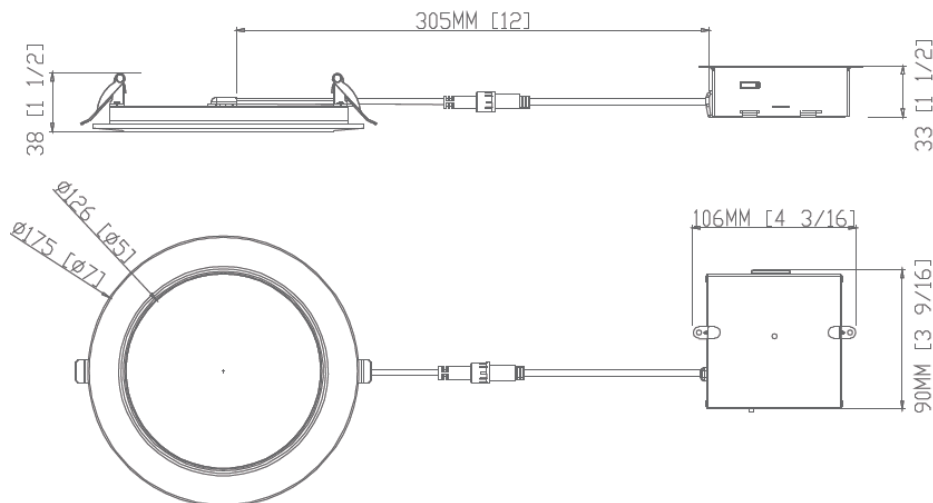

RLH346-NC-UNI

Universal mounting plate with hanger bars.
(Optional, order separately)

ORDERING INFORMATION

Model

CIP-6615-FR-SW5-WH- 120V input TRIAC dimming
CIP-6615-FR-UNI-SW5-WH- 120-277V input 0-10V dimming

CIP-6615-FR		-SW5-WH
-------------	--	---------