

CIP-WH-D01A



CIP-WH-D01B



CIP-WH-D01C



CIP-WH-D01D



CIP-WH-D01E



CIP-WH-D01F

## CIP-WH

### PRODUCT DESCRIPTION

Discover this Circular Pendant, customize up to 6 rings.

A fusion of sleek design and practicality. Crafted from extruded aluminum with a glare-free acrylic ring, these pendants offer sizes from 15.75" to 70.87", allowing for versatile configurations.

With tunable white and RGBW options, choose from over 6500 powder-coated colors to set the perfect ambiance.

Shipped assembled for convenience.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens.
- Fixture delivered lumens per watt ratio up to 80 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- **UL listed, suitable for dry location. (BAA) Buy American compliant.**
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch







**MODEL INFORMATION:**

**Example: CIP-WH-D01A-20W-S-B**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable	
*CIP-WH-D01A CIP-WH-D01B CIP-WH-D01C CIP-WH-D01E CIP-WH-D01F	*20W=15.75"	*S=3000K/3500K/4000K Color Select by internal CCT	*Blank= 1-10V dimming (default)	*B= Black	*Blank=10' foot 120" (default)	
	30W=23.62"	Color Selector, 4000K factory color default set, CRI 90	C= Dali	S= Platinum Silver	5'=5 foot 60"	
	40W=31.50"	A=2700K/3500K/4000K Color Select by internal CCT	D= DMX For RGBW and Tunable White, control by Wall Switch or DMX control system	W= Gloss White	15'=15 foot 180"	
	50W=39.37"	Color Selector, 4000K factory color default set. CRI 90	Z=ZigBee For RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O= Oil Rubbed Bronze	20'=20 foot 240"	
	60W=47.24"	T=3K-4K Tunable White control by remote/wall control	L=ELV / Triac dimming			25'=25 foot 300"
	70W=59.06"	R3= RGB+3000K				
	80W=70.87"	R4=RGB+4000K				30'=30 foot 360"
	<b>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</b>					


**STANDARD COLOR FINISHES**



## LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm$ 500K	Delivered Lumen $\pm$ 10%
CIP-WH-D01A/B/C/D/E/F	15.75"	20W	3000K/3500K/4000K or 2700K/3500K/4000K	1600 lm
	23.62"	30W	3000K/3500K/4000K or 2700K/3500K/4000K	2400 lm
	31.50"	40W	3000K/3500K/4000K or 2700K/3500K/4000K	3200 lm
	39.37"	50W	3000K/3500K/4000K or 2700K/3500K/4000K	4000 lm
	47.24"	60W	3000K/3500K/4000K or 2700K/3500K/4000K	4800 lm
	59.06"	70W	3000K/3500K/4000K or 2700K/3500K/4000K	5600 lm
	70.87"	80W	3000K/3500K/4000K or 2700K/3500K/4000K	6400 lm

## EMERGENCY BATTERY OPTIONS


PICTURE	MODEL NUMBER	DESCRIPTION
	-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL


### Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**CIP-WH-D01A Canopy mount with direct lighting.**

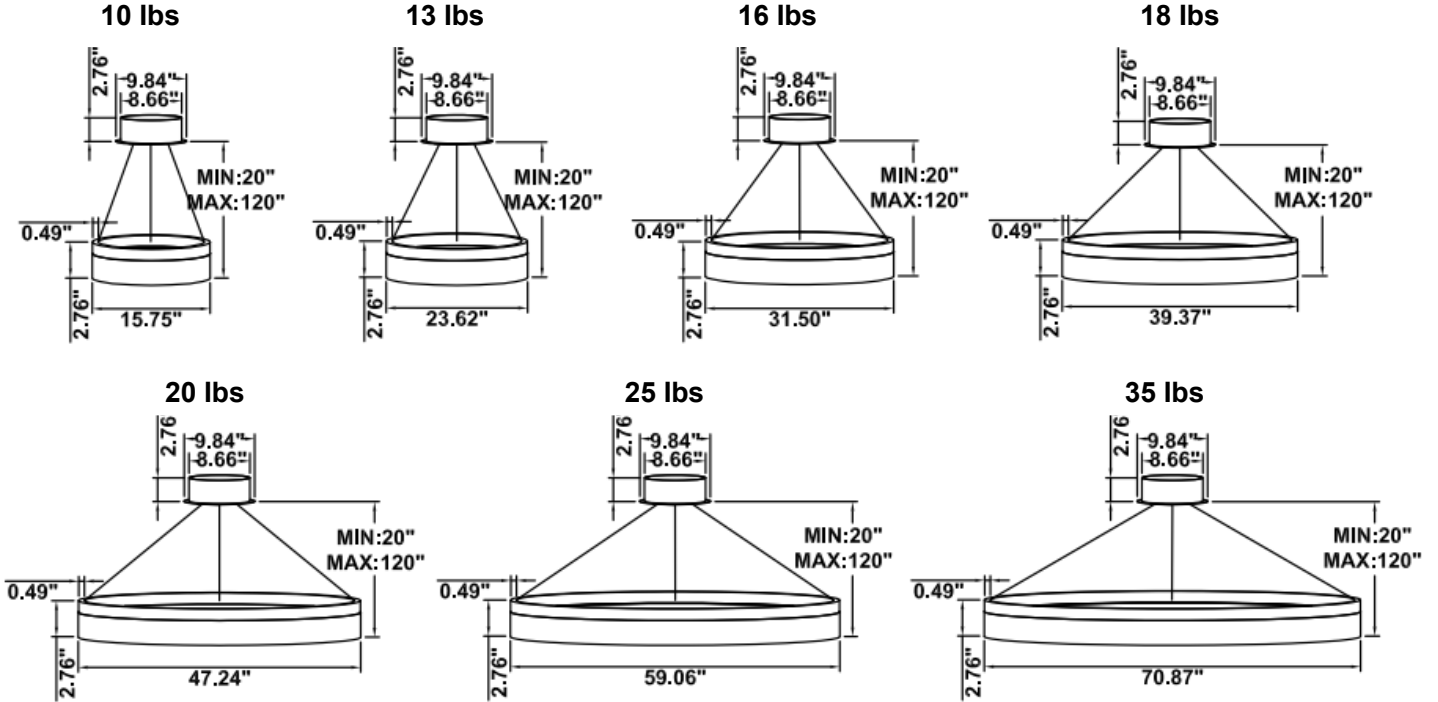


**CIP-WH-D01B Canopy mount with accent ring, direct lighting.**

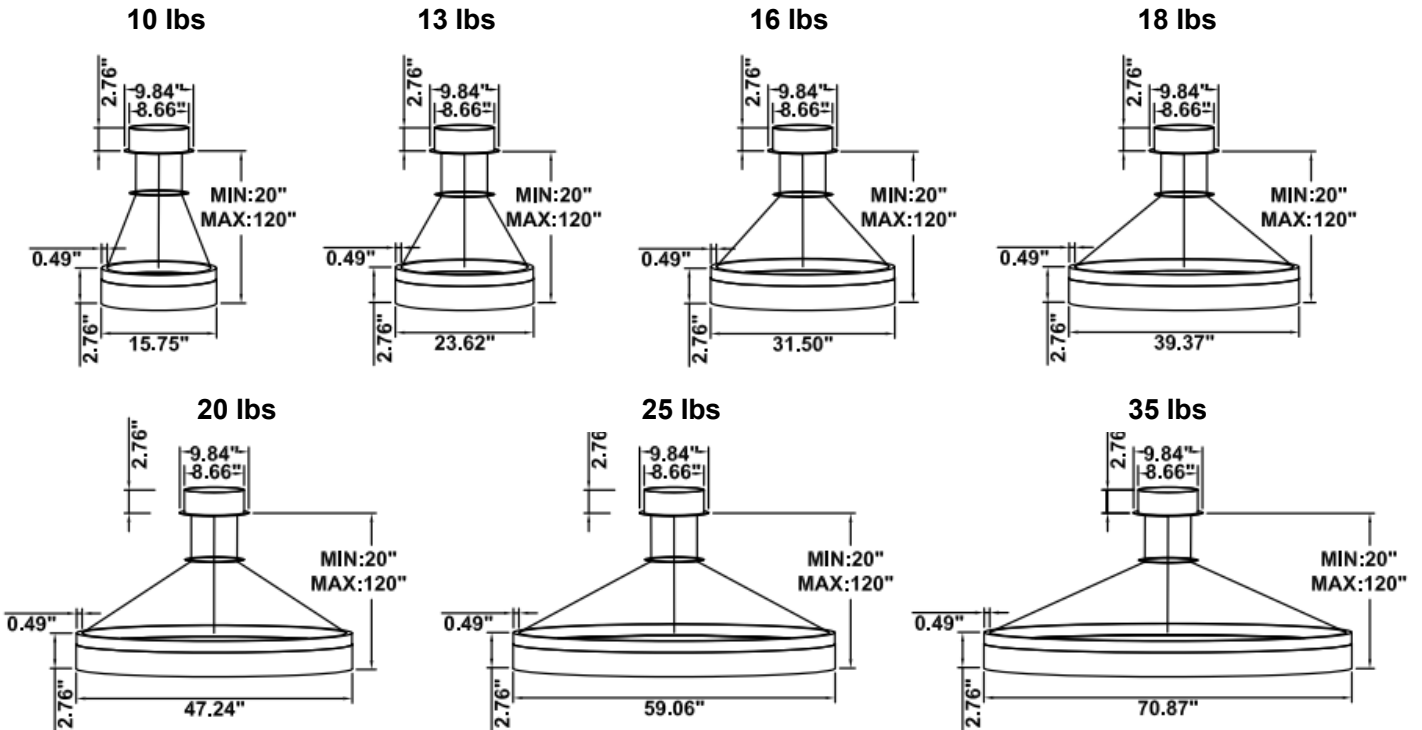


**CIP-WH-D01C**

Remote driver with direct lighting.


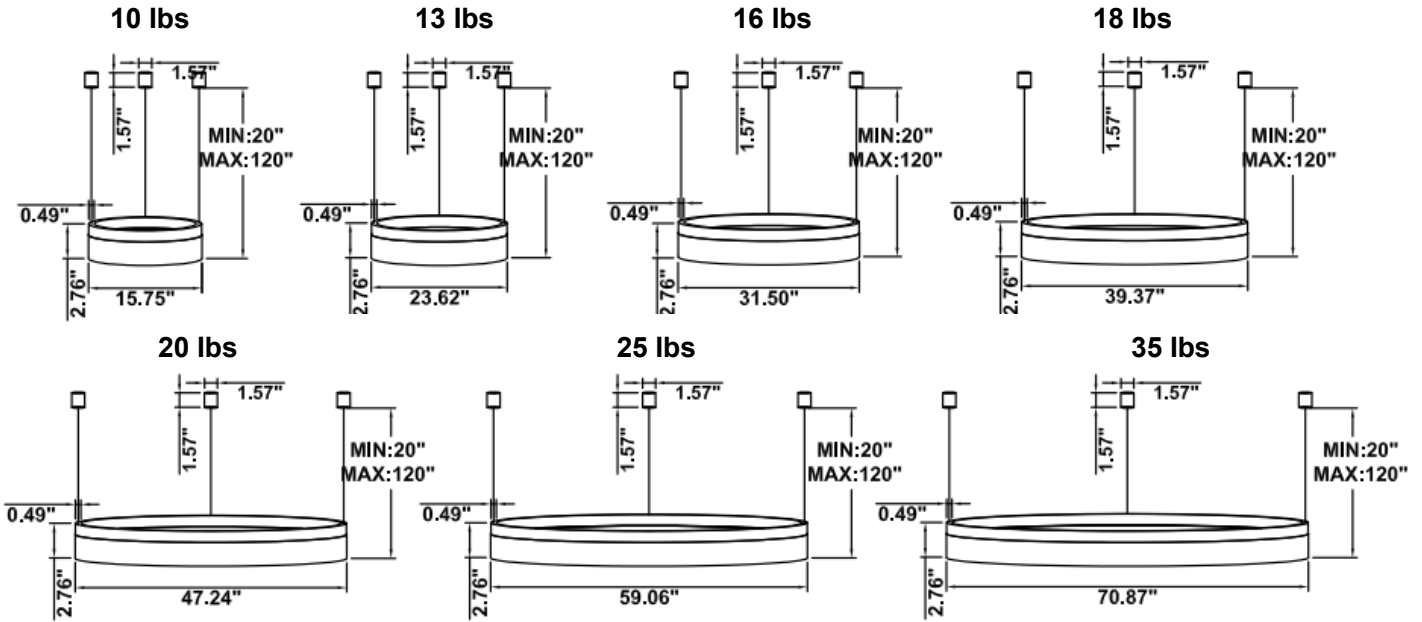


**CIP-WH-D01D**


Canopy mount with cable splitter, direct lighting.

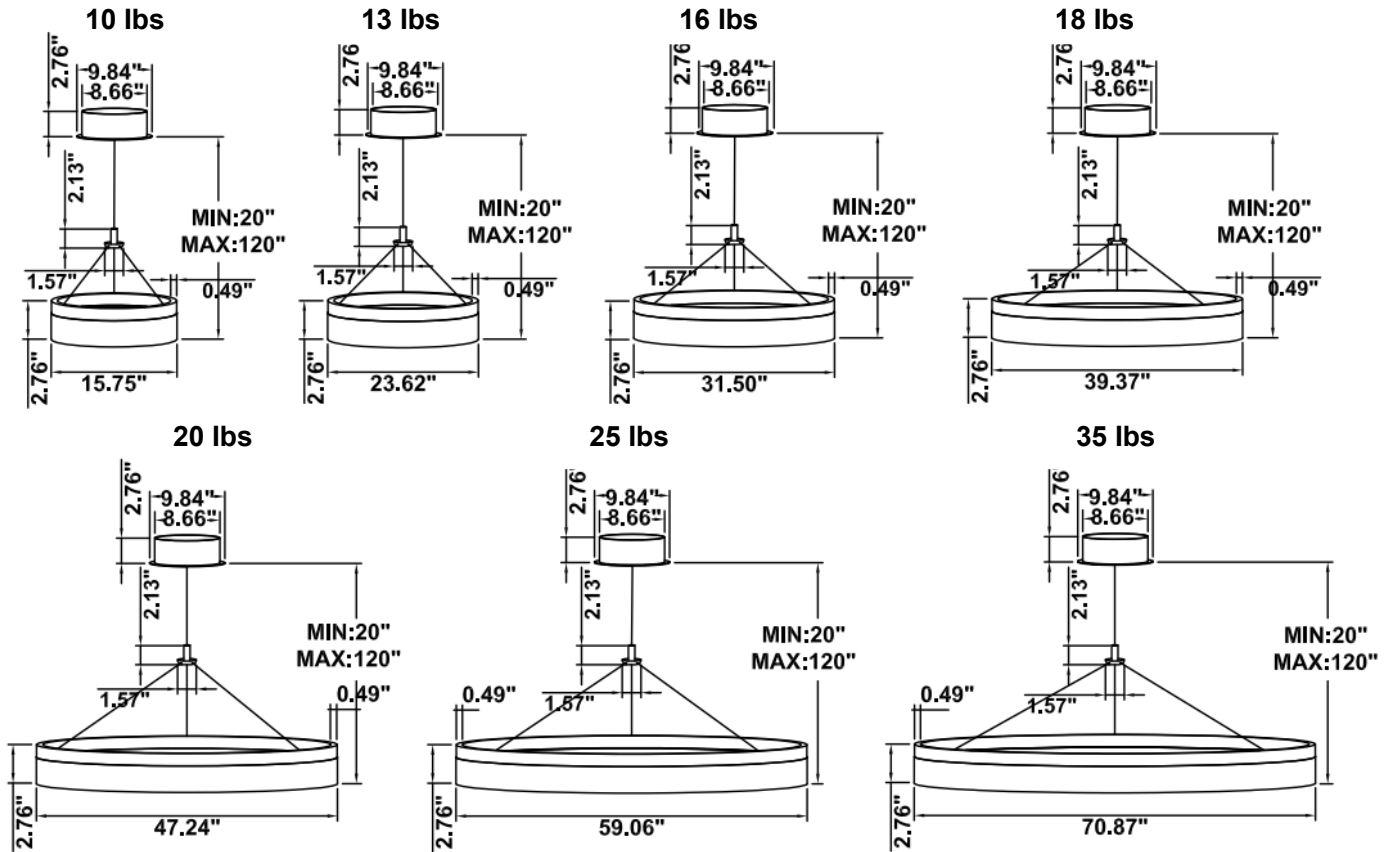




**CIP-WH-D01E Remote driver with cable splitter, direct lighting.**

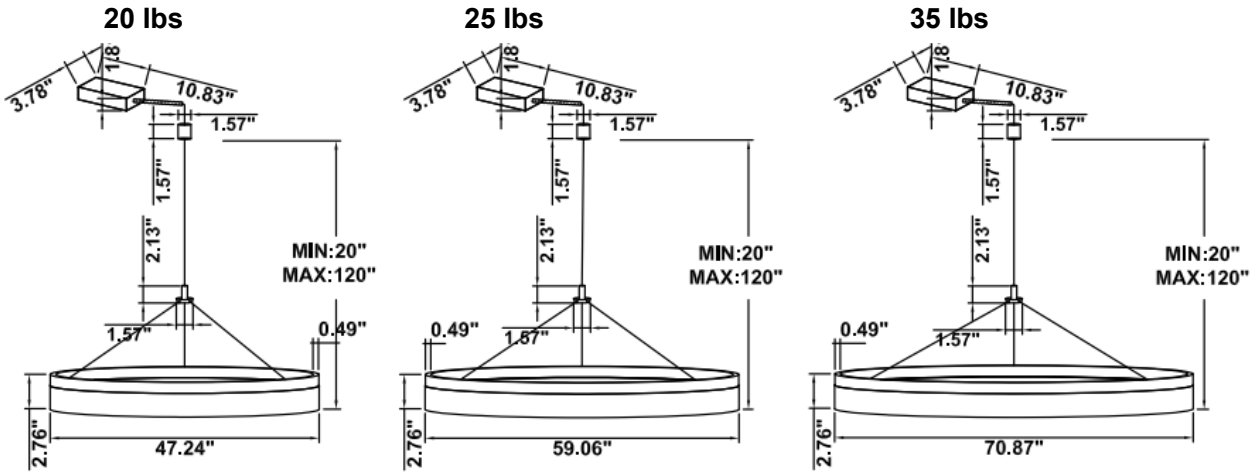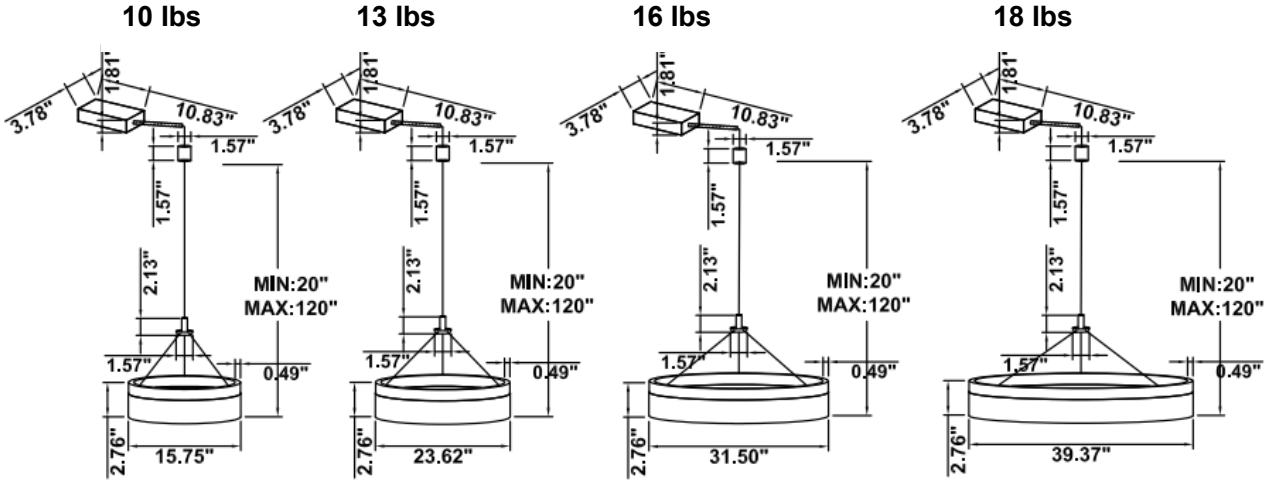

**CIP-WH-D01F Surface mount with direct lighting.**



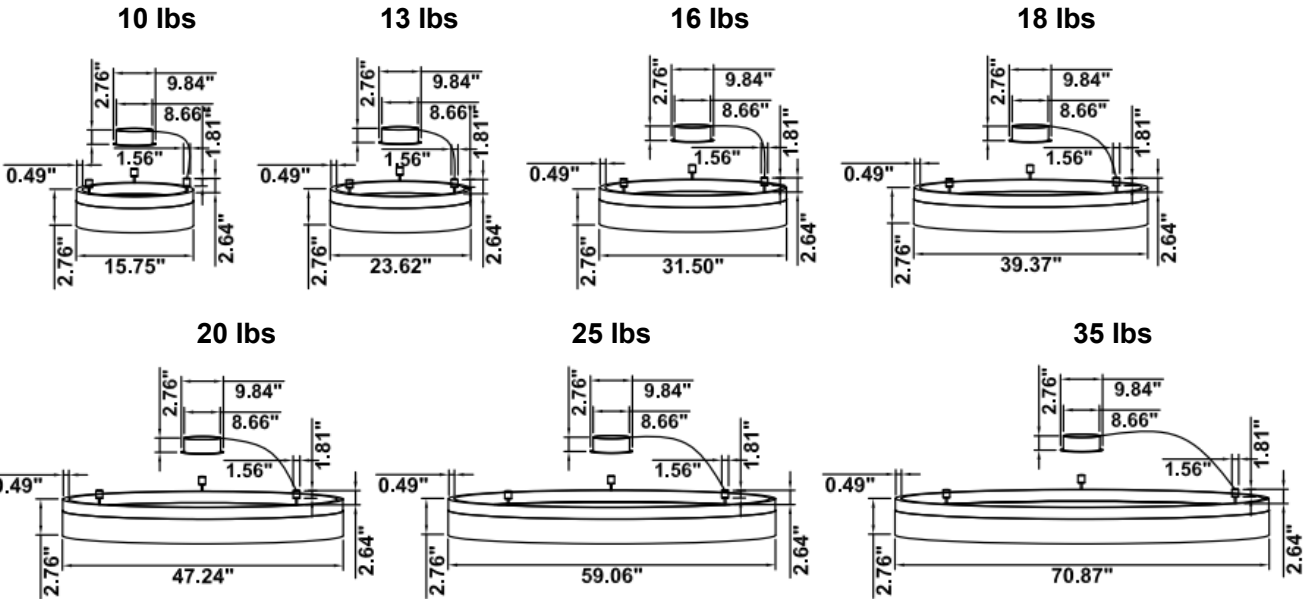


### 15.75" 20W @ 4000K

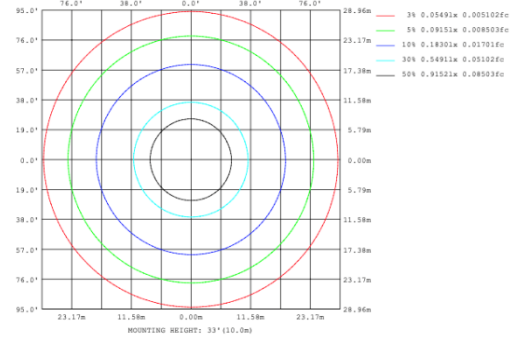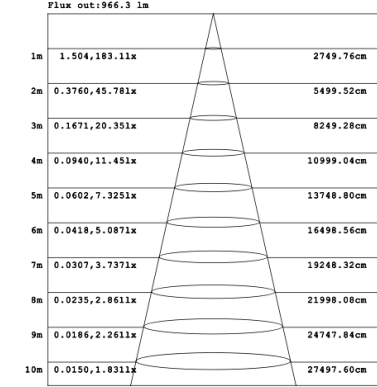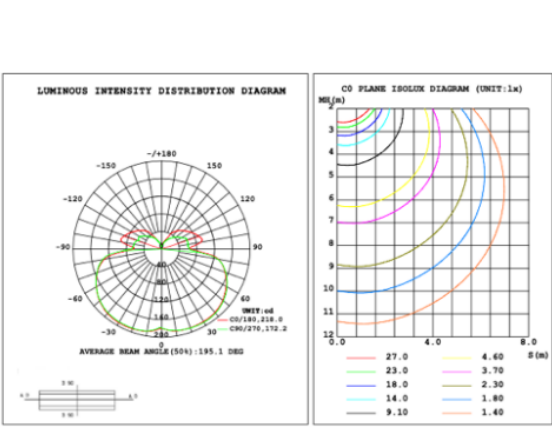




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### 23.62" 30W @ 4000K

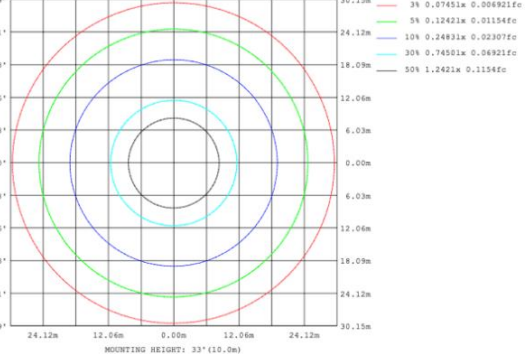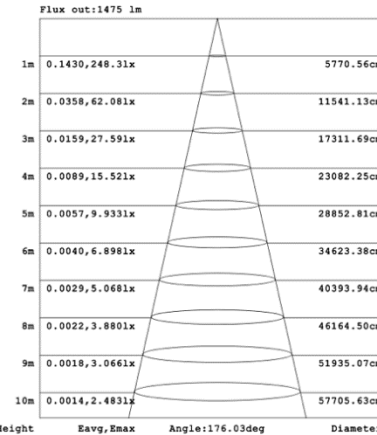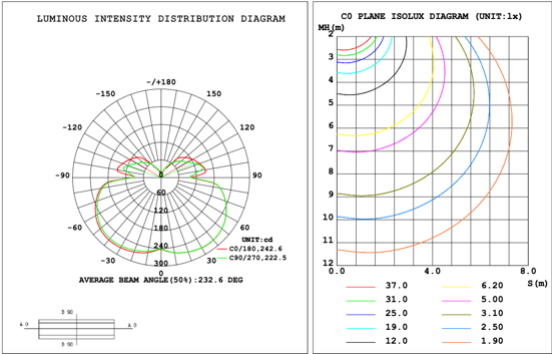





Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### 31.50" 40W @ 4000K


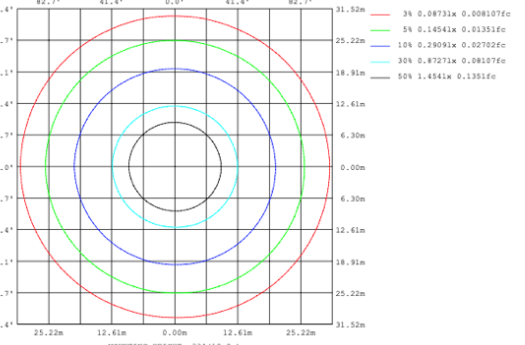
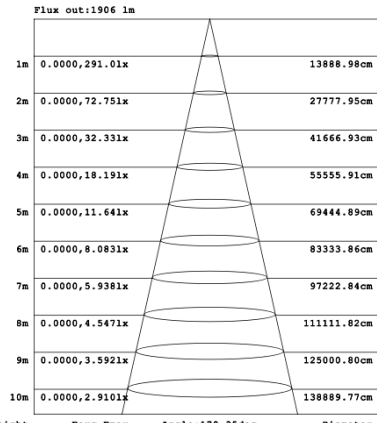
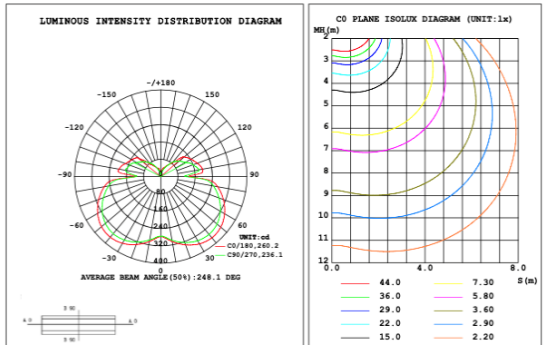


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.





## 39.37" 50W @ 4000K

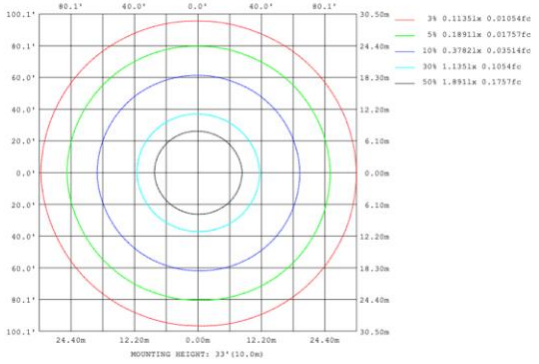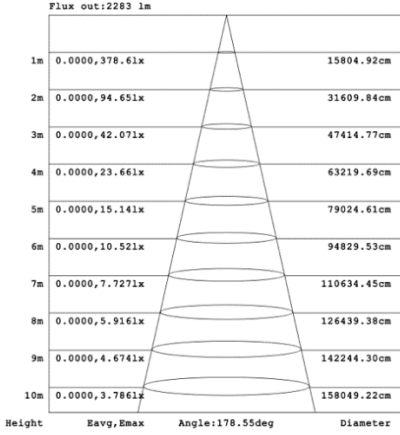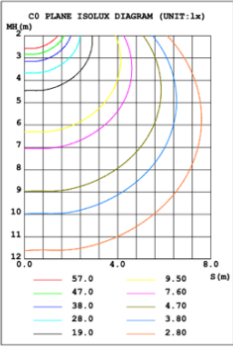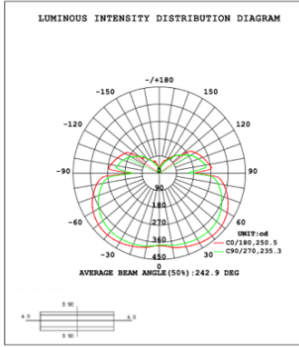

## 47.24" 60W @ 4000K

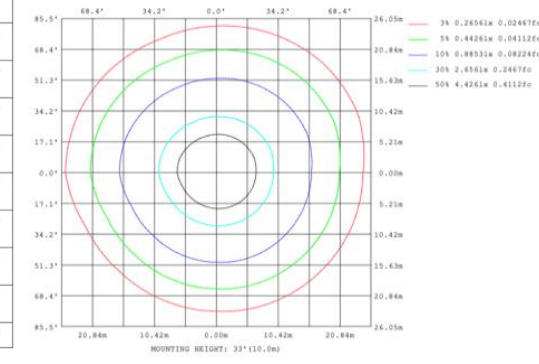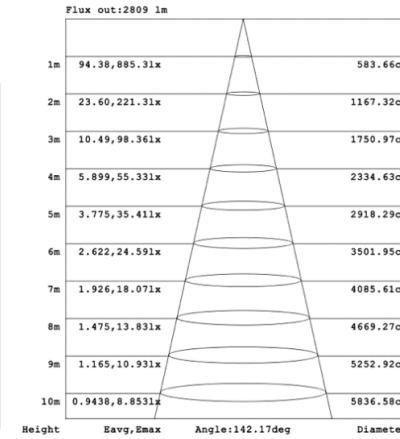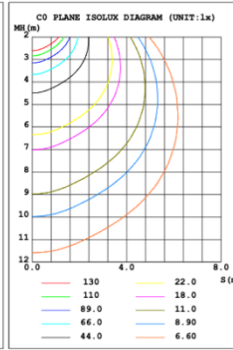
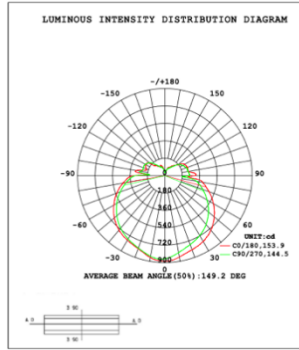


## 59.06" 70W @ 4000K

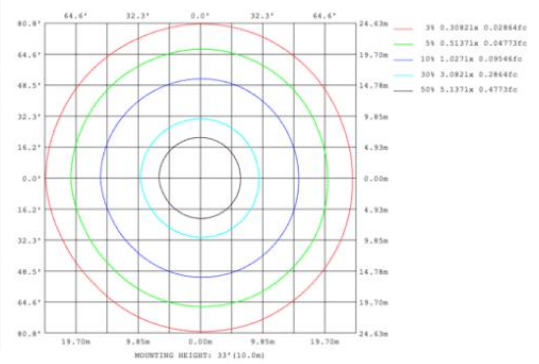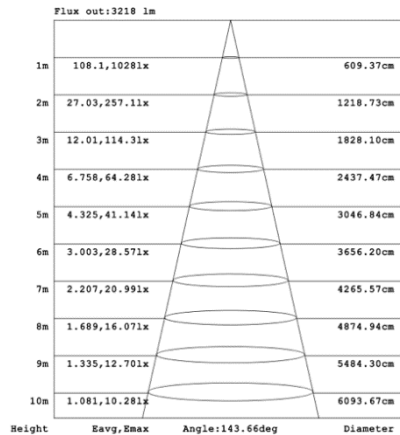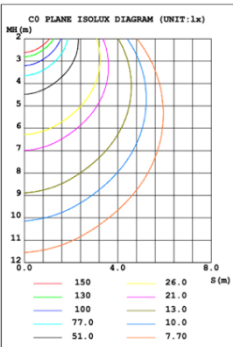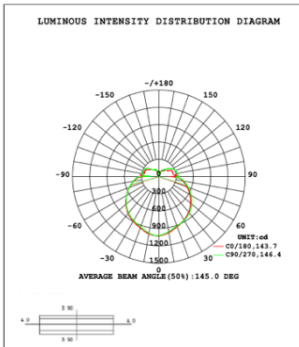



70.87" 80W @ 4000K

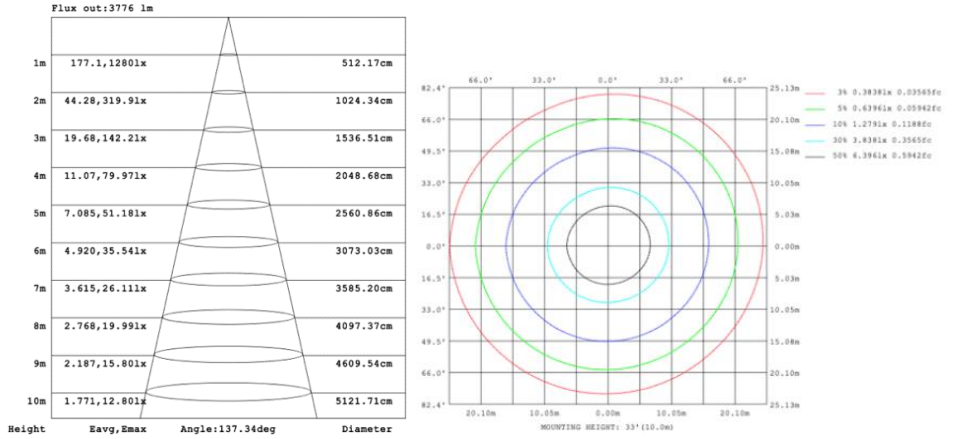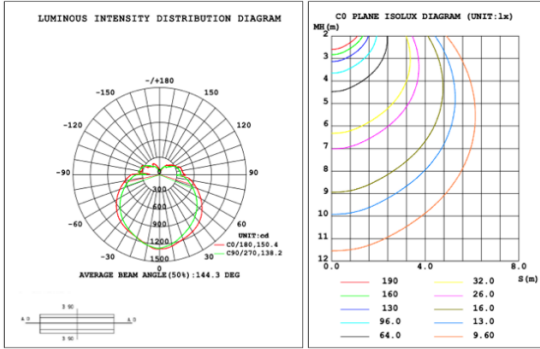


## Other Configuration



CIP-WH-D02



CIP-WH-D03

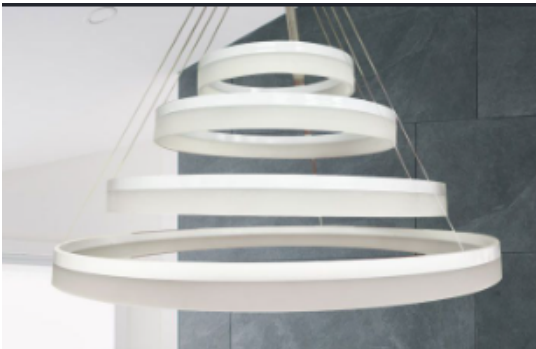

CIP-WH-D04



CIP-WH-D05



CIP-WH-D06