

INTRODUCTION

GTE2115: LED POST TOP LIGHT

FEATURE

Modern Post Top Area Lighting
 Upgrade LED Lighting Design
 Easy Installation and Maintenance
 Low-glare Uniform Light Distribution
 Color Rendering Index RA90
 Long Lifespan >50,000hours
 Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
 (D)Remote Driver Brand: GUBO
 (E)Built-in Driver Brand: GUBO
 Housing: Die-casted Aluminum
 Optics: Quadric Dome Reflector
 Diffuser: Clear PC Diffuser

INSTALLATION


Mounting Slip Fitter(D)-[FSC60]: Φ60mm
 Mounting Slip Fitter(E)-[FSC]: Φ60/Φ78mm
 Suitable for Road Light, like Street, Park,.....

STANDARD

Designed and Manufactured to Comply with
 CE/RoHS/CB/cETL/SAA Standard
 Withstand Voltage: 3.75KV, Surge: 6KV
 IP65 Protection, Class I Electric

OPTION

LED CCT: 1,800K~10,000K/R/G/B/A
 [CRI]: [E] RA80, [G] RA90, [H] RA97
 [Post]: Height 1M/1.2M/4M/6M
 [CSL]: Photocell Lux Sensor




Custom Housing Finish: Colors by RAL Code

WHITE RAL9010P **BLACK** RAL9005P **GREY** RAL7042P **DARK GREY** RAL7016P

CASE STUDY:



DIMENSION: [UNIT: MM]

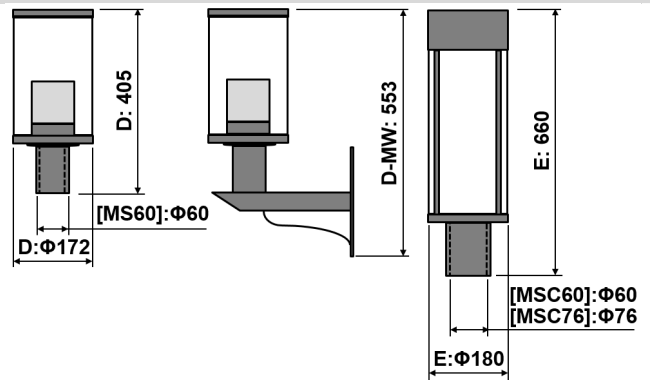

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTE2115D-FSC GTE2115D-FWU	30W	CXM11 COB	G2700K	RA90	1470	>0.9	T5:150°		AC100~277V [AC100~240V] [AC100~347V] 50/60Hz
			G3000K	RA90	1580				
			G3500K	RA90	1580				
			G4000K	RA90	1690				
			G5000K	RA90	1690				
GTE2115E-FSC	50W	60x2W SMD3030	G2700K	RA90	2890	>0.9	T5S:120°	[CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	[CV DC24V] [CV DC48V]
			G3000K	RA90	3000				
			G3500K	RA90	3190				
			G4000K	RA90	3190				
			G5000K	RA90	3190				
			G6500K	RA90	3190				
	2C@50W	TWG	G2700K	G6500K	RA90	2500	>0.7		
	3C@50W	RGB	620nm	520nm	465nm	\	2200	>0.6	
	4C@50W	RGBW	620nm	520nm	465nm	G2700K	\	2200	>0.6
	4C@50W	RGBA	620nm	520nm	465nm	590nm	\	2200	>0.5

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.