




## Specifications

CIP-TP260-(20-35W)-(color temp)-AC100-277V-(light distribution)-(mount tenon)-(finish color)


CIP-TP325-(50-100W)-(color temp)-AC100-277V-(light distribution)-(mount tenon)-(finish color)

Wattage	20W	35W	50W	60W	80W	100W
Installation height (Suggested)	7'-10'	10'-15'	15'-18'	15'-18'	18'-22'	20'-26'
LED Chips	SMD 3030, Philips or other LED chip					
Driver Brand	Meanwell / SOSEN, or other LED driver					
Material	Aluminum alloy+PC lens					
Color Temp	3000K / 4000K / 5000K / 6000K					
Lumen Efficacy	130-135lm / W (Can customize higher LM / W if in need)					
AC Input Voltage	100-277V / 120-347V / 180-480V					
Light Distribution	Type V (120°) / Type III (90°*140°)					
Mount Tenon	2 3/8" or 3" Round Tenon (Adapters available)					
Thermal Management	Superior thermal management with external Air-Flow fins					
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)					
Total Harmonic Distortion (THD)	< 15%					
Housing	Bronze or Black Finish					
Lifetime	50,000H					
IP Rating	IP65					
Warranty	5 years					


Compatible With Different Mount Brackets

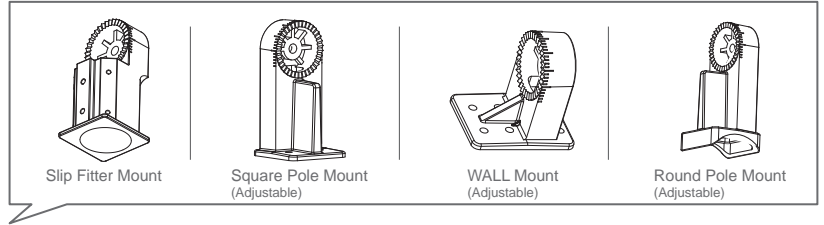

Two Mount for optional

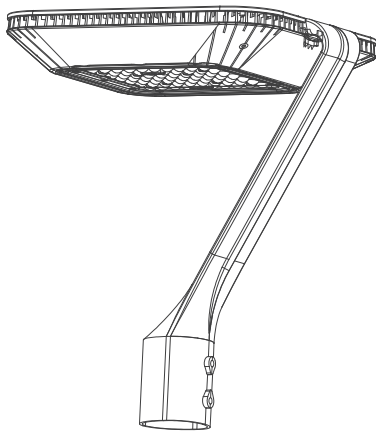


2 3/8" (60mm round pole)

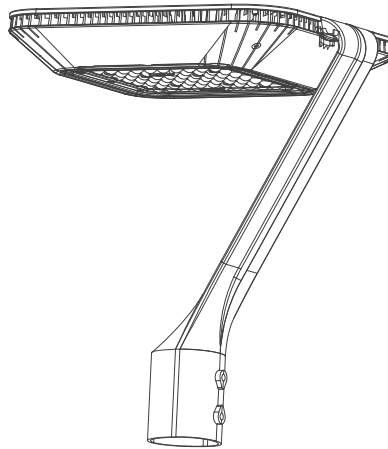


3" (76mm round pole)


Adapters (suitable for 2 3/8" mount )




4" SQ

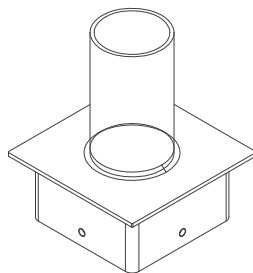


5" SQ



3" RD




4" RD




5" RD

**Light Distribution**


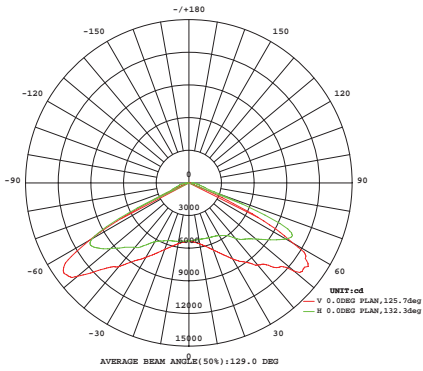


Type V (120°)

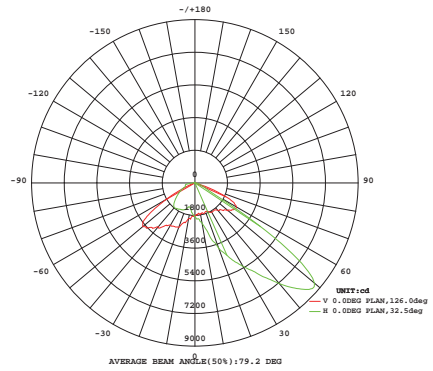


Type III (90\*140°)

**Dimension**

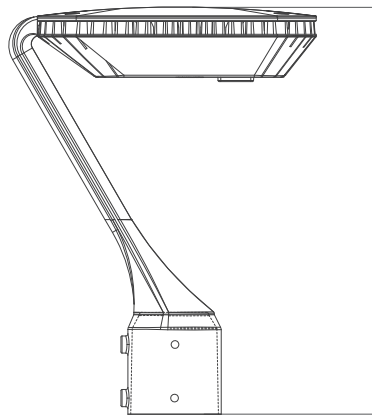
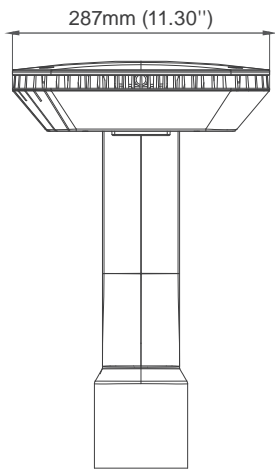


380mm(14.96")

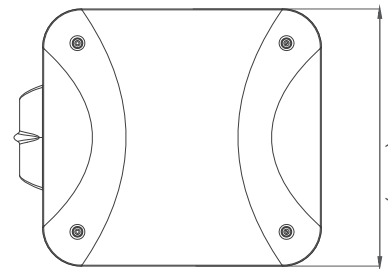


240mm(9.45")

**TP260**

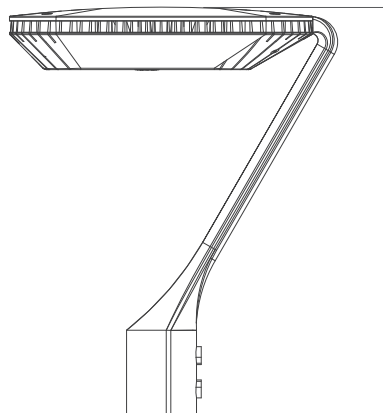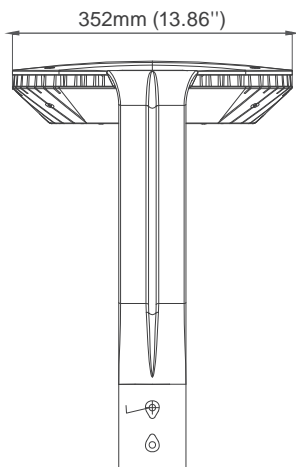

437mm(17.20")

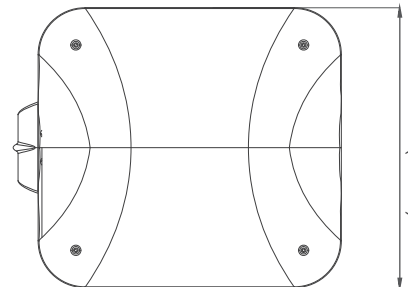

300mm(11.81")

**TP325**

**Applications**



**Building**



**Garden**




**Roadway**





**Parking Lot**





**Park**

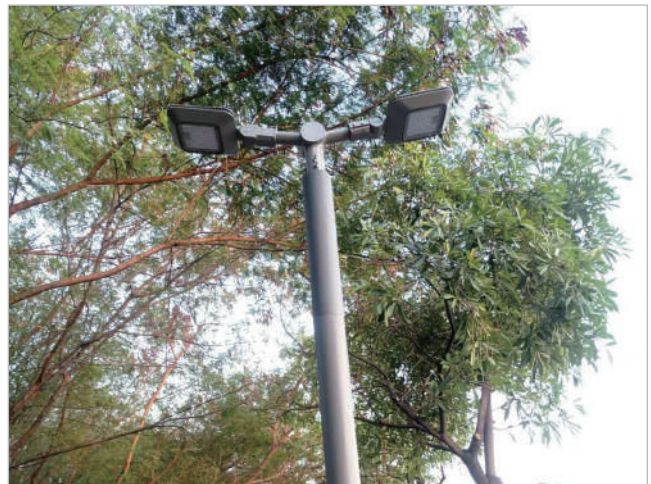

**Sidewalk**

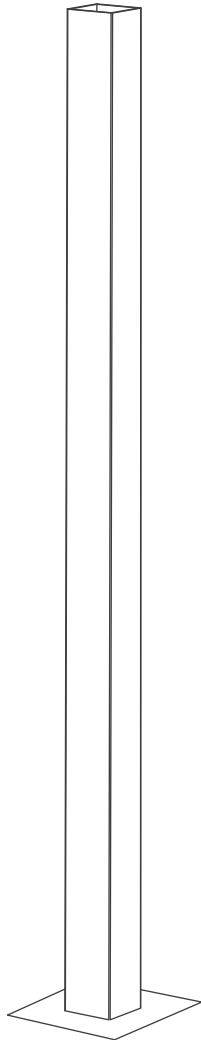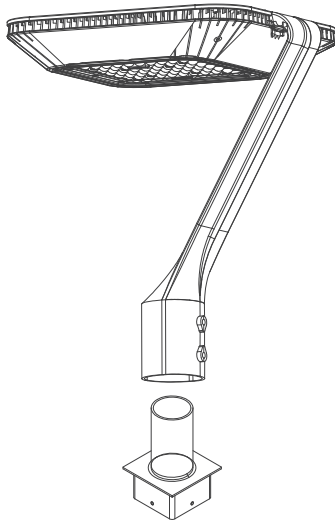


Square pole

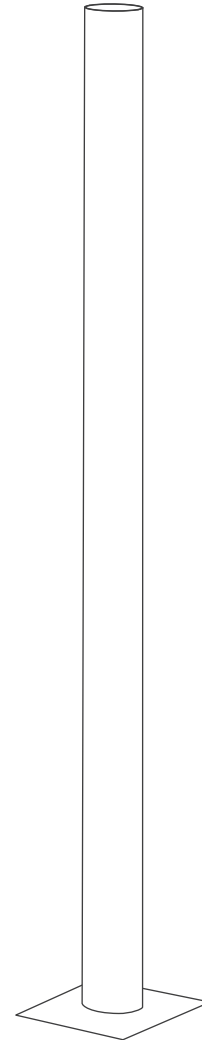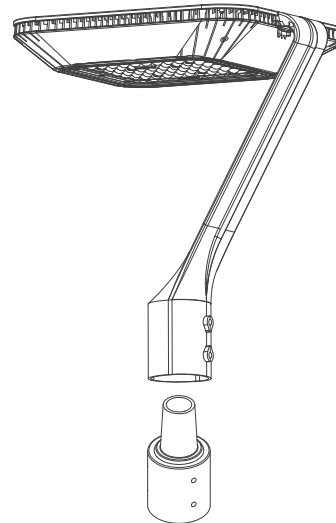

Round pole



# Packaging information

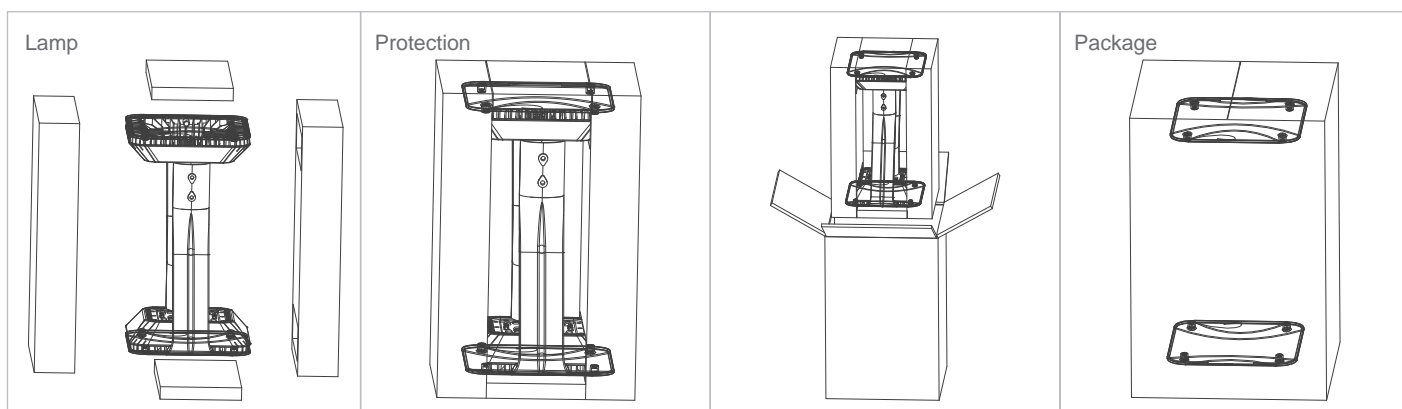

Wattage	Product Dimension (mm/in)	Carton Box Dimension (mm/in)	N.W (Kg/lb)	G.W (Kg/lb)	QTY / CTN
20W	380 x 287 x 240mm 14.96 x 11.30 x 9.45 in	290 x 510 x 380mm 10.24 x 20.08 x 14.96 in	2.6Kg(5.73lb)	6.0kg(13.23lb)	2 PCS
35W	380 x 287 x 240mm 14.96 x 11.30 x 9.45 in	290 x 510 x 380mm 10.24 x 20.08 x 14.96 in	2.6Kg(5.73lb)	6.0kg(13.23lb)	2 PCS
50W	380 x 287 x 240mm 14.96 x 11.30 x 9.45 in	290 x 510 x 380mm 10.24 x 20.08 x 14.96 in	2.7Kg(5.95lb)	6.4kg(14.11lb)	2 PCS
60W	437 x 352 x 300mm 17.20 x 13.86 x 11.81 in	580 x 320 x 410mm 22.83 x 12.60 x 16.14 in	7.3Kg(16.09lb)	15.2kg(33.50lb)	2 PCS
80W	437 x 352 x 300mm 17.20 x 13.86 x 11.81 in	580 x 320 x 410mm 22.83 x 12.60 x 16.14 in	7.3Kg(16.09lb)	15.2kg(33.50lb)	2 PCS
100W	437 x 352 x 300mm 17.20 x 13.86 x 11.81 in	580 x 320 x 410mm 22.83 x 12.60 x 16.14 in	7.5KG(16.53lb)	15.6kg(34.40lb)	2 PCS

