

Selectable LED Slim Canopy Light

Wattages: 26W,39W,52W,65W ; 45W,65W,90W,110W



WATT/CCT
SELECTABLE

The Selectable LED Slim Canopy Light can be widely used for Indoor or Outdoor Excellent for Gas station, Hallways, Multipurpose Rooms , Underground parking,super market, store and many other applications.

Lighting controls meet design lights consortium (DLC) networked lighting control system technical requirements, LLLC, Energy Monitoring and High End Trim function.



Features:

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design,high quality and better cooling for LED Tj < 85°C .
- Excellent Optics design, greatly improve the light utilization and evenness.
- **The 1-10V Dimming type is continuous.**
- Motion sensor Control Available (SOLD SEPARATELY).

Packaging information:

CP26395265W27-45K-D:

Carton Size:550mmX280mmX290mm
21.65"X11.02"X11.42"(6Pcs/CTN)

Inside the box:265mmX265mmX90mm
10.43"X10.43"X3.54"(1Pcs/CTN)

CP456590110W27-345K-D:

Carton Size:390mmX340mmX335mm
15.35"X13.39"X13.19"(3Pcs/CTN)


Inside the box:320mmX320mmX115mm
12.60"X12.60"X4.53"(1Pcs/CTN)

SPECIFICATION								
TYPE	CIP-CP26395265W27-45K-D				CIP-CP456590110W27-345K-D			
WATTAGE	26W	39W	52W	65W	45W	65W	90W	110W
LUMEN	3929 lm	5575 lm	7132 lm	8525 lm	7342 lm	11188 lm	14741 lm	17325 lm
EFFICACY	> 140 lm/W							
CCT	4000K,5000K				3000K,4000K,5000K			
CRI	> 70							
INPUT VOLTAGE	AC120-277V							
LIGHTING ANGLE	155°							
FACTORY SETTINGS	65W / 110W & 4000K							
LED TYPE	2835							
PF	> 0.95							
DRIVER EFFICIENCY	> 89%							
PROTECTION LEVEL	Wet location							
OPERATING TEMPERATURE	-40°F ~ 104°F							
LIFE TIME	> 50000 hours							
WARRANTY	5 year limited							

Selectable LED Slim Canopy Light

Wattages: 26W,39W,52W,65W ; 45W,65W,90W,110W



DIMENSION:

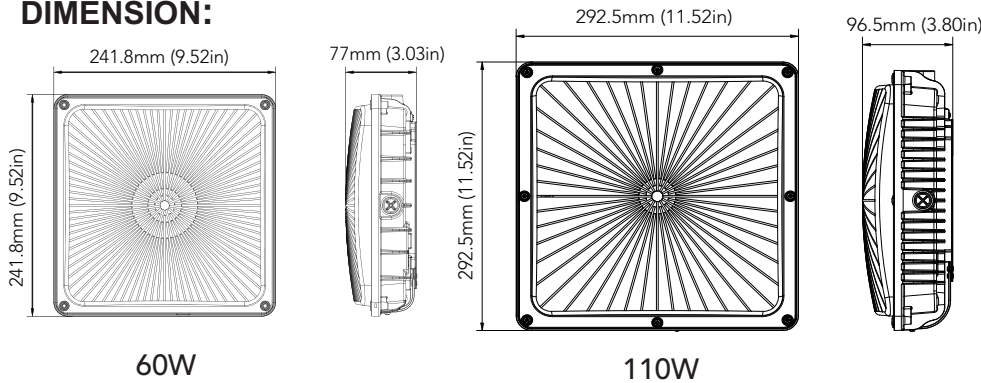

Specifications:

Shell materials: Aluminum & PC.
 Net weight : 2.31Kg (5.1 lbs)
 3.54Kg (7.8 lbs)
 Finish: Dark Bronze(Standard)
 Product Size:241.8mmX241.8mmX77mm
 9.52"X9.52"X3.03"
 292.5mmX292.5mmX96.5mm
 11.52"X11.52"X3.80"

Control Module:

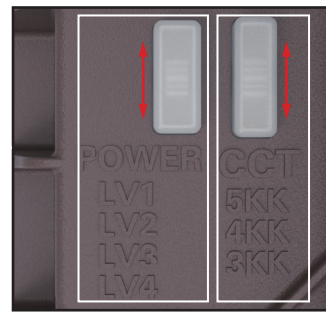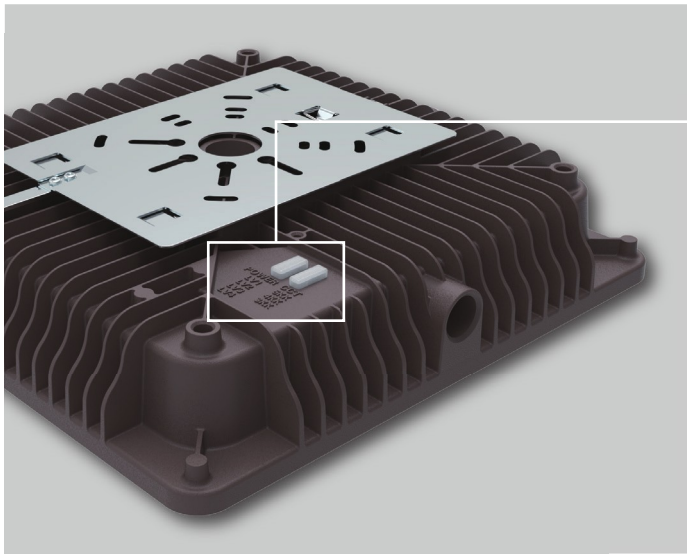

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT

40% 60% 80% 100%

Each model supports 4 positions wattage regulation: 100%, 80%, 60%, 40%

CCT SELECT


3000K 4000K 5000K

Offer three CCT adjustable (3000K, 4000K, 5000K) .

CONTROLS (SOLD SEPARATELY)



NLC-MW-SQ-005
 Microwave Motion Sensor
 (Sensing range: Approximately 12 Feet)



NLC-MW-SQ-006
 Microwave Motion Sensor
 (Sensing range: Approximately 40 Feet)



RC-100
 Microwave Sensor Remote Controller

ORDERING INFORMATION:

EXAMPLE: **CIP-CP456590110W27-345K-Z[D,W,B,S]-Y[Blank,P]-E[Blank,M]**

CIP	CP	456590110W	27	345K	Z	Y	E
COMPANY	PRODUCT	POWER	VOLTAGE	CCT	FINISH	CONTROL	CONTROL
CIP	CP Led Slim Canopy	26395265 26W/39W 52W/65W 456590110W 45W/65W 90W/110W	27 AC120-277V	45K/345K 3000K/4000K/5000K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P - (Photocell)	M Motion Sensor

Selectable LED Slim Canopy Light




Wattages: 26W,39W,52W,65W ; 45W,65W,90W,110W

PHOTOMETRICS:

For complete IES files, please visit our website.

CIP-CP26395265W27-45K-D (65W&4000K)

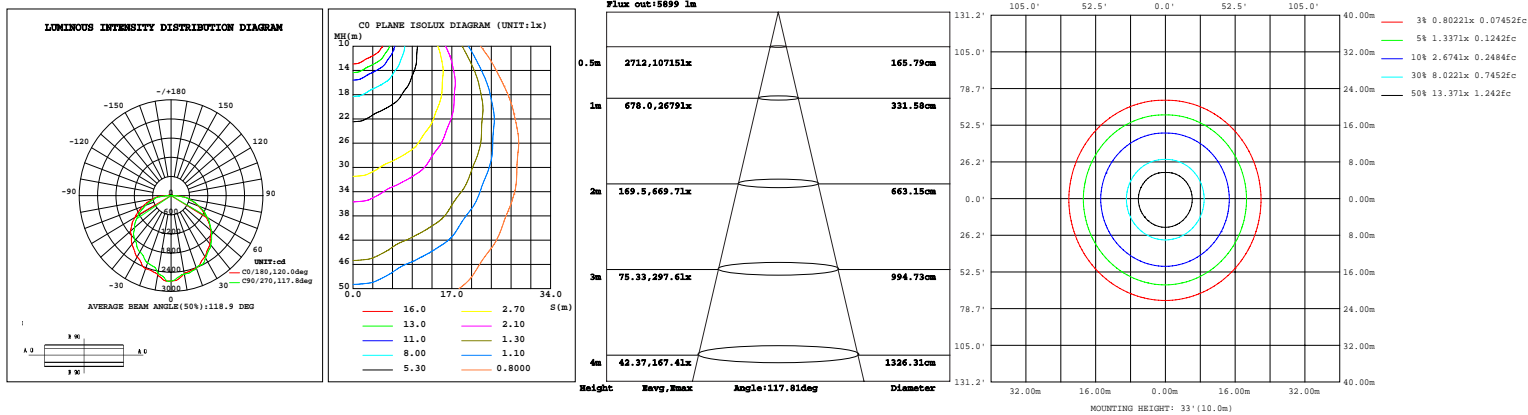

CIP-CP456590110W27-345K-D (110W&4000K)

