

# LED Slim Canopy Light

Wattages: 26W,39W,52W,65W



**WATT/CCT**  
SELECTABLE

The LED Slim Canopy Light Series can be widely used for Indoor or Outdoor Excellent for Gas station, Hallways, Multipurpose Rooms , Underground parking,super market, store and many other applications.



ROHS  
COMPLIANT



## Features:

- Lumileds LED, high luminous efficiency and long working life .
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design,high quality and better cooling for LED  $T_j < 85^{\circ}\text{C}$  .
- Excellent Optics design, greatly improve the light utilization and evenness.
- **The 1-10V Dimming type is continuous.**
- Motion sensor Control Available (SOLD SEPARATELY).

## Packaging information:

❖**CIP-CP26395265W27-45K:**

Carton Size:565mmX290mmX255mm  
22.24"X11.42"X10.04"(4Pcs/CTN)


Inside the box:270mmX270mmX110mm  
10.63"X10.63"X4.33"

| SPECIFICATION     |                       |                     |                     |                     |
|-------------------|-----------------------|---------------------|---------------------|---------------------|
| TYPE              | CIP-CP26395265W27-45K |                     |                     |                     |
| WATTAGE           | 26W                   | 39W                 | 52W                 | 65W                 |
| LUMEN             | 3929 lm (26W&4000K)   | 5575 lm (39W&4000K) | 7132 lm (52W&4000K) | 8525 lm (65W&4000K) |
| EFFICACY          | > 140 lm/W            |                     |                     |                     |
| CCT               | 4000K,5000K           |                     |                     |                     |
| CRI               | > 70                  |                     |                     |                     |
| INPUT VOLTAGE     | AC120-277V            |                     |                     |                     |
| LIGHTING ANGLE    | 118°                  |                     |                     |                     |
| FACTORY SETTINGS  | 65W & 4000K           |                     |                     |                     |
| LED TYPE          | 2835                  |                     |                     |                     |
| PF                | > 0.95                |                     |                     |                     |
| DRIVER EFFICIENCY | > 89%                 |                     |                     |                     |
| PROTECTION LEVEL  | WET                   |                     |                     |                     |
| LIFE TIME         | > 50000 hours         |                     |                     |                     |
| WARRANTY          | 5 year limited        |                     |                     |                     |

# LED Slim Canopy Light

Wattages: 26W,39W,52W,65W


## DIMENSION:

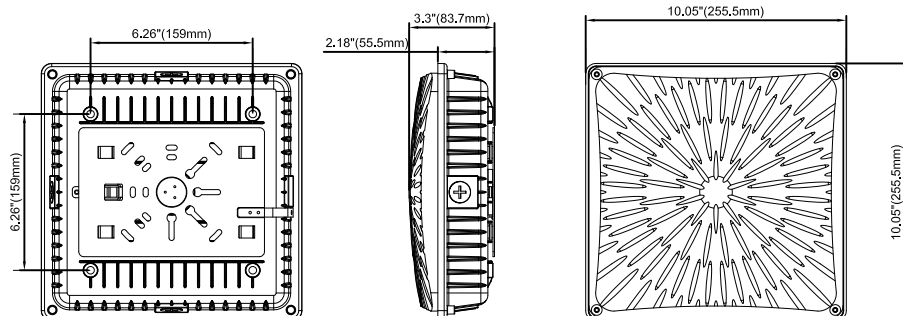

## Specifications:

Shell materials: Aluminum & PC.  
Net weight : 2.7Kg (6.0 lbs)  
Finish: Dark Bronze(Standard)  
Product Size:255.5mmX255.5mmX83.7mm  
10.05"X10.05"X3.3"

## Control Module:

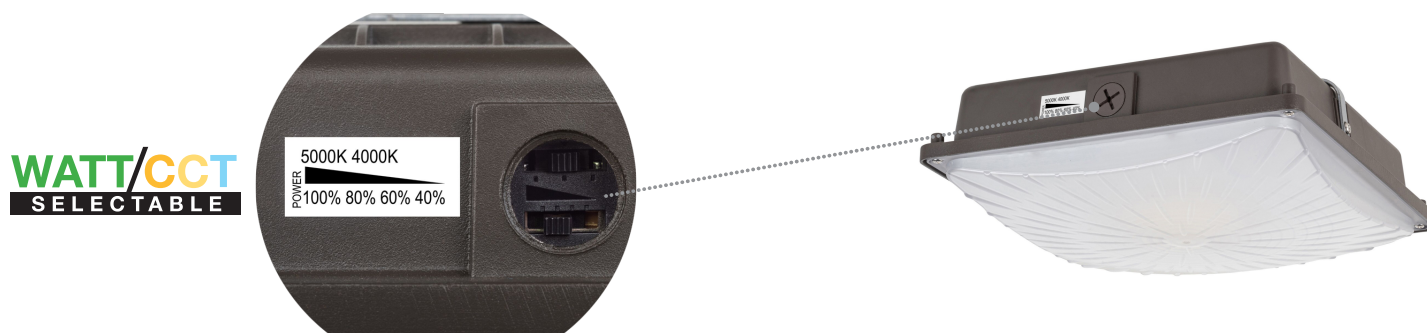

## ORDERING INFORMATION:

### EXAMPLE:

**CIP-CP26395265W27-45K-Z [finish] -M [blank for no control / M for optional control]**

| CIP          | CP                       | 26395265                       | 27               | 45K                | Z                                                        | M                  |
|--------------|--------------------------|--------------------------------|------------------|--------------------|----------------------------------------------------------|--------------------|
| COMPANY      | PRODUCT                  | POWER                          | VOLTAGE          | CCT                | FINISH                                                   | CONTROL            |
| CIP Lighting | CP<br>Led Slim<br>Canopy | 26395265<br>26W/39W<br>52W/65W | 27<br>AC120-277V | 45K<br>4000K/5000K | D (Dark Bronze)<br>W (White)<br>B (Black)<br>S (Silvery) | M<br>Motion Sensor |

# LED Slim Canopy Light




Wattages: 26W,39W,52W,65W

## PHOTOMETRICS:

For complete IES files, please ask

### CIP-CP26395265W27-45K (65W&4000K)

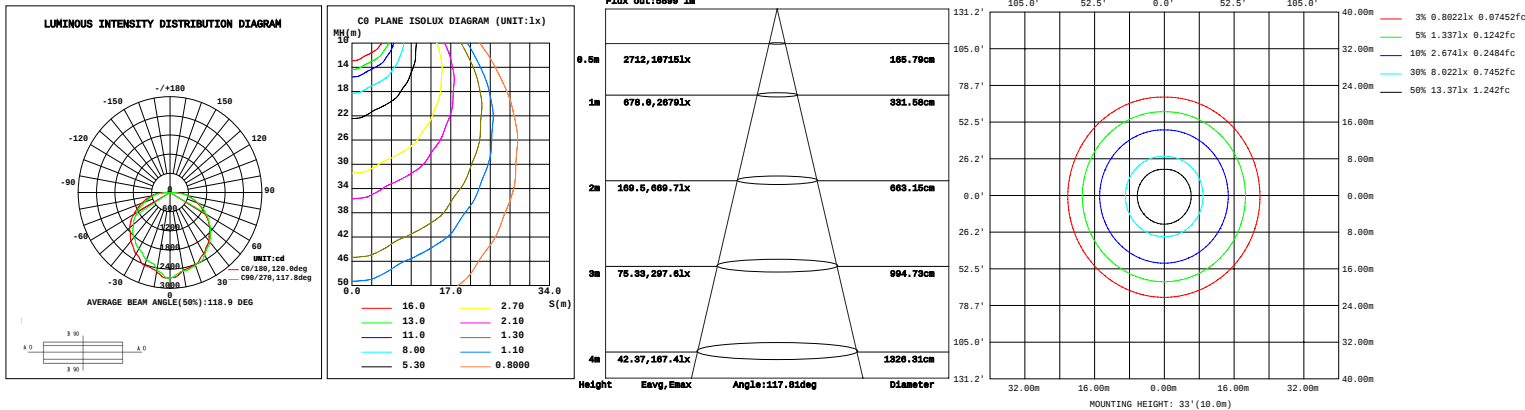

### CIP-CP26395265W27-45K (65W&5000K)

