Walter

Medium Full Cutoff Wall Pack

A medium full-cutoff wall pack that replaces HID systems from 175W to 400W MH or HPS, in Type III or Type V optics with a clear or prismatic tempered glass lens. Die-cast hinged housing for retail, industrial parks, schools, transit and medical facilities. Recommended mounting height 12–18 ft.

- Two optics — Type III or Type V
- Replaces 175–400W MH / HPS · 25 / 37 / 50W
- Clear or prismatic tempered flat glass lens
- 6kV surge protection · 0–10V dimming standard



DLC | cETLus | IP65 | Wet Location | TAA

BAA Compliant

LUMEN OUTPUT	Up to 5,974 lm
EFFICACY	Up to 110 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K
CRI	70+ (Ra)
DISTRIBUTION	Type III · Type V
LED SOURCE	EasyLED aluminum boards
WATTAGE	25 / 37 / 50W
VOLTAGE	120–277V AC · 347–480V AC
POWER FACTOR	>0.90 · THD <20%
DIMMING	0–10V (100–10%)
SURGE PROTECTION	6kV internal

DRIVER	Electronic · 0–10V dimming
FINISH	Bronze, Custom
OPERATING TEMP	−40°C to +40°C
IP / IMPACT	IP65 · Wet Location
MATERIAL	Die-cast aluminum · tempered flat glass lens
LENS	Tempered clear or prismatic flat glass
MOUNTING	Over a 4″ recessed outlet box, or ½″ surface conduit
DIMENSIONS	14¼″ W × 11⅜″ L × 9⅛″ H
LIFETIME	L70 213,000 hrs @25°C
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	VOLTAGE	WATTAGE	CCT	DISTRIBUTION	LENS	CONTROLS	OPTIONS	FINISH
WALTER	U 120–277V H 347–480V	25 25W	40 4000K	T5 Type V	CG Clear Glass PG Prismatic Glass*	DV 0–10V Dimming (standard)	N None PC Photocell** MWD Microwave + Dim** MW Motion On/Off** SF Single Fuse** DF Double Fuse** SP Surge Protection BU Battery 90 min** BUC Cold-Start Batt**	BZ Bronze CC Custom
		25 25W	50 5000K	T3 Type III T5 Type V				
		37 37W 50 50W	30 3000K	T3 Type III				
		37 37W 50 50W	40 4000K 50 5000K	T3 Type III T5 Type V				

* Prismatic lens (PG) is available on Type V (T5) only. ** Fusing, sensors and battery options require 120–277V (U).

Build Your Order Code — example values shown in grey

MODEL		VOLTAGE		WATTAGE		CCT		DISTRIBUTION		LENS		CONTROLS		OPTIONS		FINISH
	–		–		–		–		–		–		–		–	
WALTER		U		37		40		T3		CG		DV		N		BZ

STANDARD FINISHES




BZ
Bronze

CC
Custom

DIMENSIONS

FIXTURE	HEIGHT (A)	LENGTH (B)	WIDTH (D)
Overall	9⅛" (232 mm)	11⅜" (289 mm)	14¼" (362 mm)

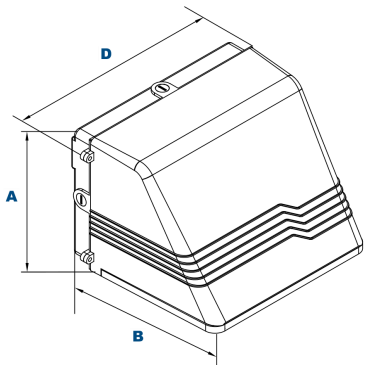

OPTIONS

CONTROLS

DV	0–10V dimming (100–10%)
PC	Photocell, 120–277VAC
MWD	Microwave sensor with dimming, 8–40 ft mounting
MW	Microwave on/off motion sensor, 8–19 ft mounting


PROTECTION & EMERGENCY

SF	Single fuse
DF	Double fuse
SP	Surge protection
BU	Battery backup, 90 minutes
BUC	Cold-start battery backup, –20°C, 90 minutes


ACCESSORIES (SOLD SEPARATELY)

WPC15LG	Clear polycarbonate vandal-resistant guard
WPC15WG	Stainless steel wire guard
SSBS	Stainless steel bird spikes

PHOTOMETRY

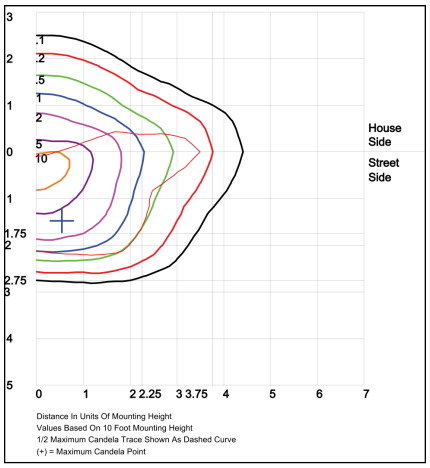

TYPE III · 50W · 5000K

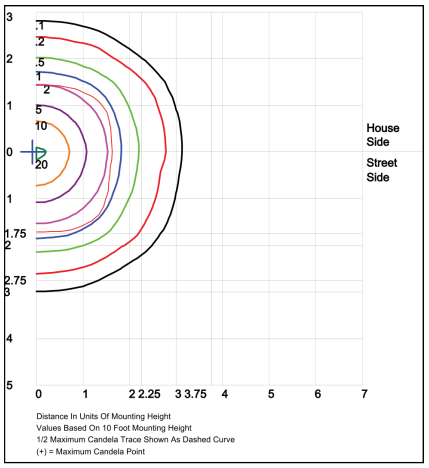

TYPE V · 50W · 5000K

DELIVERED LUMENS

Optic	CCT	25W 27.1W	37W 40.6W	50W 54.2W
T3 Type III	3000K	–	3,784 lm	5,046 lm
	4000K	–	4,105 lm	5,473 lm
	5000K	2,851 lm	4,276 lm	5,701 lm
	BUG	B1-U2-G1	B1-U2-G1	B1-U2-G1
T5 Type V	3000K	–	–	–
	4000K	2,867 lm	4,301 lm	5,735 lm
	5000K	2,987 lm	4,480 lm	5,974 lm
	BUG	B1-U2-G0	B2-U2-G0	B2-U2-G0

Delivered lumens by optic. DLC qualified: 37W, 5000K, both optics.

DISTRIBUTION Type III · Type V **EFFICACY** Up to 110 lm/W