

# BENTO

## Wet-Location Compact Exit Sign

A compact double-sided exit sign with red lettering in a white injection-molded thermoplastic housing. Wet-location rated with an integrated nickel-cadmium battery providing 90 minutes of emergency operation. Mounts to a universal J-box.

- 6 in. letter height with a 3/4 in. stroke, double sided
- Super-bright red LED letters — 10 LEDs per unit
- 120 / 277VAC dual voltage operation at 2.9W
- Integral 3.6V 1200mAh nickel-cadmium battery, 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Universal J-box mounting · wet location rated



UL

FCC

CEC

DOE

RoHS

Wet Location

|                   |                                         |
|-------------------|-----------------------------------------|
| LETTER HEIGHT     | 6" (152 mm) · 3/4" stroke, double sided |
| LED SOURCE        | 10 × LED — red                          |
| WATTAGE           | 2.9W                                    |
| VOLTAGE           | 120 / 277V AC dual voltage              |
| BATTERY           | 3.6V 1200mAh nickel-cadmium, integral   |
| EMERGENCY RUNTIME | 90 minutes                              |

|               |                                                                    |
|---------------|--------------------------------------------------------------------|
| RECHARGE TIME | 24 hours maximum                                                   |
| FINISH        | White                                                              |
| MATERIAL      | Injection-molded thermoplastic ABS housing · UL 94V-0 flame rating |
| MOUNTING      | Universal J-box mounting                                           |
| DIMENSIONS    | 12.50" W × 8.00" H × 2.50" D                                       |
| WARRANTY      | 5-Year electrical parts & housing                                  |

## ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


| MODEL | FACE            | LETTER        | FINISH   |
|-------|-----------------|---------------|----------|
| BENTO | 2S Double Sided | R Red Letters | WH White |

**Build Your Order Code** — example values shown in grey

| MODEL                | FACE                 | LETTER               | FINISH               |
|----------------------|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| BENTO                | 2S                   | R                    | WH                   |

## DIMENSIONS

| MODEL | WIDTH           | HEIGHT         | DEPTH         | LETTER HEIGHT  |
|-------|-----------------|----------------|---------------|----------------|
| BENTO | 12.50" (318 mm) | 8.00" (203 mm) | 2.50" (64 mm) | 6.00" (152 mm) |

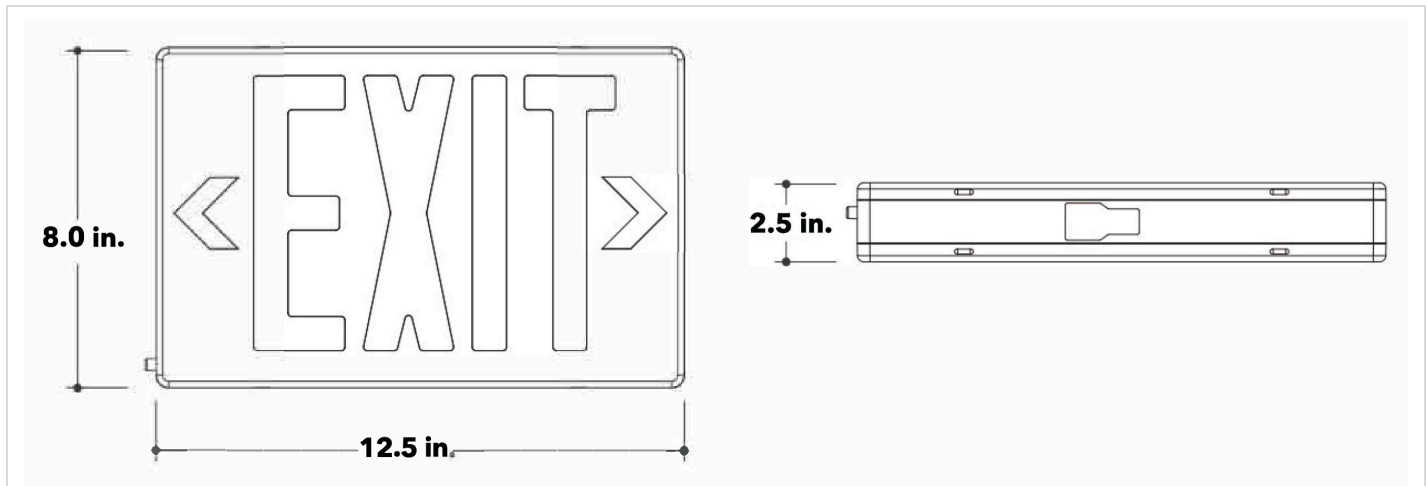

BENTO WET-LOCATION COMPACT EXIT SIGN — FRONT ELEVATION AND TOP VIEW.

## ELECTRICAL & EMERGENCY PERFORMANCE

| MODEL | RATED VOLTAGE | INPUT CURRENT  | INPUT WATT | LED SOURCE   | RECHARGE | EMERGENCY RUNTIME |
|-------|---------------|----------------|------------|--------------|----------|-------------------|
| BENTO | 120 / 277V    | 0.026 – 0.015A | 2.9W       | 10 × Red LED | 24 hrs   | 90 min            |

Values as published by the manufacturer. Contact CIP for custom configurations.