


MILOS

Single-Sided Edge-Lit Exit Sign

A single-sided edge-lit exit sign with red lettering on a clear acrylic panel and extruded aluminum housing. An integrated nickel-cadmium battery provides 90 minutes of emergency operation. A universal mounting plate allows top, back, or end mounting, with removable directional indicators.

- 6 in. letter height with a 3/4 in. stroke, single sided
- Super-bright red LED letters — 8 LEDs per unit
- 120 / 277VAC dual voltage operation at 2.5W
- Integral 4.8V 400mAh nickel-cadmium battery, 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- Aluminum housing with high-grade clear acrylic panel and silver mylar finish
- Universal aluminum plate — top, back or end mount
- Removable directional indicators · damp location rated



LETTER HEIGHT	6" (152 mm) · 3/4" stroke, single sided
LED SOURCE	8 × LED — red
WATTAGE	2.5W
VOLTAGE	120 / 277V AC dual voltage
BATTERY	4.8V 400mAh nickel-cadmium, integral
EMERGENCY RUNTIME	90 minutes

RECHARGE TIME	24 hours maximum
FINISH	Silver mylar (aluminum housing)
MATERIAL	Extruded aluminum housing · clear acrylic panel · silver mylar finish
MOUNTING	Universal aluminum plate — top, back or end mount
DIMENSIONS	12.10" W × 9.70" H × 2.90" D
WARRANTY	5-Year electrical parts & housing · 3-Year battery

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	FACE	LETTER
MILOS	1S Single Sided	R Red Letters

Build Your Order Code — example values shown in grey

MODEL	FACE	LETTER
MILOS	1S	R

DIMENSIONS

MODEL	WIDTH	HEIGHT	DEPTH	LETTER HEIGHT
MILOS	12.10" (307 mm)	9.70" (246 mm)	2.90" (74 mm)	6.00" (152 mm)

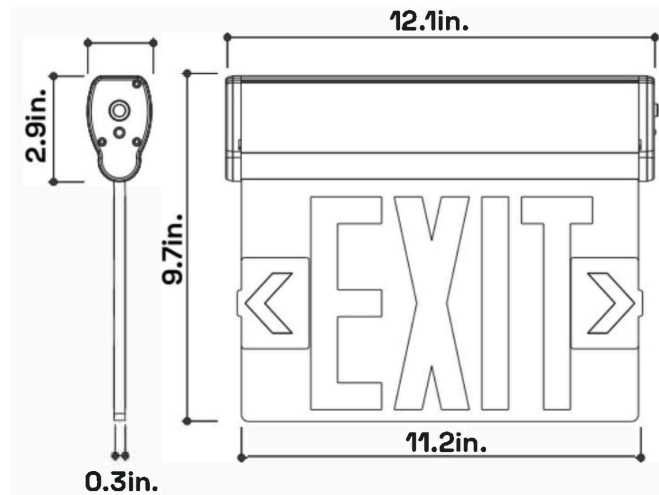

MILOS SINGLE-SIDED EDGE-LIT SIGN — CANOPY PROFILE AND FRONT ELEVATION. ACRYLIC PANEL 11.20" WIDE × 0.30" THICK.

ELECTRICAL & EMERGENCY PERFORMANCE

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED SOURCE	RECHARGE	EMERGENCY RUNTIME
MILOS	120 / 277V	0.027 ~ 0.031A	2.5W	8 × Red LED	24 hrs	90 min

Values as published by the manufacturer. Contact CIP for custom configurations.