


## CURVED MAGNETIC TRACK LED PENDANT



(A-D40)



## INTRODUCTION

### FEATURE

- Anti-glare Uniform Lighting UGR≤16
- Long Lifespan Design>50,000Hours
- Working Temperature: -20°C~40°C

### MAIN MATERIAL

- LED BRAND: GUBO
- LED Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Optics: High Efficiency PMMA Lens

### INSTALLATION

- W20 Magnetic Track Slotted
- Suitable for Interior Lighting

### STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/SAA/Erp/cETL/FCC
- IP20 Protection, Class III Electric

### OPTION

- LED CCT: 1,800K~10,000K/R/G/B/Y
- [CRI]: Ra80, [G] Ra90, [H] RA97
- Custom Housing Finished Color:


#### Custom Housing Finished Color:

MATT WHITE [HMWT]	MATT BLACK [HMBK]		
-------------------	-------------------	--	--

DIMENSION: [UNIT: MM]

[GL]LOUVER

CASE STUDY:

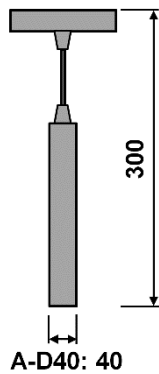

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE CONTROL	INPUT [V]
GTR4465A-D40	7W	CXM-6 COB	G2700K	RA90	550	>0.5	BL24D:24°	[CDP]:PWM(1%)  [REMOTE DRIVER] [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDZ]:ZIGBEE(1%) [CRF]:2.4GRF(1%)	DC24V [DC48V]  [REMOTE DRIVER] AC220~240V [AC100~240V] [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	580				
			G3500K	RA90	580				
			G4000K	RA90	600				
			G5000K	RA90	600				
			H2700K	RA97	480				
			H3000K	RA97	500				
			H3500K	RA97	500				
	H4000K	RA97	550						
2C@7W	TGW	G2700K	G6000K	RA90	380	>0.5			

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment. Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±3.