

# EINO

## LED Recessed Step Light

A compact 2" square recessed step light in solid brass for walls, risers, and hardscape applications. Features a machined face with tempered-glass aperture and is available in 2W, 3W, or 6W outputs. Four beam angles from a 19° spot to a 120° wide flood.

- Solid brass body — 2" square face, 1/8" flange, 3/8" behind the wall
- Four beam angles — 19° spot · 38° flood · 54° wide flood · 120° wide angle flood
- Three outputs — 2W / 3W / 6W at 200 / 300 / 400 lm
- Seven colours — 2200K · 2700K · 3000K · 4000K · 5000K · 6500K · RGBW
- Clear or frosted tempered glass over the FB-2W-CYL optical engine
- Fourteen finishes — nine brass and patina, five PVD Premium
- cULus wet listed · Made in USA



cULus

Wet Location

Made in USA

|                  |                                                               |
|------------------|---------------------------------------------------------------|
| LUMEN OUTPUT     | 200 / 300 / 400 lm (by wattage)                               |
| COLOR TEMP / CCT | 2200K / 2700K / 3000K / 4000K / 5000K / 6500K · RGBW          |
| BEAM ANGLE       | 19° spot · 38° flood · 54° wide flood · 120° wide angle flood |
| WATTAGE          | 2W / 3W / 6W                                                  |
| VOLTAGE          | 120V AC or 12–15V DC                                          |

|          |                                                                                              |
|----------|----------------------------------------------------------------------------------------------|
| FINISH   | Matte Bronze, Verde, Moss, Black, Rusty, Satin Brass, Aged Brass, Raw Copper, Natural Copper |
| MATERIAL | Solid brass                                                                                  |
| LENS     | Tempered glass — clear or frosted                                                            |
| MOUNTING | Recessed — 1 3/4" OD rough-in or concrete pour sleeve                                        |

## ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

| MODEL | WATTAGE | VOLTAGE       | CCT      | BEAM                      | LENS       | OPTIONS                  | FINISH                    |      |    |
|-------|---------|---------------|----------|---------------------------|------------|--------------------------|---------------------------|------|----|
| EINO  | 2 2W    | AC120 120V AC | 22 2200K | 19 19° spot               | CA Clear   | N None                   | MBZ                       | VD   | MO |
|       | 3 3W    | DC12 12V DC   | 27 2700K | 38 38° flood              | FA Frosted | PS6 Pour sleeve          | BK                        | RU   | SB |
|       | 6 6W    |               | 30 3000K | 54 54° wide flood         |            | PSQ Pour sleeve, flanged | AGB                       | RC   | NC |
|       |         |               | 40 4000K | 120 120° wide angle flood |            | PVDP                     | PVDS                      | PVDG |    |
|       |         |               | 50 5000K |                           |            | PST Pour sleeve, plate   | PVDZ                      | PVDK |    |
|       |         |               | 65 6500K |                           |            | PSC Pour sleeve, tabs    |                           |      |    |
|       |         |               |          |                           |            | RGBW                     | PSC Pour sleeve, threaded |      |    |

### Build Your Order Code — example values shown in grey

|                      |         |                      |     |                      |      |                      |        |                      |
|----------------------|---------|----------------------|-----|----------------------|------|----------------------|--------|----------------------|
| MODEL                | WATTAGE | VOLTAGE              | CCT | BEAM                 | LENS | OPTIONS              | FINISH |                      |
| <input type="text"/> | -       | <input type="text"/> | -   | <input type="text"/> | -    | <input type="text"/> | -      | <input type="text"/> |
| EINO                 | 2       | AC120                | 27  | 120                  | CA   | PS6                  |        | PVDS                 |


### STANDARD FINISHES




MBZ  
Matte Bronze




VD  
Verde



MO  
Moss



BK  
Black



RU  
Rusty



SB  
Satin Brass



AGB  
Aged Brass



RC  
Raw Copper



NC  
Natural Copper

### PVD PREMIUM FINISHES




PVDP  
PVD Polished



PVDS  
PVD Satin



PVDG  
PVD Graphite




PVDZ  
PVD Bronze



PVDK  
PVD Black


## DIMENSIONS

| MODEL | FACE (W × H)         | DEPTH BEHIND FACE | BODY HEIGHT     | FLANGE      |
|-------|----------------------|-------------------|-----------------|-------------|
| EINO  | 2" × 2" (51 × 51 mm) | 3 3/8" (86 mm)    | 1 9/16" (40 mm) | 1/8" (3 mm) |

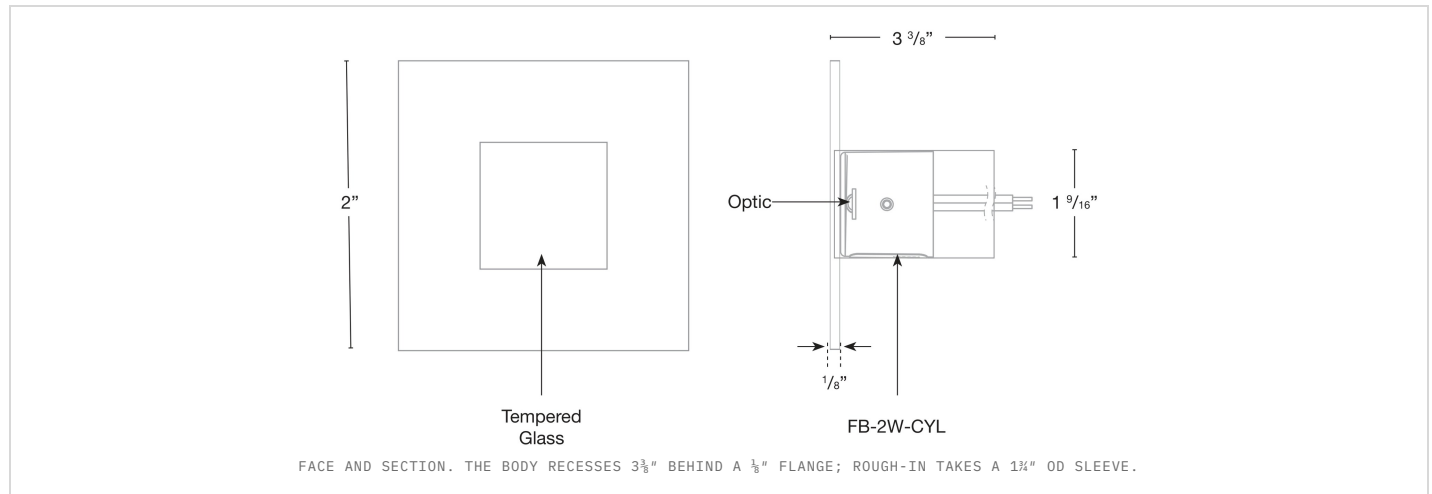

## MOUNTING

### Concrete Pour Sleeve

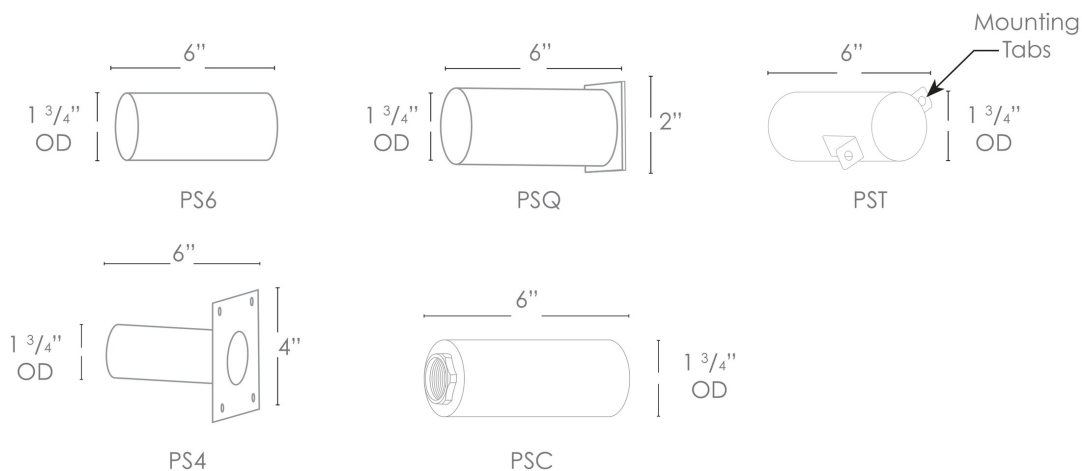

Recessed mounting — 1 3/4" OD rough-in. Concrete pour sleeves are optional, ordered in the Options column.