Eino

Recessed Step Light

A compact 2″ square recessed step light in solid brass for walls, risers, and hardscape applications. Features a machined face with tempered-glass aperture and is available in 2W, 3W, or 6W outputs. Four beam angles from a 19° spot to a 120° wide flood.

- Solid brass body — 2″ square face, ⅛″ flange, 3⅜″ behind the wall
- Four beam angles — 19° spot · 38° flood · 54° wide flood · 120° wide angle flood
- Three outputs — 2W / 3W / 6W at 200 / 300 / 400 lm
- Seven colors — 2200K · 2700K · 3000K · 4000K · 5000K · 6500K · RGBW
- Clear or frosted tempered glass over the FB-2W-CYL optical engine
- Fourteen finishes — nine brass and patina, five PVD Premium



cULus | Wet Location | Made in USA

LUMEN OUTPUT	200 / 300 / 400 lm (by wattage)
COLOR TEMP / CCT	2200K / 2700K / 3000K / 4000K / 5000K / 6500K · RGBW
BEAM ANGLE	19° spot · 38° flood · 54° wide flood · 120° wide angle flood
WATTAGE	2W / 3W / 6W
VOLTAGE	120V AC or 8–15V DC

FINISH	Matte Bronze, Verde, Moss, Black, Rusty, Satin Brass, Aged Brass, Raw Copper, Natural Copper
MATERIAL	Solid brass
LENS	Tempered glass — clear or frosted
MOUNTING	Recessed — 1¾″ OD rough-in or concrete pour sleeve

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	LENS	OPTIONS	FINISH
EINO	2 2W 3 3W 6 6W	AC120 120V AC LVDC 8–15V DC	22 2200K 27 2700K 30 3000K 40 4000K 50 5000K 65 6500K RGBW	19 19° spot 38 38° flood 54 54° wide flood 120 120° wide angle flood	CA Clear FA Frosted	N None PS6 Pour sleeve PSQ Pour sleeve, flanged PS4 Pour sleeve, plate PST Pour sleeve, tabs PSC Pour sleeve, threaded	MBZ VD MO BK RU SB AGB RC NC PVDP PVDS PVDG PVDZ PVDK

Build Your Order Code — example values shown in grey

MODEL		WATTAGE		VOLTAGE		CCT		BEAM		LENS		OPTIONS		FINISH
	–		–		–		–		–		–		–	
EINO		2		AC120		27		120		CA		PS6		PVDS

STANDARD FINISHES



MBZ
Matte Bronze




VD
Verde



MO
Moss



BK
Black



RU
Rusty



SB
Satin Brass



AGB
Aged Brass

RC
Raw Copper



NC
Natural Copper

PVD PREMIUM FINISHES



PVDP
PVD Polished



PVDS
PVD Satin



PVDG
PVD Graphite




PVDZ
PVD Bronze



PVDK
PVD Black


DIMENSIONS

MODEL	FACE (W × H)	DEPTH BEHIND FACE	BODY HEIGHT	FLANGE
EINO	2″ × 2″ (51 × 51 mm)	3 3/8″ (86 mm)	1 9/16″ (40 mm)	1/8″ (3 mm)

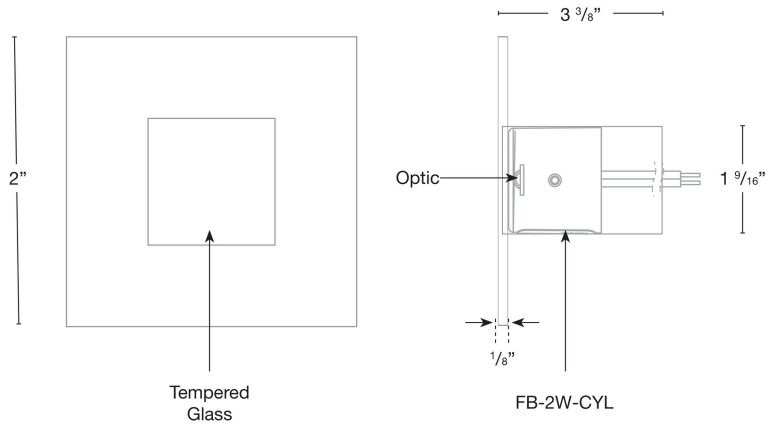

FACE AND SECTION. THE BODY RECESSES 3⅜″ BEHIND A ⅛″ FLANGE; ROUGH-IN TAKES A 1¾″ OD SLEEVE.

MOUNTING

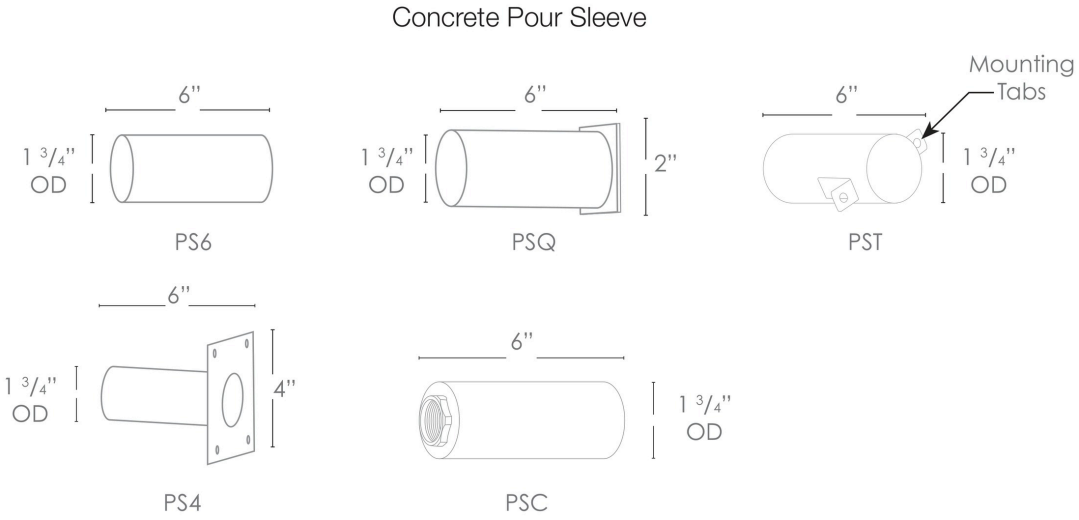

Recessed mounting — 1¾″ OD rough-in. Concrete pour sleeves are optional, ordered in the Options column.