

Series		LED ACOUSTIC LIGHT SERIES		Model	CIP-LL0401SAC		
				Project:			
				Type:			
				Notes:			
				Overview			
				<p>Combining the elements of color, shape, and sound, this acoustic family is an extremely versatile lighting tool for a range of projects. Adopt 0.47"(12mm) ployster fiber in a range of color options. With great acoustic performance, has sound absorbing, non-toxic, non-allergic and non-irritant characteristics. E26 base tube in side. And for simple design with Polyster fiber, easy to disassemble and install.</p>			
Certificate		Features					
		<ol style="list-style-type: none"> E26 base for tube installation; Advise max power not exceed 40W Permanent flame retardant ASTM E84 Class A The material meet the requirement of EN717-1:2004 standards which are free of formaldehyde and environment friendly Operation Voltage: AC120-277V, non-dimmable 38 acoustic felt colors for optional Efficiency: \cong 70lm/w NRC reach more than 0.8 base on 7.87"(200mm) air gap 					
Type	Suspended			Size			
				Model type	D	H	Dimension code
				LL0401SAC	35.3"(896mm)	19.5"(496mm)	L35H20
Ordering Format	Model No.	Installation		Acoustic Configuration		Dimension code	Acoustic Color
	CIP- LL0401	S	Suspended	AC	Acoustic with light	D35H20	Acoustic Color Code


Acoustic Color Code




Order Example:

CIP-LL0401SAC-D35H20-NSAC-001 141

Light distribution

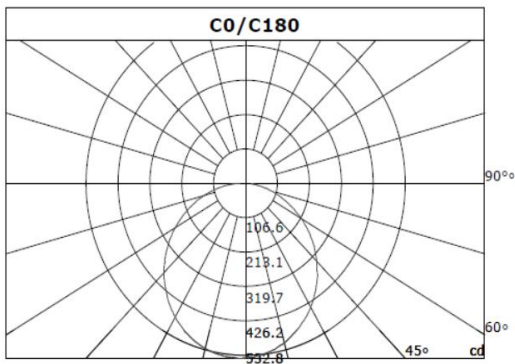

Optical system

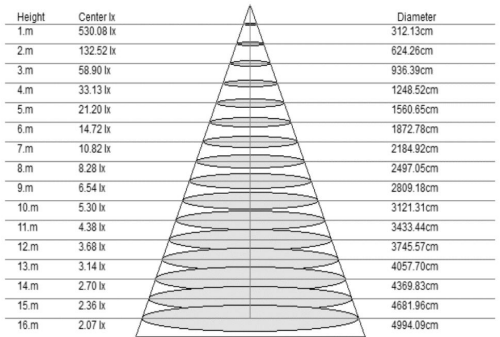

Material

Acoustic Shade

0.47"(12mm) Polyester fiber

We reserve the right to make any design changes for continuous improvement without notification, contact us for the latest technical information!

File name

NS/SS-LL0401SAC-REV2.0