


LED Selectable Strip Linear Light



Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W

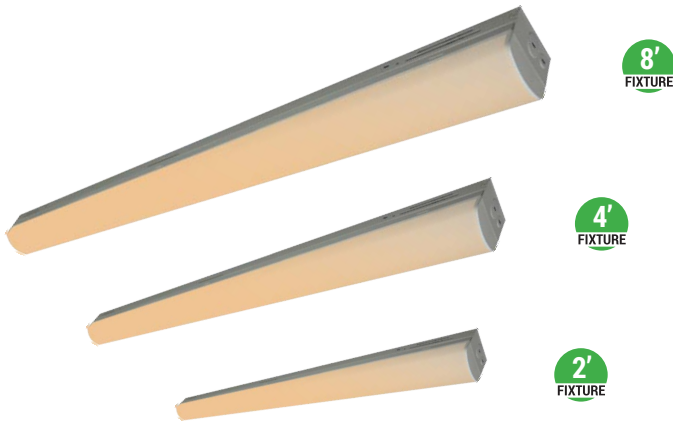

The Selectable Strip Linear Light can be widely used for indoor (damp locations) Excellent for hospitals,schools,shops,restaurants,storage rooms, supermarkets, etc.



FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

WATT/CCT FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation



Buckle design, Convenient disassembly and assembly

SPECIFICATION			
TYPE	CIP-ST2FT152025W27-3545K	CIP-ST4FT253040W27-3545K	CIP-ST8FT556065W27-3545K
WATTAGE	(2FT) 15W/20W/25W	(4FT) 25W/30W/40W	(8FT) 55W/60W/65W
LUMEN	2285 lm/3077lm/3719lm	3806 lm/4653lm/6100lm	8595 lm/9190 lm/9677 lm
EFFICACY	≥130 lm/W		
CCT	3500K/4000K/5000K		
DEFAULT SETTING	25W&4000K	40W&4000K	65W&4000K
CRI	80		
INPUT VOLTAGE	AC120-277V		
LIGHT ANGLE	112°		
POWER FACTOR	0.90		
DRIVER EFFICACY	86%		
DIMMING	0-10V Dimming		
WORKING TEMPERATURE	-4°F ~ 122°F		
LIFESPAN (L70)	100,000 hours		
PROTECTION LEVEL	Damp locations		
CABLE	NO CABLE		
WARRANTY	5 year limited		



(803) 766-0243 | info@ciplighting.com

572 John Ross Pkwy, Ste 107, PMB 29, Rock Hill, SC 29730


LED Selectable Strip Linear Light



Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W

DIMENSION

Unit:mm/inch

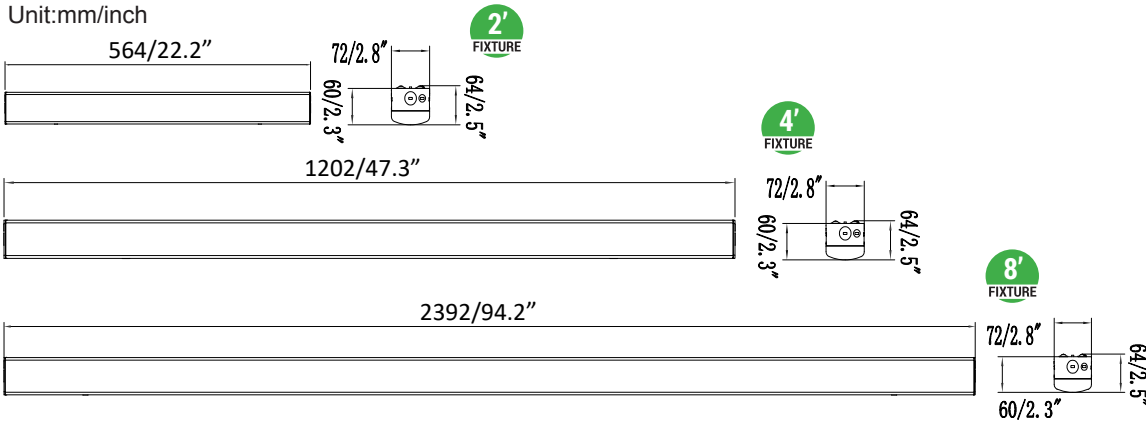

WATTAGE	15W/20W/25W
GR. WEIGHT	2.65 lbs (6 pcs/carton)
BOX DIM.	25.63" x 9.84" x 5.98"

WATTAGE	25W/30W/40W
GR. WEIGHT	4.41 lbs (6 pcs/carton)
BOX DIM.	50.59" x 9.84" x 5.98"

WATTAGE	55W/60W/65W
GR. WEIGHT	8.49 lbs (4 pcs/carton)
BOX DIM.	98.03" x 6.89" x 5.91"

EMERGENCY BACK-UP (SOLD SEPARATELY)



EMS8W27-XX
8W Emergency Backup Battery LED Driver

EMS15W27-XX
15W Emergency Backup Battery LED Driver

EMS20W27-XX
20W Emergency Backup Battery LED Driver

CONTROL (SOLD SEPARATELY)



ANT-3C
Microwave Motion Sensor




RC-100
Microwave Sensor Remote Controller

STANDARD ACCESSORIES(standard)



1.2M CABLE
(2FT,4FT,8FT)



J-BOX COVER
(2FT,4FT,8FT)



V-HOOK
(2FT,4FT,8FT)


STANDARD ACCESSORIES(SOLD SEPARATELY)



ST-SMA
Surface Mount Accessories for Strip lights
(2FT,4FT,8FT)



ST-CROSS PIECE
Strip Light Connection Piece
(2FT,4FT,8FT)



WIRE GUARD
(2FT,4FT,8FT)

ORDERING INFORMATION

EXAMPLE: We do try to keep the highlighted in US stock

CIP-ST2FT152025W27-3545K-E[Blank,M] / CIP-ST4FT253040W27-3545K-E[Blank,M] / CIP-ST8FT556065W27-3545K-E[Blank,M]

CIP	ST	2FT	152025	27	3545K	E
PRODUCT	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT	CONTROL
CIP - CIP Lighting	ST (Strip Linear Light)	2FT (2-foot) 4FT (4-foot) 8FT (8-foot)	152025W - (15W/20W/25W) 253040W - (25W/30W/40W) 556065W - (55W/60W/65W)	27 - (120-277V)	3545K - (3500K/4000K/5000K)	M(Motion Sensor)



(803) 766-0243 | info@ciplighting.com

572 John Ross Pkwy, Ste 107, PMB 29, Rock Hill, SC 29730

LED Selectable Strip Linear Light




Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.


CIP-ST4FT253040W27-3545K (40W&3500K)

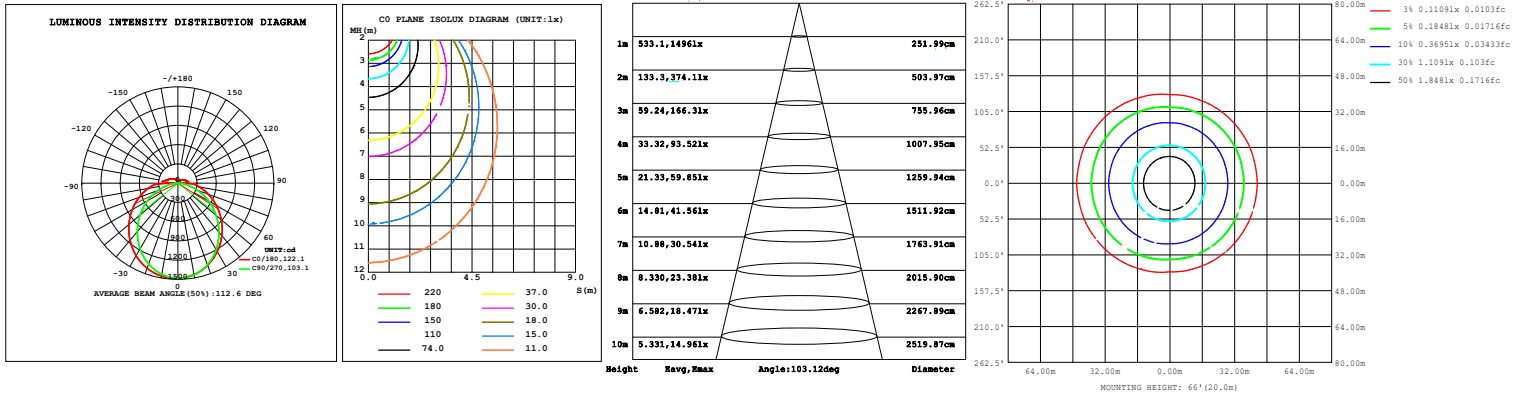

CIP-ST4FT253040W27-3545K (40W&4000K)

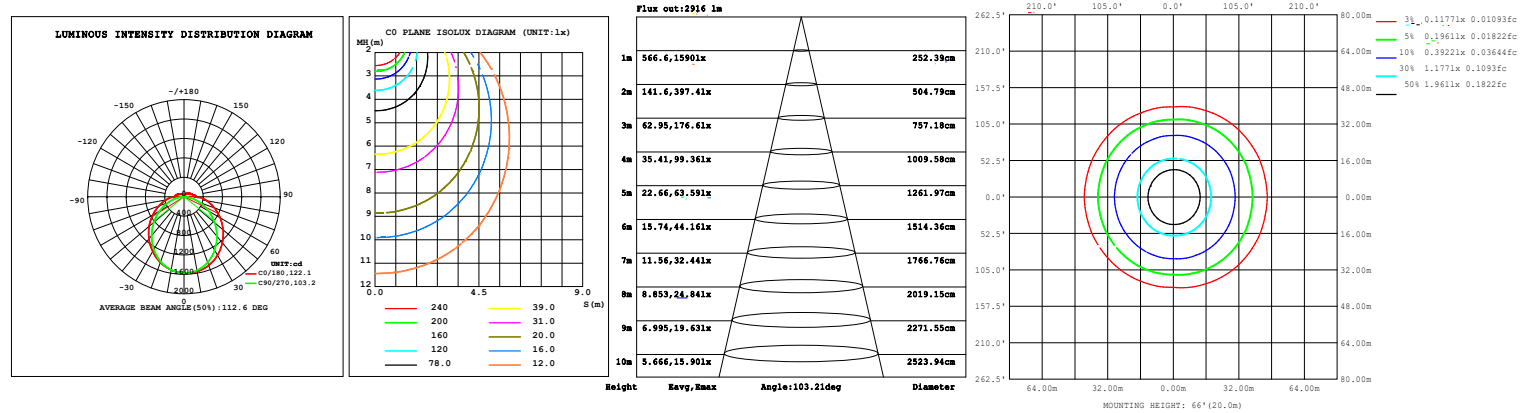

CIP-ST4FT253040W27-3545K (40W&5000K)

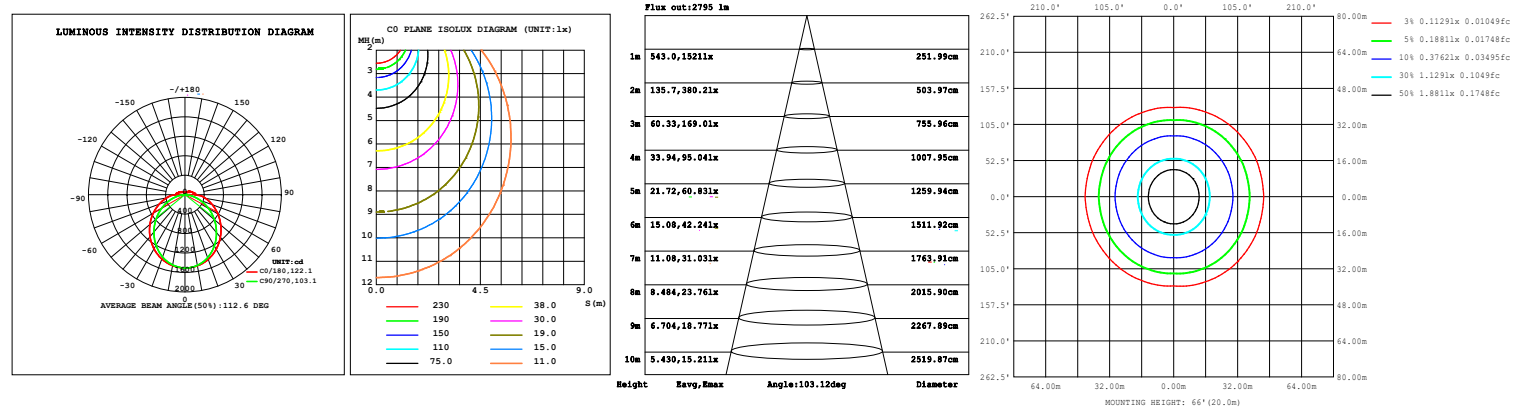

(803) 766-0243 | info@ciplighting.com

572 John Ross Pkwy, Ste 107, PMB 29,
Rock Hill, SC 29730

LED Selectable Strip Linear Light




Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.


CIP-ST8FT556065W27-3545K (65W&3500K)

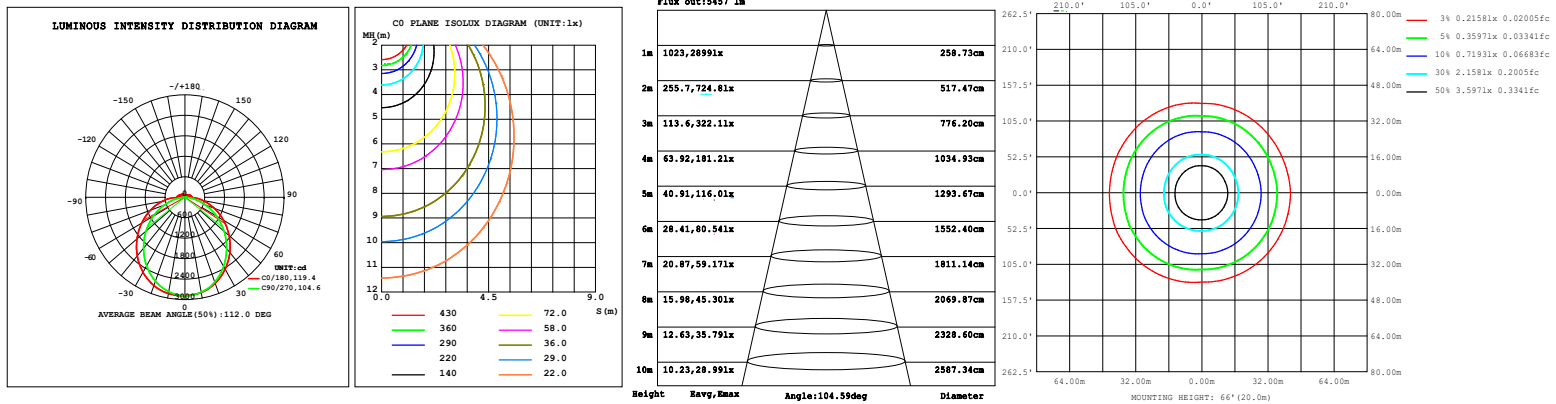

CIP-ST8FT556065W27-3545K (65W&4000K)

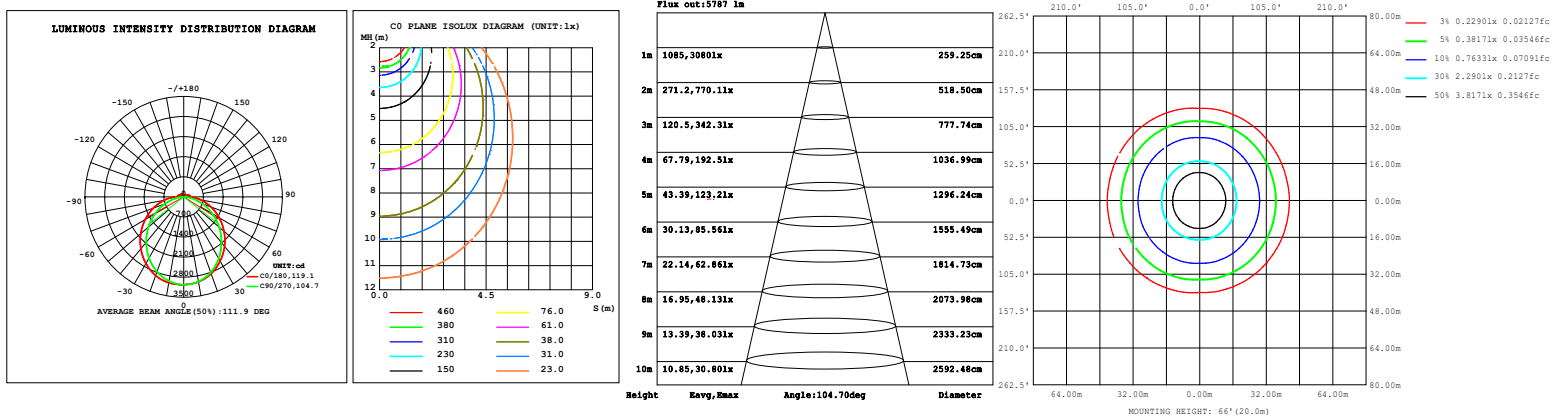

CIP-ST8FT556065W27-3545K (65W&5000K)

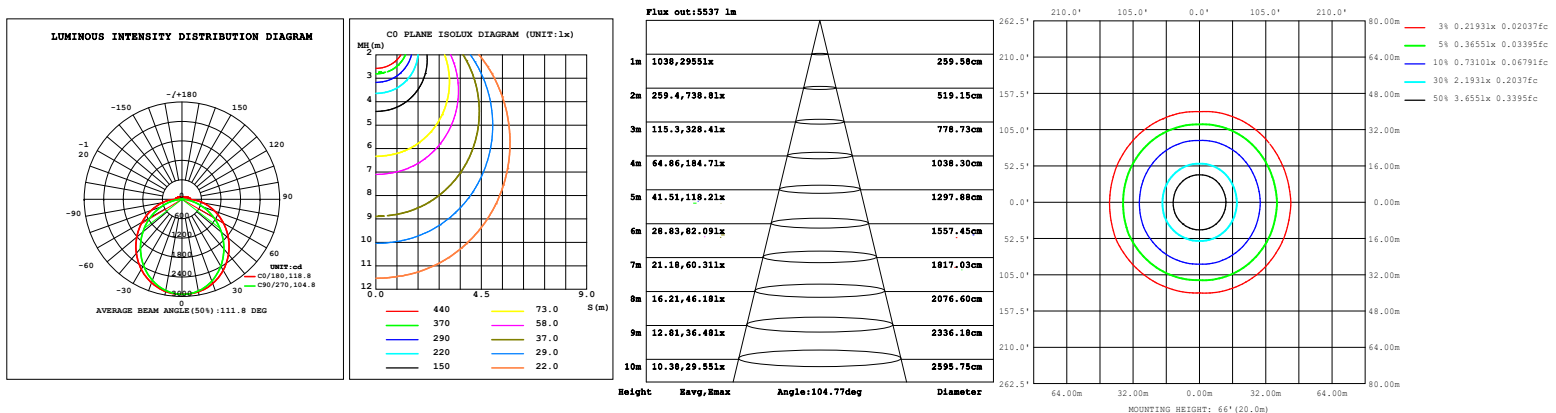

(803) 766-0243 | info@ciplighting.com

572 John Ross Pkwy, Ste 107, PMB 29, Rock Hill, SC 29730