




**FEATURES:**

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

**OPTIONS:**

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

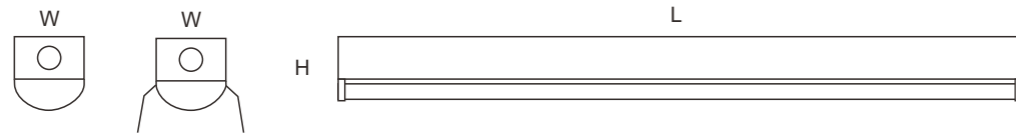

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-HYPC	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
CIP-LED220-HYPC	40W	1187x71x83 / 1187x128x112	120-347V	4000K				
CIP-LED230-HYPC	60W	1501x71x83 / 1501x128x112	220-240V	5000K 6500K	CRI>90	140Lm/W		




**FEATURES:**

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

**OPTIONS:**

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

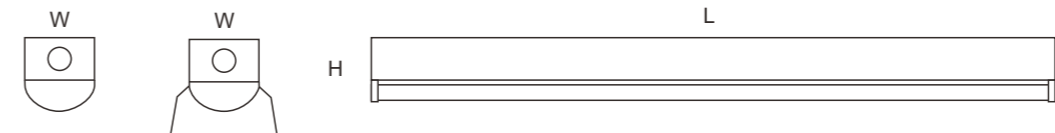

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
CIP-LED210-HYPC(S)	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
CIP-LED220-HYPC(S)	40W	1187x71x83 / 1187x128x112	120-347V	4000K				
CIP-LED230-HYPC(S)	60W	1501x71x83 / 1501x128x112	220-240V	5000K 6500K	CRI>90	140Lm/W		