

ARMIN

Bullet Flood Light

A die-cast aluminum bullet flood for landscape, façade, flag pole and accent lighting. Available in three output levels and three beam angles, with a locking swivel arm and 1/2" NPT threaded mount for flexible aiming. IP65 rated for indoor and outdoor use.

- Three output classes — 12W / 30W / 40W
- Three beam angles — 22° narrow, 35° medium, 57° wide
- 100–277V universal voltage
- Excellent thermal management for a long life
- IP65 rated for both outdoor and indoor use
- ½" NPT threaded arm with locking swivel
- Optional 0–10V dimming
- Bronze standard; black and white available
- 50,000-hour average lifespan
- 5-Year Limited warranty



UL

cUL

DLC Premium

IP65



LUMEN OUTPUT	1,450 – 4,800 lm
--------------	------------------

EFFICACY	120 – 135 lm/W
----------	----------------

COLOR TEMP / CCT	3000K · 4000K · 5000K
------------------	-----------------------

CRI	Ra 70
-----	-------

BEAM ANGLE	22° · 35° · 57°
------------	-----------------

LED SOURCE	Seoul
------------	-------

WATTAGE	12W · 30W · 40W
---------	-----------------

VOLTAGE	100–277V AC, 50/60Hz
---------	----------------------

DIMMING	0–10V (optional)
---------	------------------

DRIVER	Isolated LED driver
--------	---------------------

OPERATING TEMP	–22°F to +104°F
----------------	-----------------

IP / IMPACT	IP65
-------------	------

MATERIAL	Die-cast aluminum
----------	-------------------

MOUNTING	½" NPT threaded arm with locking swivel
----------	---

DIMENSIONS	Ø3.45–4.66" × 5.38–6.25" H × 5.02–6.91" D (by output class)
------------	---

LIFETIME	50,000 hrs
----------	------------

WARRANTY	5-Year Limited
----------	----------------

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	WATTAGE	VOLTAGE	CCT	BEAM	DIMMING	FINISH
ARMIN	12 12W 30 30W 40 40W	U 100-277V	30 3000K 40 4000K 50 5000K	22 22° 35 35° 57 57°	N None DV 0-10V dimming	BZ Bronze (standard) BK Black WH White

Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	DIMMING	FINISH
ARMIN	30	U	40	35	N	BZ

DIMENSIONS

MODEL	WIDTH (Ø)	HEIGHT	DEPTH
ARMIN-12	3.45" (87.6 mm)	5.38" (136.7 mm)	5.02" (127.5 mm)
ARMIN-30/40	4.66" (118.4 mm)	6.25" (158.8 mm)	6.91" (175.5 mm)

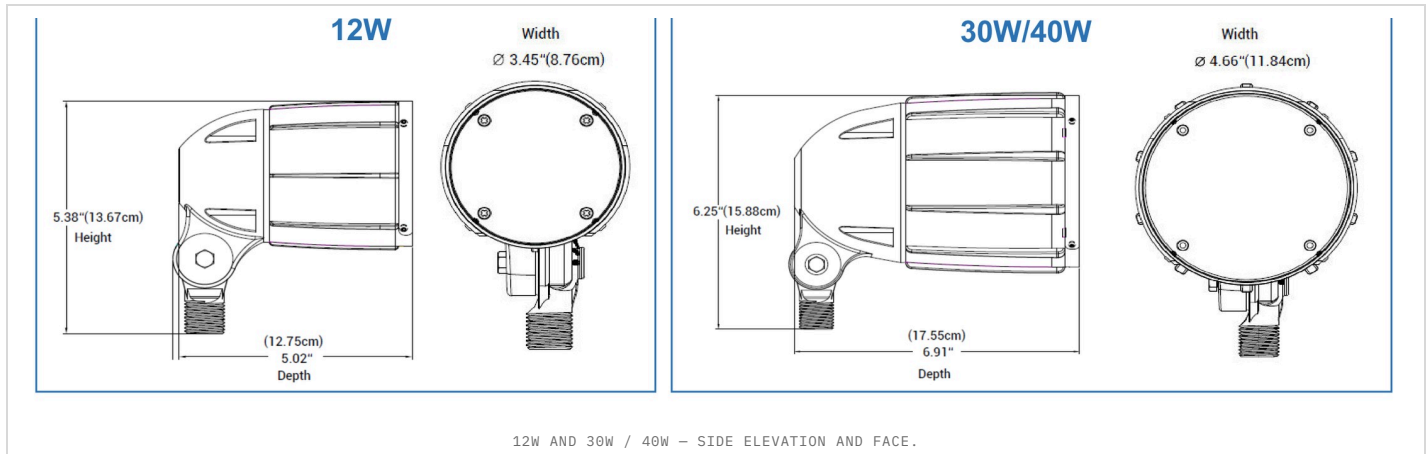

PERFORMANCE DATA

OUTPUT BY MODEL

POWER	LUMEN RANGE	EFFICACY RANGE
12W	1,450 – 1,480 lm	123 – 125 lm/W
30W	3,600 – 3,870 lm	130 – 135 lm/W
40W	4,600 – 4,800 lm	120 – 126 lm/W

LM79 / LM80 / IES test reports available. Lumen and efficacy vary with CCT.

Beam Angle 22° · 35° · 57° **Efficacy** 120 – 135 lm/W **IES File** On request