

INTRODUCTION

FEATURE

- Durable Optimized LED Lighting
- Long Lifespan >50,000hours
- Working Temperature: -30℃~50℃

MAIN MATERIAL

- LED Brand: GUBO
- Driver Brand: GUBO
- Housing: Aluminum Profile
- Diffuser: Antiglare Opal PC Diffuser

INSTALLATION

- [FFS] Surface Mounted: Ceiling, Wall, Pillar-top
- [FJP]: Mounting on Outlet Box (TP7126/Custom)
- Suitable for Architecture Illumination, Like Balcony, Veranda, External Wall...

STANDARD

- Designed and Manufactured to Comply with TUV/CB/CE/RoHS/SAA/Erp/cETL/FCC
- IP65 Protection, Class I Electrical


CUSTOM OPTION

- LED CCT: 1,800K~10,000K/R/G/B/Y
- [CRI]: [E] RA80, [G] RA90, [H] RA97
- [SFH]: Custom Housing Finish Colors by RAL Code

WHITE	BLACK	DARK GREY	GREY	PEARL GREY
RAL9010P	RAL9005P	RAL7016P	RAL7043P	RAL9022P
				

GTG1601G: LED BULKHEAD LIGHT

							
100-277V	WARRANTY	RGBW	150°	IP65	IK08	EURO	USA.CA
(MR350A)	(MR350A)	(MR200A)	(MR200A)	(MR200A)	(MR200A)	(MR200A)	(MR200A)
[BMP02]-[L600]	[BMP01]-[L600]	[L1200]	[L600]	[L600]	[L1200]	[L600]	[L600]

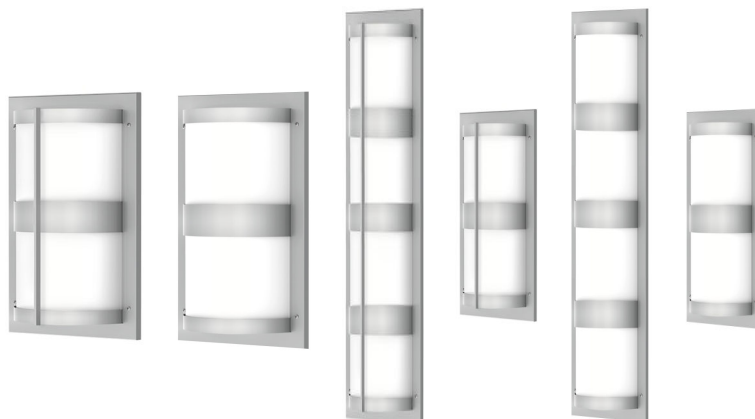

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT [V]				
GTG1601G-MR200A-BMP01-L600 BMP02-L600	30W [40W] [20W]	156x0.5W SMD2835	H2700K	RA97	1810	>0.9	150°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	AC100~277V [AC100~240V] [AC100~347V] 50/60Hz				
			H3000K	RA97	1910								
			H3500K	RA97	1910								
			H4000K	RA97	2950								
			H5000K	RA97	2950								
	H6000K	RA97	2880										
	2C@30W	TWH	H2700K	H6000K	RA97	1810				>0.9			
3C@30W	RGB	620nm	520nm	460nm	\	1810				>0.9			
4C@30W	RGBW	620nm	520nm	460nm	H2700K	\				1810	>0.9		
5C@30W	RGBTW	620nm	520nm	460nm	2700K	6000K				\	1810	>0.9	
GTG1601G-MR200A-BMP01-L1200 BMP02-L1200	60W [80W] [40W]	312x0.5W SMD2835	H2700K	RA97	3870	>0.9		150°		[CSL]: Photocell Lux Sensor [CSM]: Micro Motion Sensor [CSMD]: Bi-level Microwave Motion Sensor	[CV DC12V] [CV DC24V] [CV DC42V]		
			H3000K	RA97	4100								
			H3500K	RA97	4100								
			H4000K	RA97	4420								
			H5000K	RA97	4420								
	H6000K	RA97	4320										
	2C@60W	TWH	H2700K	H6000K	RA97	3870						>0.9	
3C@60W	RGB	620nm	520nm	460nm	\	3870						>0.9	
4C@60W	RGBW	620nm	520nm	460nm	H2700K	\						3870	>0.9
5C@60W	RGBTW	620nm	520nm	460nm	2700K	6000K						\	3870
GTG1601G-MR350A-BMP01-L600 BMP02-L600	40W [60W] [30W] [20W]	312x0.5W SMD2835	H2700K	RA97	2750	>0.9				150°		[CBE]: Emergency [CBESMD]:EM+Sensor	[CV DC12V] [CV DC24V] [CV DC42V]
			H3000K	RA97	2910								
			H3500K	RA97	2910								
			H4000K	RA97	3150								
			H5000K	RA97	3150								
	H6000K	RA97	3070										
	2C@40W	TWH	H2700K	H6000K	RA97	2750							
3C@40W	RGB	620nm	520nm	460nm	\	2750							
4C@40W	RGBW	620nm	520nm	460nm	H2700K	\	2750		>0.9				
5C@40W	RGBTW	620nm	520nm	460nm	2700K	6000K	\		2750				
GTG1601G-MR350A-BMP01-L1200 BMP02-L1200	80W [120W] [60W] [40W]	624x0.5W SMD2835	H2700K	RA97	5500	>0.9	150°		[CBE]: Emergency [CBESMD]:EM+Sensor			[CV DC12V] [CV DC24V] [CV DC42V]	
			H3000K	RA97	5820								
			H3500K	RA97	5820								
			H4000K	RA97	6300								
			H5000K	RA97	6300								
	H6000K	RA97	6140										
	2C@80W	TWH	H2700K	H6000K	RA97	5500							
3C@80W	RGB	620nm	520nm	460nm	\	5500							
4C@80W	RGBW	620nm	520nm	460nm	H2700K	\		5500			>0.9		
5C@80W	RGBTW	620nm	520nm	460nm	2700K	6000K		\			5500		

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.


(MR200A)-[FFS] Flush Surface Mounted Light

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

MR200A-BMP01
[L600]


DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP-TP7126]

CASE STUDY:

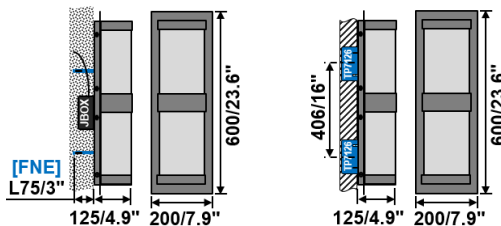


MR200A-BMP01
[L1200]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP2A-TP7126]

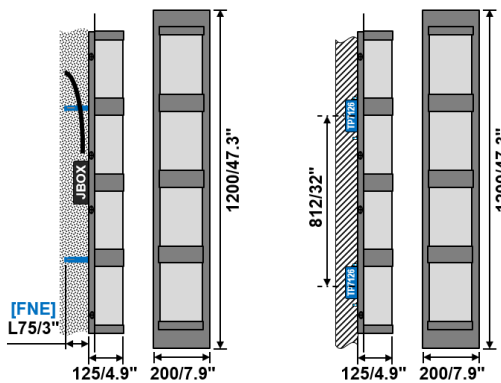



MR200A-BMP02
[L600]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP-TP7126]

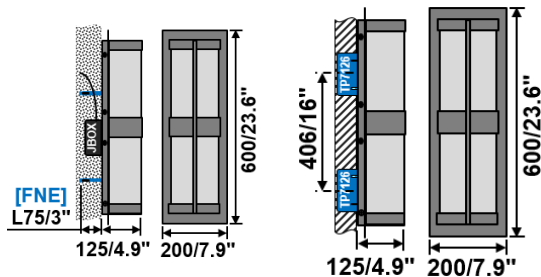

MR200A-BMP02
[L1200]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP2A-TP7126]

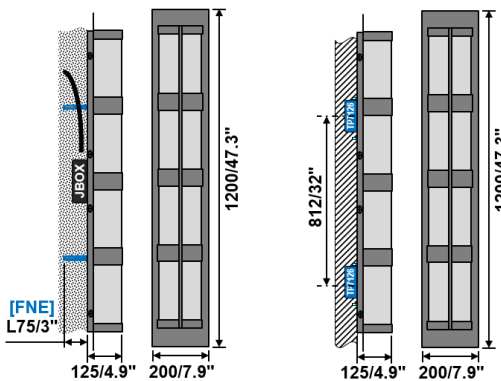


(MR350A)-[FFS] Flush Surface Mounted Light

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

MR350A-BMP01
[L600]


DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP-TP7126]

CASE STUDY:

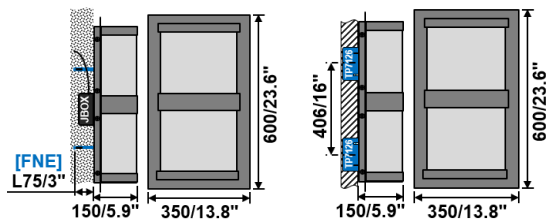



MR350A-BMP01
[L1200]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP2A-TP7126]

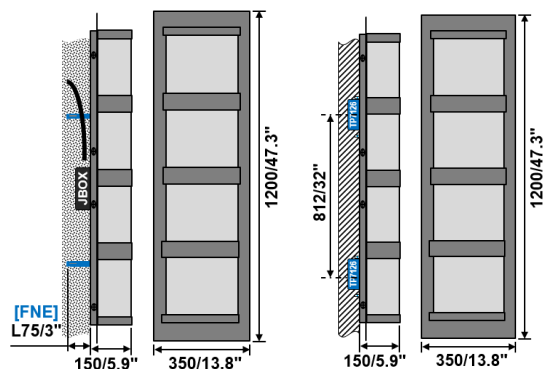

MR350A-BMP02
[L600]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP-TP7126]

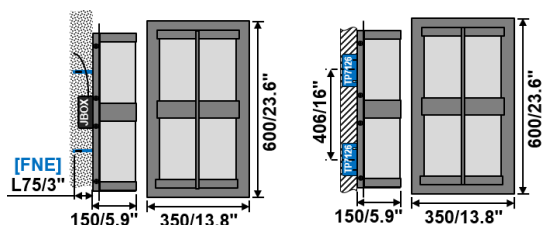

MR350A-BMP02
[L1200]

DIMENSION: [UNIT: MM]
[FFS]-[FNE-L75] [FFS]-[FJP2A-TP7126]

