



GTG4101C: WALL RECESSED LED STEP LIGHT

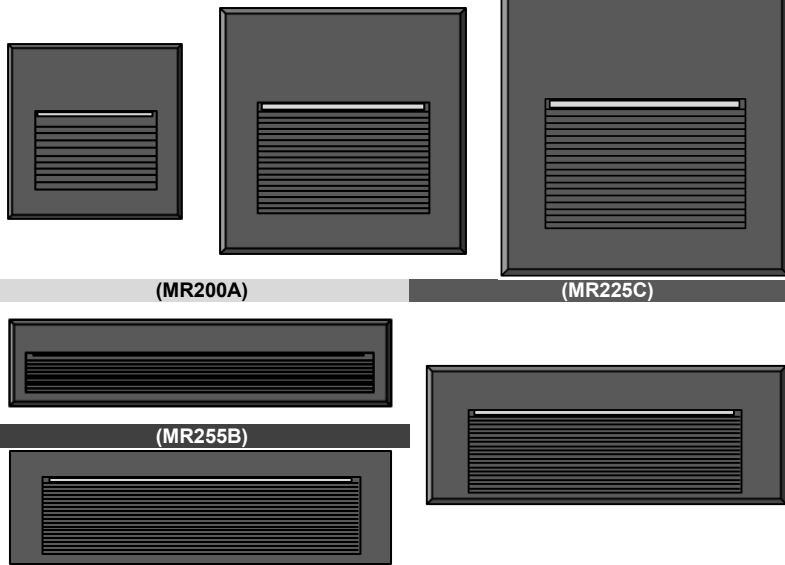

CASE STUDY:

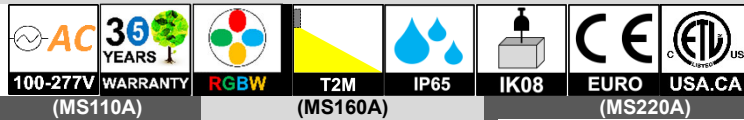

INTRODUCTION

FEATURE

Anti-glare Soft Lighting for Walking Path
Customized Options to Make Comfort Lighting
The Uniform Quality by Skilled Production
Easy Installation and Maintenance Freely
Long Lifespan >50,000hours

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens
Fittings: Corrosion-resistant Plastic Sleeve
Power Cable: Pre-wired Length 15cm

INSTALLATION

Wall Recessed Mounted
Notes: Sleeve need to be Pre-embedded.
Suitable for Staircase, Path.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/ETL/FCC/SAA
IP65 Protection, Class I Electric

CUSTOM OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
[CRI]: [E] RA80, [G] RA90, [H] RA97

- Detection Angle: 120°
- Detection Distance: Maxi. 3meters
- Time Delay: 30seconds

[SFT]: Custom Trim Finish Colors by RAL Code

WHITE	BLACK	DARK GREY	GREY	PEARL GREY
RAL9010P	RAL9005P	RAL7043P	RAL7042P	RAL9022P

MODEL	POWER 【W】	LED TYPE	CCT 【K】		CRI	FLUX 【LM】	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT 【V】	
GTG4101C- MR110A MR145A	3W	6x2W SMD3030	G2700K		RA90	130	>0.9	T2M:65x135°	[+CDP]:PWM(1%) [CDT]:TRIAC(15%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%)	AC100~277V [AC220~240V] [AC110~130V] 50/60Hz [+CV DC12V] [+CV DC24V] [+CV DC42V]	
			G3000K		RA90	140					
			G3500K		RA90	140					
			G4000K		RA90	150					
			G5000K		RA90	150					
	G5700K		RA90	150							
GTG4101C- MS110A MR200A MR145B MR170B MR100C	2C@3W	TWG	G2700K	G6500K	RA90	130	>0.4				
	4C@3W	RGBW	620nm	520nm	455nm	G2700K	\		130		>0.4
	6W [3W]	6x2W SMD3030	G2700K		RA90	260	>0.9				
			G3000K		RA90	280					
			G3500K		RA90	280					
			G4000K		RA90	300					
G5000K			RA90	300							
G5700K		RA90	300								
2C@6W	TWG	G2700K	G6500K	RA90	260	>0.6					
4C@6W	RGBW	620nm	520nm	455nm	G2700K	\	260		>0.7		
GTG4101C- MS160A MR225B MR160C	10W [6W]	12x2W SMD3030	G2700K		RA90	440	>0.9				
			G3000K		RA90	470					
			G3500K		RA90	470					
			G4000K		RA90	510					
			G5000K		RA90	510					
	G5700K		RA90	510							
2C@6W	TWG	G2700K	G6500K	RA90	440	>0.6					
4C@6W	RGBW	620nm	520nm	455nm	G2700K	\	440		>0.7		
GTG4101C- MS220A MR255B MR280B MR225C MR250C	15W [10W] [20W]	18x2W SMD3030	G2700K		RA90	620	>0.9				
			G3000K		RA90	670					
			G3500K		RA90	670					
			G4000K		RA90	710					
			G5000K		RA90	710					
	G5700K		RA90	710							
2C@15W	TWG	G2700K	G6500K	RA90	620	>0.6					
4C@15W	RGBW	620nm	520nm	455nm	G2700K	\	620		>0.7		

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

SPECIFICATION

GTG4101C: WALL RECESSED LED STEP LIGHT

(MS110A)  58/2.3" S110/4.33" [CUTOUT] W104*H104*D55MM	(MS160A)  62/2.44" S160/6.3" [CUTOUT] W148*H148*D60MM
(MS220A)  62/2.44" S220/8.66" [CUTOUT] W202*H202*D60MM	(MR110A)  54/2.13" 110/4.33" 45/1.77" [CUTOUT] W105*H40*D54MM
(MR145A)  45/1.77" 145/5.71" 45/1.77" [CUTOUT] W140*H40*D45MM	(MR200A)  45/1.77" 200/7.9" 45/1.77" [CUTOUT] W195*H40*D45MM
(MR145B)  55/2.17" 145/5.71" 70/2.76" [CUTOUT] W140*H60*D55MM	(MR170B)  50/1.97" 170/6.7" 70/2.76" [CUTOUT] W162*H60*D50MM
(MR255B)  58/2.28" 255/10" 75/2.95" [CUTOUT] W250*H70*D58MM	(MR280B)  58/2.28" 280/11" 75/2.95" [CUTOUT] W250*H70*D58MM
(MR100C-CSPL)  56/2.2" 100/3.94" 160/6.3" [CUTOUT] W95*H153*D56MM	(MR160C-CSPL)  56/2.2" 160/6.3" 100/3.94" [CUTOUT] W153*H95*D56MM
(MR225C)  58/2.28" 225/8.86" 125/4.92" [CUTOUT] W207*H112*D58MM	(MR250C)  58/2.28" 250/9.84" 95/3.74" [CUTOUT] W240*H85*D58MM