

(803) 766-0243 | info@ciplighting.com

200LMS/W Available from 100W TO 600W

HB100W/150W/200W/250W/300W/ 400W/500W/600W




LED LINEAR LIGHT

ULTRA-HIGH QUALITY, FIRST-CLASS SERVICE COST-EFFECTIVE LED LINEAR LAMP

K7 LED Linear High Bay Light

(803) 766-0243 | info@ciplighting.com



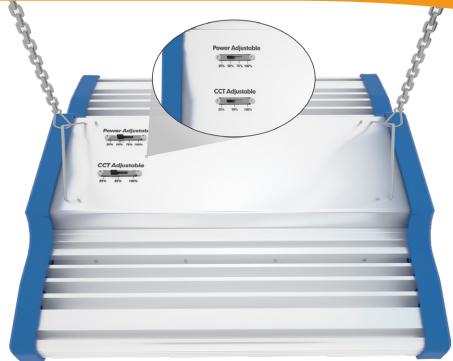

Features

-200LM/W

-100W/150W/200W/250W/300W/400W/500W/600W

-120° beam angle (milky white PC lens or clear PC lens optional)

-AC100-277V/347V480V Voltage

-3000K-6500K CCT (4000 & 6000K optional)

-Intelligent control: infrared remote control, Zigbee, Bluetooth Mesh, high-altitude microwave sensor, infrared light sensor, Zigbee version supports heat map, supports light decay compensation

-Multiple Mounting Options: Suspended mounted/Fixed ceiling mounted/Boom mounted

-UL / DLC/CB/SAA/VEET

-Reduce overall number of SKUs to 2 or 3 while offering 4 wattage and 3 CCT choices

-Streamline ordering and inventory, making it flexible enough for distributor stock and flow

Certifications



K7 LED Linear High Bay Light

(803) 766-0243 | info@ciplighting.com

LIGHTING

Intelligent control option

Multi-function switch remote control Mobile APP

Just replace the smart accessories and install Intelligent control freely: infrared remote control, Zigbee, Bluetooth Mesh, high-altitude microwave sensor, infrared light sensor, Zigbee version supports heat map, supports light decay compensation



K7 LED Linear High Bay Light

(803) 766-0243 | info@ciplighting.com





Product Parameters

Part Number	HB100W/150W/200W-K7	HB250W-300W/400W-K7	HB500W/600W-K7
Wattage	100W/150W/200W	250W/300W/400W	500W/600W
Lumen Output	20000lm/30000lm/40000lm	50000lm/60000lm/80000lm	100000lm/120000lm
LED Chip		Lumileds 3030	
Luminous Efficacy		200LM/W	
LED Quantity	224pcs/224pcs/448pcs	448pcs/448pcs/896pcs	1344pcs
ССТ		3000K-6500K	
CRI		≥80	
Beam Angle		120°	
IP Rating		IP22	
Working Temperature		-30°C to +55°C	
Input Voltage		AC100-277V/347V/480V,50/60HZ,>0.92	
Warranty		7 years	
Lifespan		>50,000hrs	
Material		Aluminum housing+PC leds	
Size(MM)	L300*W291*H56	L580*W291*H56	L860*W291*H56

Dimension

100W/150W/200W		
250W/300W/400W		(9: 00 Plane beam ogle (904) 00 Plane beam ongle (904) (123.)
	580mm	
500W/600W		
	860mm	

(803) 766-0243 | info@ciplighting.com



Multiple Mounting







Suspended mounted

Fixed ceiling mounted

Boom mounted

Application

Widely use in Factory, Workshop, Warehouse, Logistics Center, Exhibition Hall, Stadium, Gas Station, Supermarket and etc.

