

INTRODUCTION

FEATURE

Optimized Professional Architecture Lighting
 Modular Structure For Various Installation Location
 Long Lifespan Design > 50,000hours
 Working Temperature: -30℃~50℃

MAIN MATERIAL

LED Brand: GUBO
 Driver Brand: GUBO
 Housing: Die-casted Aluminum Radiator
 Optics: High Efficiency PC Lens
 Diffuser: Clear Tempered Glass Diffuser

INSTALLATION

Stake Mount or Surface Mounted
 Suitable for Exterior Illumination, Like
 Architecture.....

STANDARD


Designed and Manufactured to Comply with
 CE/RoHS/CB/cETL/SAA/SASO Standard
 IP67 Protection, Class III Electric

OPTIONS


LED CCT: 1,800K~10,000K/R/G/B/Y
 LED Grown Light: **Full Spectrum** 380nm~840nm
 [CRI]: [E] Ra80, [G] Ra90, [H] Ra97
 [FFG]: Ground Surface Mounted
 [FBS]: Ground Spike
 [F1] Custom Housing Finish: Colors by RAL Code

WHITE	BLACK	GREY	DARK GREY	BRASS
RAL9010P	RAL9005P	RAL7042P	RAL7016P	RAL1024P


GTE6602A: LED RING LIGHT

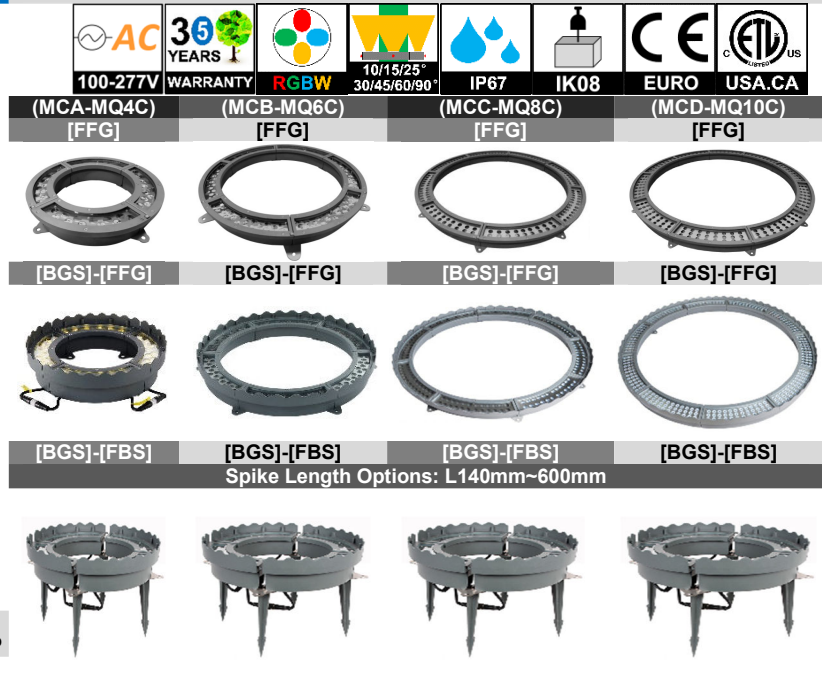

CASE STUDY:

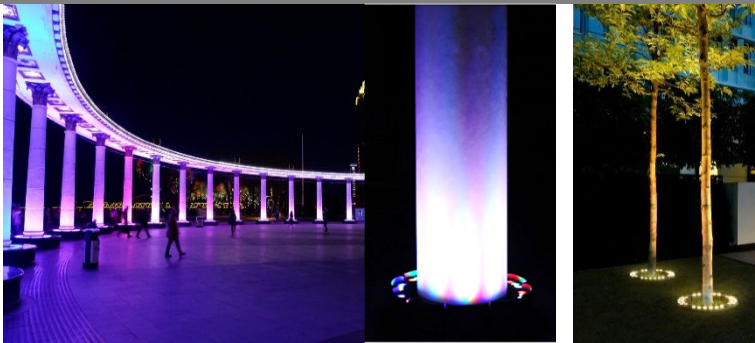

DIMENSION: [UNIT: MM]

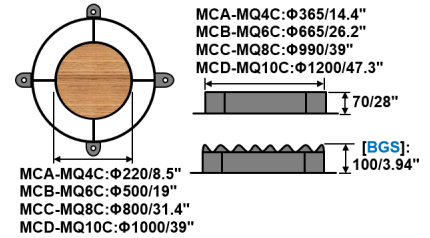

Custom Adding Modules to Extend the Ring Diameter.

Notes: Custom Installation and Accessories Referred to Another Specification Catalogue of Fixing Kits.

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	REMOTE DRIVER	INPUT [V]
GTE6602A-MCA2B-MQ4C	4x12W	4x12x2W SMD3030	G2700K	RA90	4x775	>0.9	[Symmetric] BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60° BL90D:90° BL120D:120°		
			G3000K	RA90	4x810				
			G3500K	RA90	4x810				
			G4000K	RA90	4x860				
			G6500K	RA90	4x860				
	4x2C@12W	TWG	G2700K G6500K	RA90	4x590	>0.9			
	4x3C@12W	RGB	620nm 520nm 460nm	\	4x590	>0.7			
4x4C@12W	RGBW	620nm 520nm 460nm G2700K	\	4x590	>0.5				
4x4C@12W	RGBA	620nm 520nm 460nm 590nm	\	4x590	>0.5				
GTE6602A-MCB2B-MQ6C	6x18W [6x12W]	6x18x2W SMD3030	G2700K	RA90	6x1160	>0.9	[Oval] BLV10x45° BLV10x65° BLV30x70°	[CDDT]: TRIAC(10%) [CDV]: 0~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDX]: DMX512(1%) [CDA]: DALI(1%) [CDP]: PWM(1%)	DC24V [DC12V] [DC42V] [DC48V]
			G3000K	RA90	6x1210				
			G3500K	RA90	6x1210				
			G4000K	RA90	6x1280				
			G6500K	RA90	6x1280				
	6x2C@18W	TWG	G2700K G6500K	RA90	6x880	>0.9			
	6x3C@18W	RGB	620nm 520nm 460nm	\	6x880	>0.7			
6x4C@18W	RGBW	620nm 520nm 460nm G2700K	\	6x880	>0.5				
6x4C@18W	RGBA	620nm 520nm 460nm 590nm	\	6x880	>0.5				
GTE6602A-MCC2B-MQ8C	8x24W [8x18W] [8x12W]	8x24x2W SMD3030	G2700K	RA90	8x1550	>0.9	[BGS] Shield		
			G3000K	RA90	8x1610				
			G3500K	RA90	8x1610				
			G4000K	RA90	8x1710				
			G6500K	RA90	8x1710				
	8x2C@24W	TWG	G2700K G6500K	RA90	8x1180	>0.9			
	8x3C@24W	RGB	620nm 520nm 460nm	\	8x1180	>0.7			
8x4C@24W	RGBW	620nm 520nm 460nm G2700K	\	8x1180	>0.5				
8x4C@24W	RGBA	620nm 520nm 460nm 590nm	\	8x1180	>0.5				
GTE6602A-MCD2B-MQ10C	10x36W [10x24W] [10x18W] [10x12W]	10x36x2W SMD3030	G2700K	RA90	10x2320	>0.9	[BDF] LM-20% BDF:120° [BGL] LM-20% Louver		
			G3000K	RA90	10x2420				
			G3500K	RA90	10x2420				
			G4000K	RA90	10x2560				
			G6500K	RA90	10x2560				
	10x2C@36W	TWG	G2700K G6500K	RA90	10x1760	>0.9			
	10x3C@36W	RGB	620nm 520nm 460nm	\	10x1760	>0.7			
10x4C@36W	RGBW	620nm 520nm 460nm G2700K	\	10x1760	>0.5				
10x4C@36W	RGBA	620nm 520nm 460nm 590nm	\	10x1760	>0.5				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
 Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.