
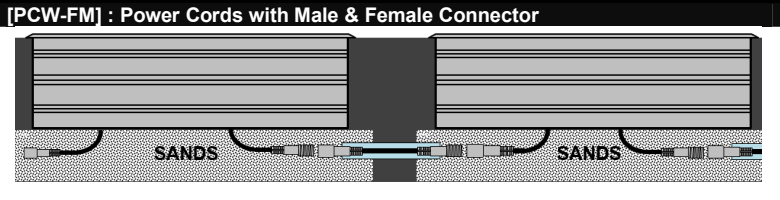
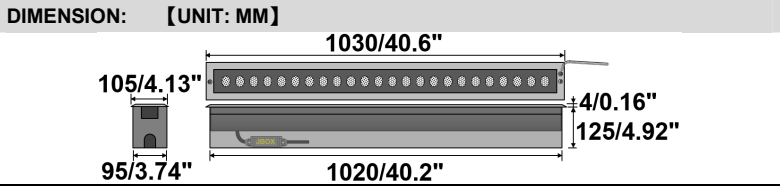
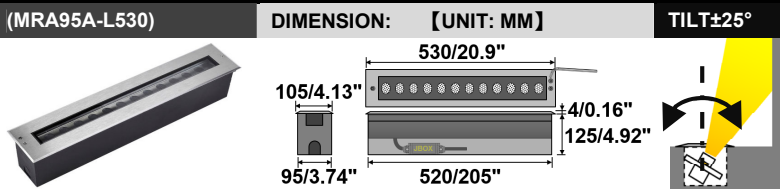
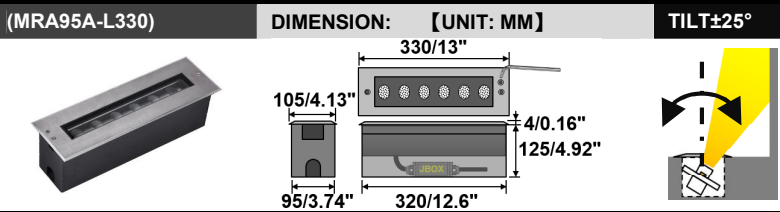


GTG8521A-MRA95A: TILTABLE LED LINEAR INGROUND LIGHT



INTRODUCTION

FEATURE

- Walk-over Linear Inground Lighting
- Anti-Glare Design Matched by Accurate Lens
- Long Lifespan > 50,000hours
- Working Temperature: -30℃~50℃

MAIN MATERIAL

- LED Brand: GUBO
- Driver Brand: GUBO
- Housing: Aluminum Radiator Housing
- [FRT-SMS304] Trim: SUS304 Stainless Steel
- [BDC] Diffuser: Clear Tempered Glass Diffuser
- Pre-wired: 0.5meters 3C18AWG Power Cable

INSTALLATION

- Suitable for Exterior Light, Like Building, Plaza
- [FRGT]: Ground or Wall Recessed.
- Maximum Bearing Weight: 1500kgs.
- Notes: Sleeve need to be Pre-buried Advance.
- [FRTF]: Recessed Trim Fixture by Flange Clamp
- Thickness of False ceiling&Deck: 10/0.4"~52/2"

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/cETL/SAA/SASO.....
- IP67 and IK10 Protection, Class I / III Electric

CUSTOM OPTION

- LED CCT: 1,800K~10,000K/R/G/B/Y
- [CRI]: [E] RA80, [G] RA90, [H] RA97
- [SFB]: Custom Baffle Finish Color by RAL code

WHITE	BLACK	DARK GREY	GREY	PEAL GREY
RAL9010P	RAL9005P	RAL7016P	RAL7043P	RAL9022P

CASE STUDY



MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	LUMEN [LM]	POWER FACTOR	BEAM ANBGLE	CUSTOM DIMMING	INPUT [V]
GTG8521A-MRA95A3C-L330	12W [9W] [6W]	6x5W SMD3535	G2700K	RA90	800	>0.9	[Symmetric] BL6D:6° BL10D:10° BL15D:15° BL25D:25° BL30D:30° BL45D:45° BL60D:60°	[DC24V] [CDP]:PWM(1%) [CDX]:DMX512(1%)	
			G3000K	RA90	810				
			G3500K	RA90	810				
			G4000K	RA90	910				
			G5000K	RA90	910				
			G6500K	RA90	890				
GTG8521A-MRA95A3C-L530	18W [12W]	12x5W SMD3535	G2700K	RA90	1200	>0.9	[Oval] BLV15x45° BLV15x60° BLV30x70°	[AC100~277V] [CDP]:PWM(1%) [CDT]:TRIAC(10%) [CDV]:0~10V(7%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDA]:DALI(1%)	+CV DC24V [+CV DC12V] [CV DC42V] [CV DC42V]
			G3000K	RA90	1220				
			G3500K	RA90	1220				
			G4000K	RA90	1370				
			G5000K	RA90	1370				
			G6500K	RA90	1340				
GTG8521A-MRA95A3C-L1030	36W [24W] [18W]	24x5W SMD3535	G2700K	RA90	2400	>0.9	[BDF] FROSTED LM-35%Less BDF:120° [BGL] LOUVER LM-25%Less	Following by Remote Driver [CDX]:DMX512(1%) [CRZ]:ZIGBEE(1%) [CRF]:2.4G RF(1%) [CRB]:Bluetooth(1%)	[AC100~277V] [AC100~240V] [AC100~347V] 50/60Hz
			G3000K	RA90	2440				
			G3500K	RA90	2440				
			G4000K	RA90	2740				
			G5000K	RA90	2740				
			G6500K	RA90	2680				
	2C@30W	TWG	G2700K	RA90	1930	>0.9			
			G3000K	RA90	1930				
			G3500K	RA90	1930				
			G4000K	RA90	1930				
			G5000K	RA90	1930				
			G6500K	RA90	1930				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.