


| Series          |            | PUMPKIN LIGHT SERIES |           | Model  |                     | CIP-LL0412SAC  |                     |                |
|-----------------|------------|----------------------|-----------|--|---------------------|----------------|---------------------|----------------|
|                 |            |                      |           | <b>Project:</b>  |                     |                |                     |                |
|                 |            |                      |           | <b>Type:</b>   |                     |                |                     |                |
|                 |            |                      |           | <b>Notes:</b>  |                     |                |                     |                |
|                 |            |                      |           | <b>Overview</b>  |                     |                |                     |                |
|                 |            |                      |           | <p>Combining the elements of color, shape, and sound, this acoustic family is an extremely versatile lighting tool for a range of projects. Adopt 0.35"(9mm) polyester fiber in a range of color options.</p> <p>With great acoustic performance, has sound absorbing, non-toxic, non-allergenic, and non-irritant characteristics.</p> <p>E26 base tube in side.</p> <p>For simple design with Polyester fiber, easy to disassemble and install.</p>  |                     |                |                     |                |
| Standards       |            |                      |           | Features   |                     |                |                     |                |
|                 |            |                      |           | <ol style="list-style-type: none"> <li>E26 base for LED bulb, easy to install and replace</li> <li>Permanent flame retardant ASTM E84 Class A</li> <li>The material meet the requirement of EN717-1:2004 standards which are free of formaldehyde and environment friendly</li> <li>Operation Voltage: AC120-277V, non-dimmable, base on led bulb (provided by others)</li> <li>38 acoustic felt colors for option</li> <li>Efficiency: <math>\geq 70\text{lm/w}</math>, base on led bulb (provided by others)</li> <li>NRC reach more than 0.8 base on 200mm air gap</li> <li>Power: Advise max power not exceed 40W</li> </ol> |                     |                |                     |                |
| Type            |            | Suspended            |           | Size   |                     |                |                     |                |
|                 |            |                      |           | Model type   |                     | D              | H                   | Dimension code |
|                 |            |                      |           | CIP-LL0412SAC-D19H23   |                     | 19"(488mm)     | 23"(578mm)          | D19H23         |
|                 |            |                      |           | CIP-LL0412SAC-D26H15   |                     | 26"(665mm)     | 15"(380mm)          | D26H15         |
|                 |            |                      |           | CIP-LL0412SAC-D24H14   |                     | 24"(600mm)     | 14"(355mm)          | D24H14         |
| Ordering Format | Model No.  | Installation         |           | Acoustic Configuration   |                     | Dimension code | Acoustic Color      |                |
|                 | CIP-LL0412 | S                    | Suspended | AC   | Acoustic with light | D19H23         | Acoustic Color Code |                |
|                 |            |                      |           |  |                     | D26H15         |                     |                |
|                 |            |                      |           |  |                     | D24H14         |                     |                |


**Acoustic Color Code**

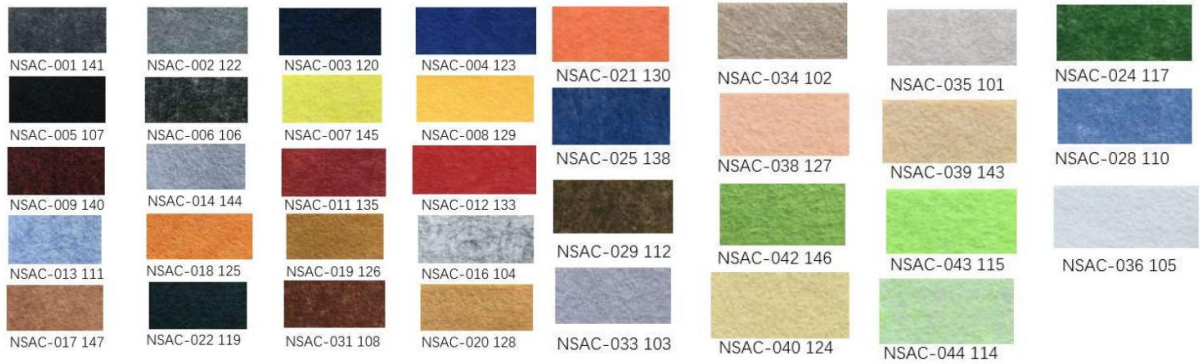

**Order Example:**

CIP-LL0412SAC-D19H23-NSAC-001 141

**Light distribution**

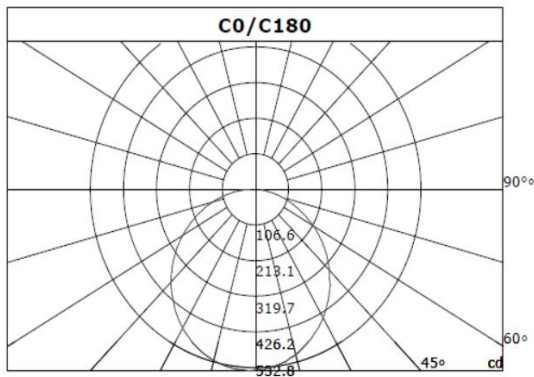

**Optical system**

| Height | Center lx | Diameter  |
|--------|-----------|-----------|
| 1.m    | 530.08 lx | 312.13cm  |
| 2.m    | 132.52 lx | 624.26cm  |
| 3.m    | 58.90 lx  | 936.39cm  |
| 4.m    | 33.13 lx  | 1248.52cm |
| 5.m    | 21.20 lx  | 1560.65cm |
| 6.m    | 14.72 lx  | 1872.78cm |
| 7.m    | 10.82 lx  | 2184.92cm |
| 8.m    | 8.28 lx   | 2497.05cm |
| 9.m    | 6.54 lx   | 2809.18cm |
| 10.m   | 5.30 lx   | 3121.31cm |
| 11.m   | 4.38 lx   | 3433.44cm |
| 12.m   | 3.68 lx   | 3745.57cm |
| 13.m   | 3.14 lx   | 4057.70cm |
| 14.m   | 2.70 lx   | 4369.83cm |
| 15.m   | 2.36 lx   | 4681.96cm |
| 16.m   | 2.07 lx   | 4994.09cm |

**Material**

**Shade** 0.35"(9mm) Polyester fiber

**LED system**

**We reserve the right to make any design changes for continuous improvement without notification, contact us for the latest technical information!**

**File name**

**NS/SS-LL0412SAC-REV1.0**