

JENS

LED Garage Luminaire with Uplight

A round parking-garage luminaire available in two housing sizes, each with four adjustable wattage levels and selectable CCT. Standard uplight reduces the cave effect common with traditional garage lighting. Surface or conduit mountable, with optional motion and PIR sensors, emergency backup, visors, and wire-mesh guards.

- Two bodies — Ø10.7" (25/40/60W) or Ø12.7" (80/100W)
- Each wattage is 4-position adjustable — 100 / 75 / 50 / 30 %
- Standard uplight component with on/off switch
- Selectable CCT 3000K / 4000K / 5000K · up to 165 lm/W · CRI 70 (80 optional)
- Surface or conduit mounting · aluminum alloy
- Constant-current driver · 4kV/6kV surge protection



cETLus

IP65



IK08

LUMEN OUTPUT	4,125 – 16,500 lm
EFFICACY	Up to 165 lm/W @4000K
COLOR TEMP / CCT	3000K / 4000K / 5000K selectable
CRI	70 (Ra) · 80 optional
DISTRIBUTION	Type V
LED SOURCE	LED 2835
WATTAGE	25 / 40 / 60 / 80 / 100W — each power-adjustable (100/75/50/30%)
VOLTAGE	120–277V · 120–347V
POWER FACTOR	>0.9

DIMMING	Not dimmable — 4-step wattage adjustment
SURGE PROTECTION	4kV line-line · 6kV line-earth
DRIVER	Constant-current · PF >0.9
FINISH	White
IP / IMPACT	IP65
MATERIAL	Aluminum alloy
MOUNTING	Surface or conduit
DIMENSIONS	Ø10.7" × 3" or Ø12.7" × 3.3"
WARRANTY	5-Year Limited

ON-SITE CONFIGURATION

Standard on every model

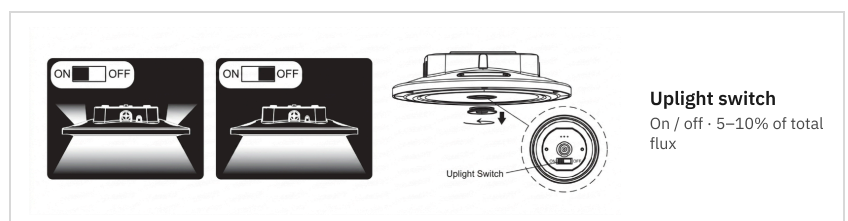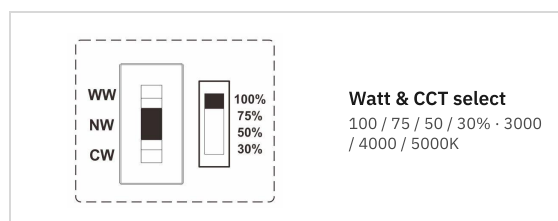

ORDERING


CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	CCT	CRI	VOLTAGE	MOUNTING	OPTIONS	FINISH
JENS	25 25W 40 40W 60 60W 80 80W 100 100W	3CCT (3000/ 4000/5000K)	70 Ra70 (standard) 80 Ra80	U 120-277V E 120-347V	SF Surface CM Conduit	N None MW Microwave sensor PIR PIR sensor EB8 Emergency backup 8W · 1.5h	WH White

Build Your Order Code — example values shown in grey

MODEL	WATTAGE	CCT	CRI	VOLTAGE	MOUNTING	OPTIONS	FINISH
JENS	60	3CCT	70	U	SF	N	WH


FINISH



WH
White

DIMENSIONS & WEIGHT

BODY	DIAMETER	HEIGHT	BACKPLATE	NET WEIGHT
25-60W Ø10.7" body	Ø10.7" (272 mm)	3" (78 mm)	5.43" (138 mm)	4.63 lb (2.1 kg)
80-100W Ø12.7" body	Ø12.7" (322 mm)	3.3" (84 mm)	6.1" (155 mm)	5.73 lb (2.6 kg)

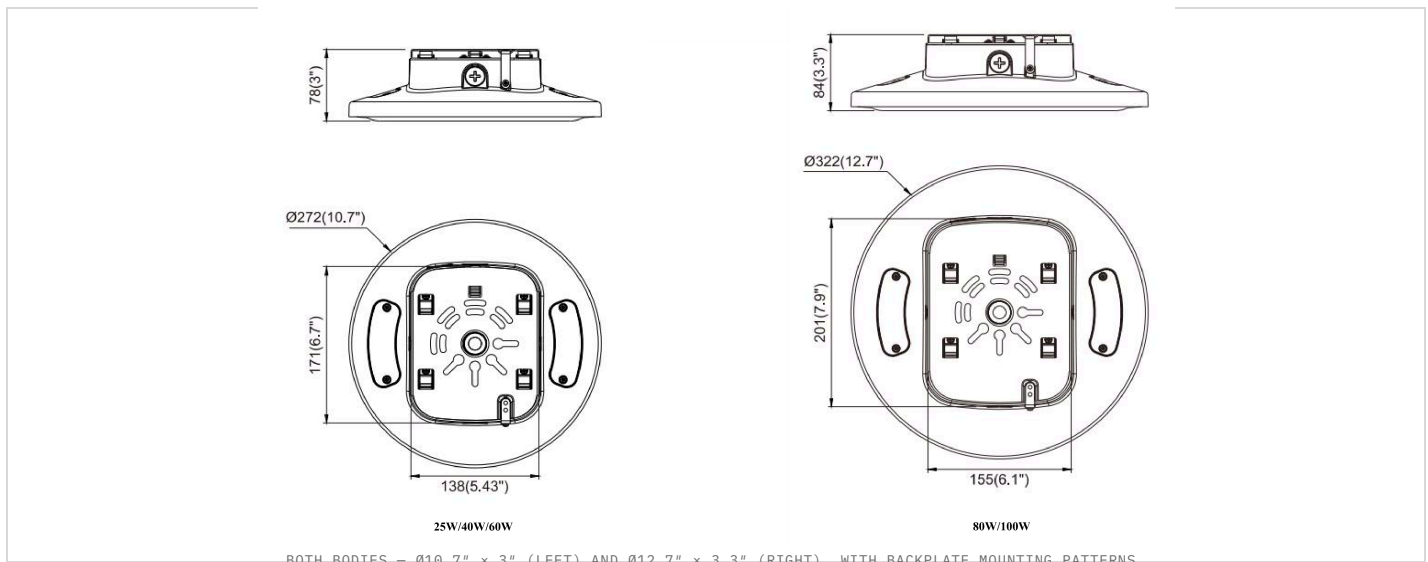

MOUNTING

Surface to a J-box, or conduit-pendant.



SF
Surface mount
Direct to junction box



CM
Conduit mount
Rigid conduit pendant

OPTIONS

OPTIONS

MW	Microwave motion sensor — 100% output only
PIR	PIR occupancy sensor — 100% output only
EB8	Emergency backup, 8W · 1.5 h

ACCESSORIES (ORDERED SEPARATELY)

Sized per body — specify the 25–60W (Ø10.7") or 80–100W (Ø12.7") body when ordering.



MS
Motion sensor
Ø2" surface puck




PIR
PIR sensor
Ø2.4" dome



EB8
Emergency kit
8W · 90 min backup



VSR
Visor
Aluminum glare shield



BSP
Bird spikes
Steel deterrent strip



WMG
Wire-mesh guard
SUS304 stainless

PHOTOMETRY

DELIVERED LUMENS – 4000K · RA70, FULL OUTPUT

Optic	CCT	25W	40W	60W	80W	100W
Type V	4000K	4,125 lm	6,600 lm	9,900 lm	13,200 lm	16,500 lm

Efficacy 150 lm/W at 3000K · 165 lm/W at 4000K · 155 lm/W at 5000K, Ra70. Flux tolerance ±10%.

Distribution Type V **Efficacy** Up to 165 lm/W @4000K **CRI** 70 (Ra) · 80 optional

IES File Available on request

