

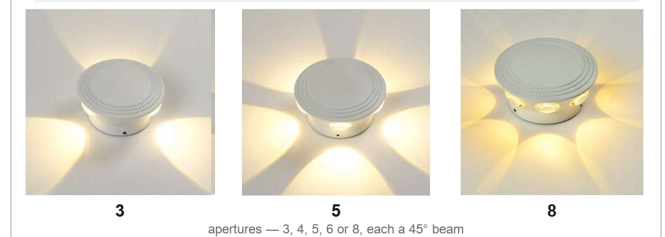


CIAN

Radial-Beam Wall Luminaire

A die-cast aluminum wall luminaire producing three to eight radial 45° beams that create a distinctive petal-shaped light pattern across the wall. Measures 4.92" in diameter, projecting 2.44" – 2.60" on the JBOX plate — with each aperture powered by an individual 2W module. IP65 and IK08 rated for interior and exterior applications.

- Three, four, five, six or eight apertures, evenly spaced around the housing
- 45° beam per aperture — a radial petal pattern on the wall
- Round die-cast aluminum housing, Ø 4.92", projecting 2.44" (2.60" on the JBOX plate)
- 2W per aperture — 6 to 16W total
- 2700K / 3000K / 4000K / 6500K, plus tunable white and RGBW
- 90 CRI · IP65 · IK08 · withstand 3.75kV, surge 6kV
- Surface mounts, or on a JBOX mounting plate over an outlet box
- Five RAL powder-coat finishes; custom RAL available

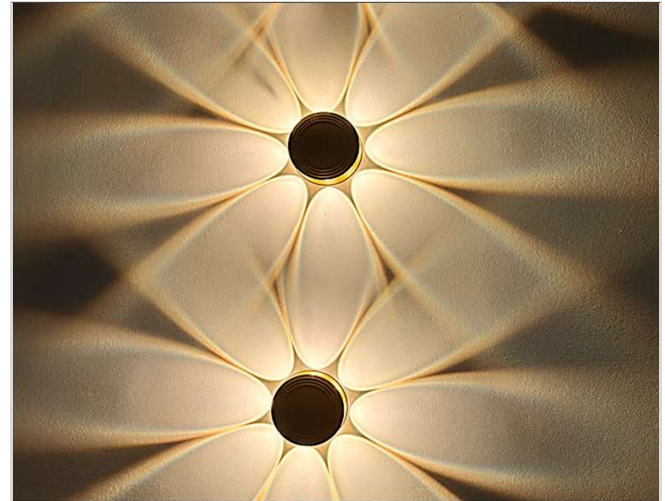

LUMEN OUTPUT	480 – 1,336 lm delivered (by aperture count & CCT)
COLOR TEMP / CCT	2700 / 3000 / 4000 / 6500K · Tunable White · RGBW
CRI	90 (Ra)
DISTRIBUTION	45° per aperture
LED SOURCE	GUBO LED · GUBO driver
WATTAGE	2W per aperture · 6 – 16W total
VOLTAGE	100–277V AC · 100–240V AC · 12 / 24 / 42V DC (remote driver)
POWER FACTOR	>0.4 – >0.6 (by aperture count)
DIMMING	PWM · DMX512 · TRIAC · 0–10V · DALI · Zigbee · Bluetooth · 2.4G RF (non-dimming standard)

SURGE PROTECTION	6kV · withstand voltage 3.75kV
DRIVER	GUBO integral driver · remote constant-voltage driver on DC versions
FINISH	White, Black, Grey, Anthracite Grey, Brass
IP / IMPACT	IP65 · IK08
MATERIAL	Die-cast aluminum · high-efficiency PC lens
MOUNTING	Surface mount · JBOX mounting plate (FJP) · deep box required for the driver
DIMENSIONS	Ø 4.92" × 2.44" projection (Ø 125 × 62 mm) · 2.60" (66 mm) on the JBOX plate
LIFETIME	>50,000 hours
WARRANTY	5-Year

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	APERTURE	VOLTAGE	CCT	CONTROLS	FINISH
CIAN	A3 3 apertures, 120° apart · 6W A4 4 apertures, 90° apart · 8W A5 5 apertures, 72° apart · 10W A6 6 apertures, 60° apart · 12W A8 8 apertures, 45° apart · 16W	U 100-277V L 100-240V DC12 12V DC* DC24 24V DC* DC42 42V DC*	27 2700K 30 3000K 40 4000K 65 6500K TW Tunable White (2700-6500K) RGBW RGBW (2700K white)	N Non-dimming (standard) PWM PWM DMX DMX512 TR TRIAC** DV 0-10V** DA DALI** ZB Zigbee** BT Bluetooth** RF 2.4G RF**	WH White BK Black GY Grey AGY Anthracite Grey BRS Brass CC Custom RAL

* DC versions are supplied with a remote constant-voltage driver. ** Requires the remote-driver (DC) build.

Build Your Order Code — example values shown in grey

MODEL	APERTURE	VOLTAGE	CCT	CONTROLS	FINISH
CIAN	A6	U	30	N	WH
CIAN	A6	U	30	N	WH

STANDARD FINISHES




WH White (RAL 9010)	BK Black (RAL 9005)	GY Grey (RAL 7042)	AGY Anthracite Grey (RAL 7016)	BRS Brass (RAL 1024)
------------------------	------------------------	-----------------------	-----------------------------------	-------------------------

CONFIGURATIONS



DIMENSIONS

MOUNTING	DIAMETER	PROJECTION
Surface	4.92" (Ø 125 mm)	2.44" (62 mm)
JBOX plate (FJP)	4.92" (Ø 125 mm)	2.60" (66 mm)

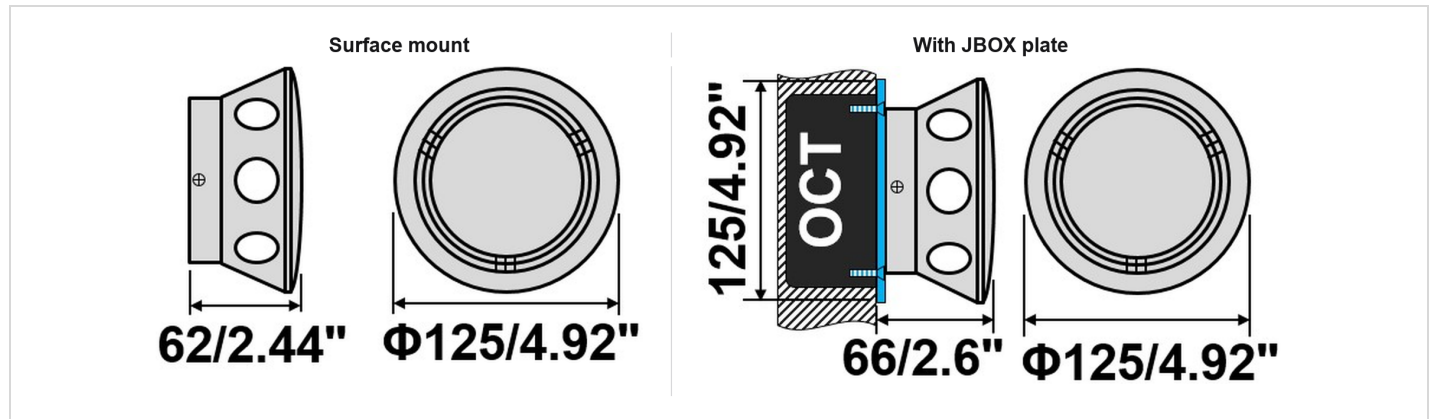

OPTIONS

MADE TO ORDER — CONSULT FACTORY

CM	Custom CCT — 1800K to 10000K, or red / green / blue / yellow	FJP	JBOX mounting plate
CR	Ra80, or Ra97 with RG0 eye-protection rating	SFH	Custom housing finish to a RAL code

PHOTOMETRY

DELIVERED LUMENS BY APERTURE COUNT & CCT

APERTURES · TOTAL W	2700K	3000K	4000K	6500K	TUNABLE WHITE	RGBW
3 · 6W	480 lm	501 lm	495 lm	495 lm	360 lm	300 lm
4 · 8W	640 lm	668 lm	660 lm	660 lm	480 lm	400 lm
5 · 10W	800 lm	835 lm	825 lm	825 lm	600 lm	500 lm
6 · 12W	960 lm	1,002 lm	990 lm	990 lm	720 lm	600 lm
8 · 16W	1,280 lm	1,336 lm	1,320 lm	1,320 lm	960 lm	800 lm

Each aperture carries its own 2W module; totals are the per-aperture figure times the aperture count, as published. Power factor >0.4 to >0.6 depending on aperture count. Measured at 25°C; power and flux tolerance ±10%, CRI ±5.

Distribution 45° per aperture **Efficacy** — **IES File** On request