
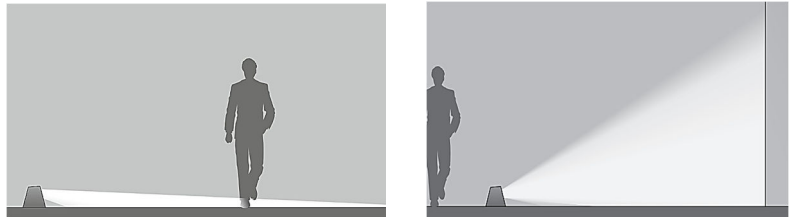


LED GROUND MOUNTED FLOODLIGHT

INTRODUCTION

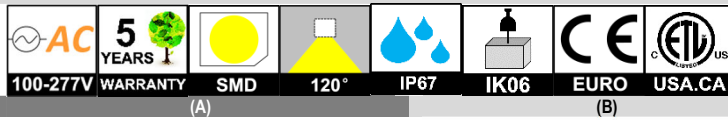

FEATURE

Luminaires with Safety Guard.
Luminaires For Visual Guidance.
Use on Ground, Pillars
Perfectly Adapted Their Structure and Design
Long Lifespan > 50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Power Coated Aluminum
Optics: Nano Coated Reflecting
(A)Diffuser: Frosted Glass Diffuser
(B)Diffuser: Clear Glass Diffuser

INSTALLATION

Solid Surface Mounted
Can be Mounted on 6" JBOX
Suitable for Garden, Park, Plaza.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/TUV/CB/cETL/SAA Standard
IP67 Protection, Class I Electric

OPTION

LED CCT: 2000K/G2700K/3500K/G6000K/R/G/B/A
LED Grown Light: **Full Spectrum** 380nm~840nm
[CRI]: RA80, [G] RA90, [H] RA97
[CSP]: PIR Motion Sensor
Custom Housing Finish: Colors by RAL Code

WHITE [HMWT]	BLACK [HMBK]	SILVER [HMSV]	DARK GREY [HMGRD]	BRASS [HMBS]
------------------------	------------------------	-------------------------	-----------------------------	------------------------

DIMENSION: [UNIT: MM]

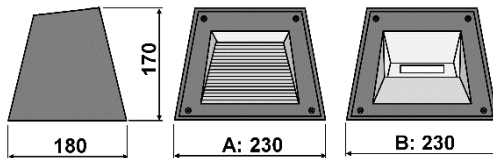


MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTG5408A	20W [12W] [30W]	36x2W SMD3030	G2700K	RA90	600	> 0.9	120°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(7%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	AC100~240V [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	650				
			G3500K	RA90	650				
			G4000K	RA90	700				
			G5000K	RA90	700				
	2C@20W	20TW	G2700K G6000K	RA90	560	> 0.6			
	20W [12W] [30W]	36x2W SMD3030	H2700K	RA97	490	> 0.9			
			H3000K	RA97	540				
			H3500K	RA97	540				
			H4000K	RA97	580				
H5000K			RA97	580					
2C@20W	20TW	H2700K H6000K	RA97	460	> 0.6				
3C@20W	24RGB	620nm 520nm 465nm	/	420	> 0.5				
4C@20W	24RGBW	620nm 520nm 465nm 2700K	/	420	> 0.5				
GTG5408B	20W [12W] [30W]	36x2W SMD3030	G2700K	RA90	1610	> 0.9	120°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(7%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1%) [CDA]:DALI(1%) [CDP]:PWM(1%)	AC100~240V [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	1730				
			G3500K	RA90	1730				
			G4000K	RA90	1850				
			G5000K	RA90	1850				
	2C@20W	24TW	G2700K G6000K	RA90	1490	> 0.6			
	20W [12W] [30W]	36x2W SMD3030	H2700K	RA97	1320	> 0.9			
			H3000K	RA97	1440				
			H3500K	RA97	1440				
			H4000K	RA97	1560				
H5000K			RA97	1560					
2C@20W	24TW	H2700K H6000K	RA97	1220	> 0.6				
3C@20W	24RGB	620nm 520nm 465nm	/	1100	> 0.5				
4C@20W	24RGBW	620nm 520nm 465nm 2700K	/	1220	> 0.5				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

LED GROUND MOUNTED FLOODLIGHT

INTRODUCTION



FEATURE

Luminaires with Safety Guard.
Luminaires For Visual Guidance.
Use on Ground, Pillars
Perfectly Adapted Their Structure and Design
Long Lifespan > 50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Power Coated Aluminum
Optics: Nano Coated Reflecting
(A)Diffuser: Frosted Glass Diffuser
(B)Diffuser: Clear Glass Diffuser

INSTALLATION


Solid Surface Mounted
Can be Mounted on 6" JBOX
Suitable for Garden, Park, Plaza.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/TUV/CB/cETL/SAA Standard
IP67 Protection, Class I Electric

OPTION

LED CCT: 2000K/G2700K/3500K/G6000K/R/G/B/A
LED Grown Light: **Full Spectrum** 380nm~840nm
[CRI]: RA80, [G] RA90, [H] RA97
[CSP]: PIR Motion Sensor
Custom Housing Finish: Colors by RAL Code

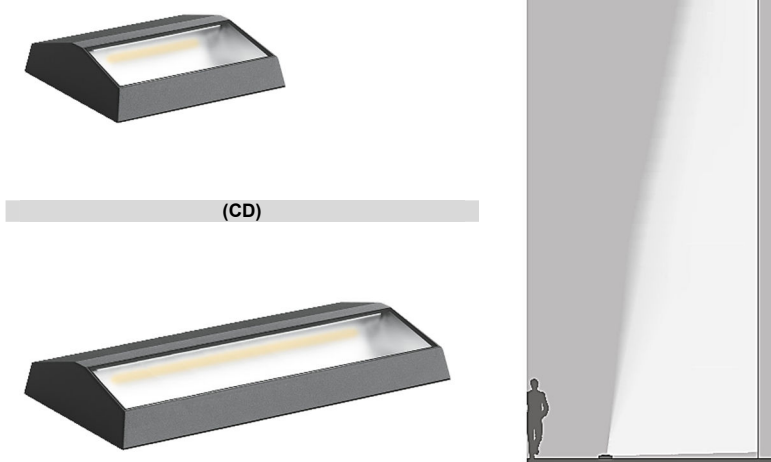


DIMENSION: [UNIT: MM]

[POST TOP]

POST: Φ150mm

Height: L200~L3000MM

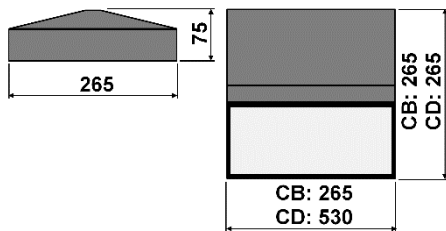

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTG5408CB	50W [30W]	72x2W SMD3030	G2700K	RA90	3680	>0.9	120°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(7%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1‰) [CDA]:DALI(1‰) [CDP]:PWM(1‰)	AC100~240V [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	4000				
			G3500K	RA90	4000				
			G4000K	RA90	4250				
			G5000K	RA90	4250				
			G6000K	RA90	4250				
	2C@50W	60TW	G2700K G6000K	RA90	3170	>0.6			
	50W [30W]	72x2W SMD3030	H2700K	RA97	3020	>0.9			
			H3000K	RA97	3300				
			H3500K	RA97	3300				
			H4000K	RA97	3600				
			H5000K	RA97	3600				
H6000K			RA97	3600					
2C@50W	60TW	H2700K H6000K	RA97	2610	>0.6				
3C@50W	24RGB	620nm 520nm 465nm	/	2360	>0.6				
4C@50W	24RGBW	620nm 520nm 465nm 2700K	/	2610	>0.5				
GTG5408CD	100W [60W]	144x2W SMD3030	G2700K	RA90	7660	>0.9	120°	[CDT]:TRIAC(10%) [CDV]:0/1~10V(7%) [CDV0]:0~10V(1%) [CDV1]:1~10V(15%) [CDX]:DMX512(1‰) [CDA]:DALI(1‰) [CDP]:PWM(1‰)	AC100~240V [AC100~277V] [AC100~347V] 50/60Hz
			G3000K	RA90	8260				
			G3500K	RA90	8260				
			G4000K	RA90	8860				
			G5000K	RA90	8860				
			G6000K	RA90	8860				
	2C@100W	120TW	G2700K G6000K	RA90	6350	>0.6			
	100W [60W]	144x2W SMD3030	H2700K	RA97	6290	>0.9			
			H3000K	RA97	6880				
			H3500K	RA97	6880				
			H4000K	RA97	7480				
			H5000K	RA97	7480				
H6000K			RA97	7480					
2C@100W	120TW	H2700K H6000K	RA97	5200	>0.6				
3C@100W	48RGB	620nm 520nm 465nm	/	4700	>0.6				
4C@100W	48RGBW	620nm 520nm 465nm 2700K	/	5200	>0.5				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.