


ONDRA 445


Diffuse Reflection Linear Light



Linkable



Pendant Mount



Section

- 3.94" (100 mm) height
- 4.47" (113 mm) width

SPECIFICATIONS



Switch Select

3,000 – 10,000 Lumens



CCT Select

3000K / 3500K / 4000K




Wattage Select

30 – 100 Watts




ETL Listed — Intertek
5 year warranty

FEATURES

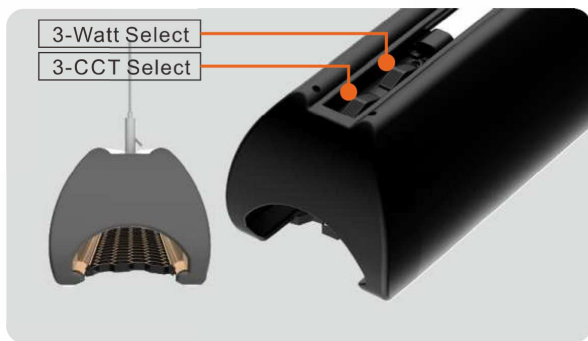

- 3-watt select
- 3-CCT select

BEAM ANGLES

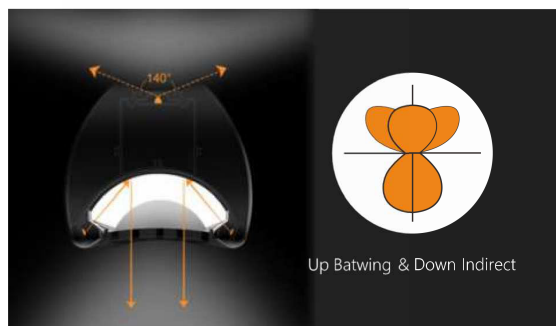

Up batwing & down indirect
140° beam spread, 30% up / 70% down

ORDERING INFORMATION

MODEL	LENGTH	WATTAGE SELECT	OUTPUT LUMEN (UP 30% / DOWN 70%)	NOMINAL EFFICACY	CCT SELECT	INPUT VOLTAGE	DIMMABLE	CRI
OND-9LSUD4FT50WB2D1HV	4'	30W / 40W / 50W	3000 / 4000 / 5000 lm	100 lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>90
OND-9LSUD8FT100WB2D1HV	8'	60W / 80W / 100W	6000 / 8000 / 10000 lm	100 lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>90