

LED POST TOP LUMINAIRES



Shown with Frosted Lens

Bocca 5 with Clear Lens, BC1 Shade (Optional, Adder) and AGB Anti-Glare Shield (Optional, Adder)

← Fitter section slips over 3" or 2 1/2" pole or tenon



Bocca 5 with Frosted Lens, No Shade and AGB Anti-Glare Shield



Bocca 5 with No Lens and BC1-SM Small Shade

EPA: 2.78 (with Lens); 1.45 (No Lens)
Weight: 28 lbs (Max.)

Specifications and Features:

Radiant™ LED

- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Contact Factory

Distribution

- Types II, III, IV, V

Electrical

- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10V Dimmable Driver
- Standard Surge Protection Included (6kV line-line; 10k-V line-earth)

Controls (Optional)

- Button Eye Photo Control (PC)

Housing

- Cast Aluminum Housing with Rings
- Four Uprights

Finish

- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings

- ETL Listed to UL 1598 Standard for Wet Location and IP66.
- LED is IP66 Rated

Warranty

- 5 Year Limited Warranty



Order Information Example:

BOCCA5CAN40W3KU5BC1PTPCBZ

BOCCA5								PT		
Model	Globe/Lens	Shield	Wattages	CCT	Voltage	Optics	Shades	Mounting	Options	Finish
BOCCA5=Bocca 5	CA=Clear Acrylic FA=Frosted Acrylic WA=White (Opal) Acrylic N=No Secondary Lens	N=None AGB=Anti-Glare Shield	10W=10w 15W=15w 20W=20w 30W=30w 40W=40w 50W=50w 60W=60w	3K=3000K 4K=4000K 5K=5000K	U=120-277V H=347/480V	2=Type II 3=Type III 4=Type IV 5=Type V	BC1=28" Shade BC1-SM=Small Shade, Top Mount N=None	PT=Post Top	PC=Button Eye Photo Control H=House Side Shield N=None	STANDARD FINISHES BK=Black BZ=Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic GY=Light Gray TBK=Textured Black CC=Custom Color (Consult Factory)

LED POST TOP LUMINAIRES

Photometric Data For Lensed Fixtures



8" Radiant™



6" Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Bocca 5								
Wattage (Catalog Logic)		10 Watts (10W)	15 Watts (15W)	20 Watts (20W)	30 Watts (30W)	40 Watts (40W)	50 Watts (50W)	60 Watts (60W)
Radiant Size (DIA.)		6"	6"	6"	6"	8"	8"	8"
Input Watts		10.2	14.6	20.4	30.6	40.8	51.0	56.6
Optic	CCT	Delivered Lumens						
2 = Type II Clear or Frosted	3K	1,344	1,763	2,352	3,527	4,703	5,878	7,055
	4K	1,371	1,800	2,400	3,600	4,800	6,001	7,200
	5K	1,392	1,828	2,437	3,655	4,874	6,091	7,310
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2
3 = Type III Clear or Frosted	3K	1,342	1,760	2,348	3,521	4,695	5,869	7,043
	4K	1,369	1,797	2,396	3,595	4,792	5,991	7,188
	5K	1,390	1,825	2,433	3,649	4,866	6,081	7,298
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2
4 = Type IV Clear or Frosted	3K	1,312	1,721	2,296	3,443	4,591	5,739	6,887
	4K	1,339	1,758	2,343	3,515	4,686	5,858	7,029
	5K	1,359	1,784	2,379	3,569	4,758	5,947	7,136
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2
5 = Type V Clear or Frosted	3K	1,373	1,801	2,402	3,603	4,804	6,005	7,207
	4K	1,401	1,839	2,452	3,678	4,903	6,130	7,355
	5K	1,423	1,867	2,489	3,734	4,979	6,222	7,467
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2
5 = Type V with White-Opal Lens	3K	964	1,446	1,928	2,893	3,857	4,821	5,785
	4K	984	1,477	1,969	2,953	3,937	4,921	5,906
	5K	999	1,499	1,998	2,998	3,997	4,997	5,996
	BUG Rating	B1-U3-G1	B1-U3-G1	B1-U3-G2	B1-U4-G2	B1-U4-G2	B2-U4-G3	B2-U5-G3

Please refer to the fixture's IES file for detailed information. Subject to change.

LED POST TOP LUMINAIRES

Photometric Data

For Open Full Cutoff Fixtures



8" Radiant™



6" Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Bocca 5 with No Secondary Lens								
Wattage (Catalog Logic)		10 Watts (10W)	15 Watts (15W)	20 Watts (20W)	30 Watts (30W)	40 Watts (40W)	50 Watts (50W)	60 Watts (60W)
Radiant Size (DIA.)		6"	6"	6"	6"	8"	8"	8"
Input Watts		10.2	14.6	20.4	30.6	40.8	51.0	56.6
Optic	CCT	Delivered Lumens						
2 = Type II Clear PC Lens	3K	1,099	1,634	2,179	3,268	4,358	5,447	6,537
	4K	1,112	1,668	2,224	336	4,448	5,560	6,672
	5K	1,129	1,634	2,258	3,387	4,516	5,644	6,774
	BUG Rating	B0-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G1
3 = Type III Clear PC Lens	3K	1,142	1,713	2,284	3,427	4,569	5,711	6,853
	4K	1,165	1,749	2,332	3,497	4,664	5,829	6,996
	5K	1,183	1,776	2,367	3,550	4,734	5,919	7,102
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2
4 = Type IV Clear PC Lens	3K	1,140	1,711	2,281	3,422	4,562	5,703	6,843
	4K	1,164	1,747	2,329	3,492	4,657	5,821	6,986
	5K	1,182	1,773	2,364	3,546	4,728	5,910	7,092
	BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3
5 = Type V Clear PC Lens	3K	1,210	1,815	2,420	3,632	4,842	6,052	7,262
	4K	1,235	1,854	2,471	3,706	4,942	6,177	7,413
	5K	1,254	1,882	2,508	3,762	5,017	6,272	7,526
	BUG Rating	B1-U0-G0	B1-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2

Please refer to the fixture's IES file for detailed information. Subject to change.

LED POST TOP LUMINAIRES

Accessories & Replacement Parts:

Accessories (Order Separately, Field Installed)

SSBS Stainless Steel Bird Spikes

Style Options



**Bocca 5 with Lens,
BC1 Shade**



**Bocca 5 with No Lens,
BC1 Shade**



**Bocca 5 with Lens, BC1
Shade and AGB Anti-Glare Shield**



**Bocca 5 with No Lens, BC1
Shade and AGB Anti-Glare Shield**




**Bocca 5 with Lens,
BC1-SM Small Shade**



**Bocca 5 with No Lens,
BC1-SM Small Shade**



**Bocca 5 with Lens, BC1-SM
Small Shade and AGB Anti-Glare
Shield**

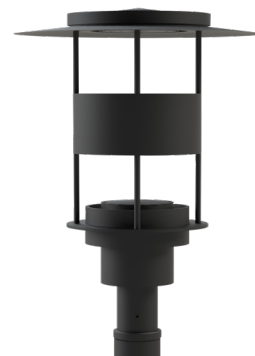

**Bocca 5 with No Lens,
BC1-SM Small Shade and
AGB Anti-Glare Shield**



**Bocca 5 with Lens,
No Shade**



**Bocca 5 with No
Lens, No Shade**






**Bocca 5 with Lens, No
Shade and AGB Anti-Glare
Shield**






**Bocca 5 with No Lens,
No Shade and AGB Anti-Glare
Shield**

LED POST TOP LUMINAIRES

Dimensions

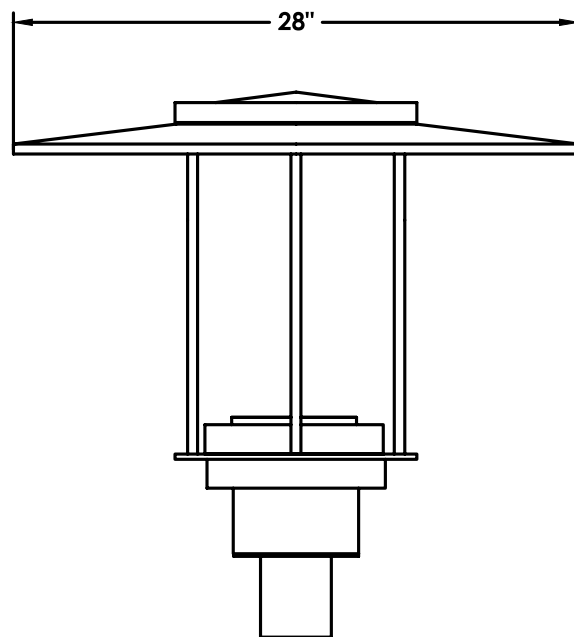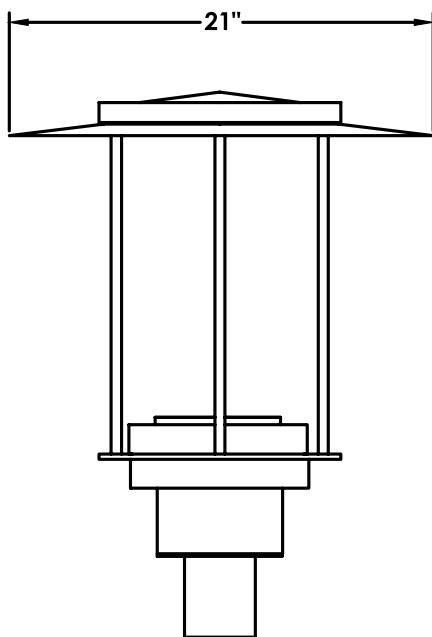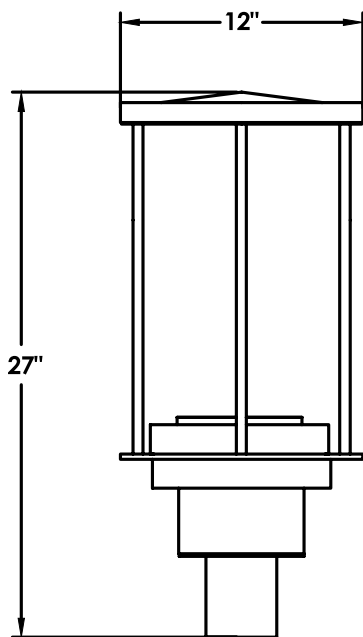

BOCCA5 Without Lens

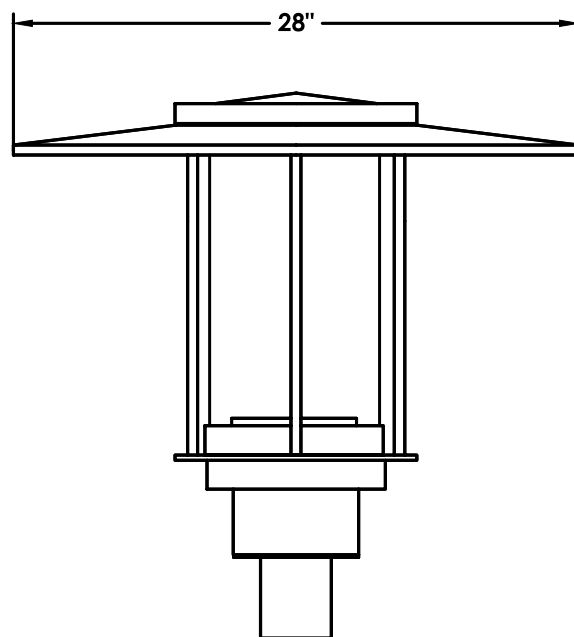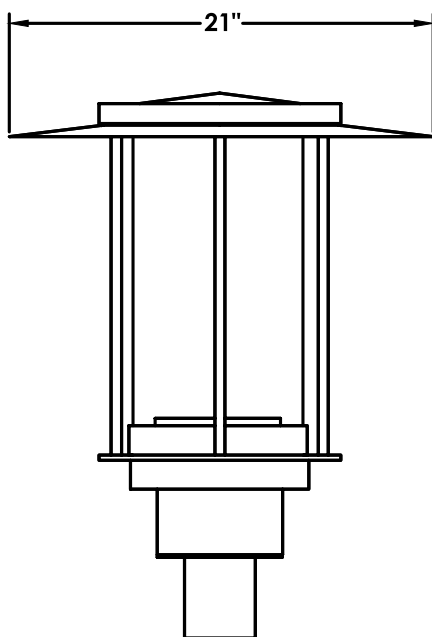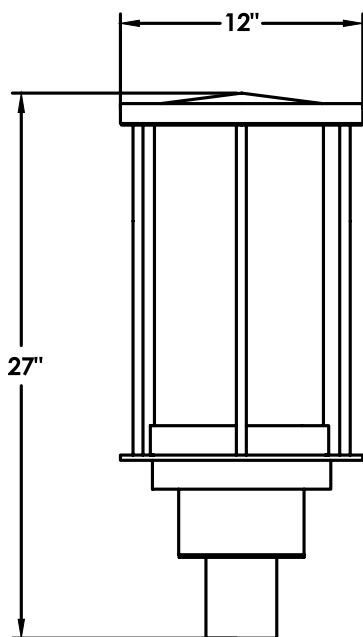

BOCCA5 With Lens