

WALLY

Small Full Cutoff Wall Pack

A small full-cutoff wall pack that replaces HID systems up to 175W MH or HPS, in a choice of Type III or Type V optics. Die-cast hinged housing with a tempered clear flat glass lens, for retail, industrial parks, schools, transit and medical facilities. Recommended mounting height 8–15 ft.

- Two optics — Type III (C) or Type V (F)
- Replaces up to 175W MH / HPS · 15 / 22W
- Full cutoff · zero uplight · tempered flat glass lens
- Photocell, fusing and 90-min battery options
- Die-cast aluminium · IP65 wet location · BAA compliant



DLC

cETLus

IP65

Wet Location

BAA Compliant

LUMEN OUTPUT	Up to 2,432 lm
EFFICACY	Up to 103 lm/W
COLOR TEMP / CCT	4000K / 5000K
CRI	70+ (Ra)
DISTRIBUTION	Type III · Type V
LED SOURCE	EasyLED aluminum boards
WATTAGE	15 / 22W
VOLTAGE	120–277V · 347–480V
POWER FACTOR	>0.90 · THD <20%
DIMMING	0–10V (100–10%)
SURGE PROTECTION	2kV internal

DRIVER	Electronic · 0–10V dimming
FINISH	Bronze, Custom
OPERATING TEMP	–40°C to +40°C
IP / IMPACT	IP65 · Wet Location
MATERIAL	Die-cast aluminum · tempered clear flat glass lens
LENS	Tempered clear flat glass
MOUNTING	Over a 4" recessed outlet box, or ½" surface conduit
DIMENSIONS	8¾" W × 9½" L × 8⅝" H
LIFETIME	L70 196,000 hrs @25°C
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	LENS	CONTROLS	OPTIONS	FINISH
WALLY	15 15W 22 22W	U 120-277V H 347-480V (22W only)	40 4000K 50 5000K	T3 Type III T5 Type V	C Clear Glass	N None DV 0-10V Dimming PC Photocell PCP Pencil Photocell PCS Swivel Photocell	N None SF Single Fuse* DF Double Fuse* SP Surge Protection BU Battery 90 min* BUC Cold-Start Batt*	BZ Bronze CC Custom

* Fusing and battery options require 120-277V (U).


Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	LENS	CONTROLS	OPTIONS	FINISH
WALLY	15	U	40	T3	C	N	SF	BZ

STANDARD FINISHES




BZ
Bronze



CC
Custom

DIMENSIONS

FIXTURE	HEIGHT (A)	LENGTH (B)	WIDTH (D)
Overall	8 ⁵ / ₈ " (219 mm)	9 ¹ / ₂ " (241 mm)	8 ³ / ₄ " (222 mm)

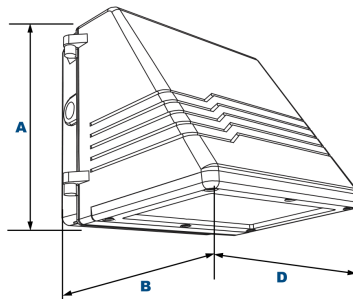

OPTIONS

CONTROLS

DV	0–10V dimming (100–10%)
PC	Photocell, 120–277VAC
PCP	Pencil photocell — supplied to match the fixture voltage
PCS	Swivel photocell — supplied to match the fixture voltage



PROTECTION & EMERGENCY

SF	Single fuse
DF	Double fuse
SP	Surge protection
BU	Battery backup, 90 minutes
BUC	Cold-start battery backup, –20°C, 90 minutes

ACCESSORIES (SOLD SEPARATELY)

SSBS	Stainless steel bird spikes
------	-----------------------------

PHOTOMETRY

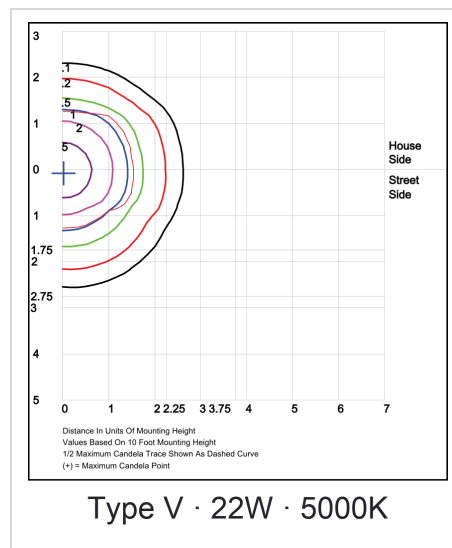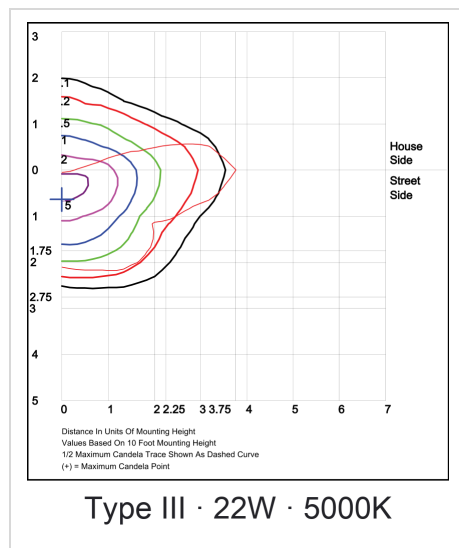

DELIVERED LUMENS

Optic	CCT	15W 15.8W	22W 23.7W
T3 Type III	4000K	1,386	2,079
	5000K	1,444	2,166
	BUG	B0-U1-G0	B1-U2-G1
T5 Type V	4000K	1,556	2,334
	5000K	1,621	2,432
	BUG	B1-U2-G0	B1-U2-G0

Delivered lumens by optic. DLC qualified: Type V, 22W, 5000K.

DISTRIBUTION Type III · Type V **EFFICACY** Up to 103 lm/W **IES FILE** Available on request