

ODA

Shielded Recessed Step Light

A compact 2" square recessed step light in solid brass with an integrated shield to reduce glare and direct view of the source. Designed for walls, risers, and hardscape applications, with CCT options from 2200K to 6500K, plus RGBW and a turtle-friendly Amber option for wildlife-sensitive applications.

- Solid brass body with an integral shield — 2" square face, 3/8" shield projection, 3 3/8" behind the wall
- Shielded aperture cuts direct view of the source — for glare-sensitive and wildlife-ordinance sites
- Four beam angles — 19° spot · 38° flood · 54° wide flood · 120° wide angle flood
- Three outputs — 2W / 3W / 6W at 200 / 300 / 400 lm
- Eight colours — 2200K to 6500K, RGBW, and Amber (TF)
- Fourteen finishes — nine brass and patina, five PVD Premium
- cULus wet listed · Wildlife lighting · Made in USA



cULus

Wet Location

Made in USA



LUMEN OUTPUT	200 / 300 / 400 lm (by wattage)
COLOR TEMP / CCT	2200K / 2700K / 3000K / 4000K / 5000K / 6500K · Amber (TF) · RGBW
BEAM ANGLE	19° spot · 38° flood · 54° wide flood · 120° wide angle flood
WATTAGE	2W / 3W / 6W
VOLTAGE	120V AC or 12–15V DC

FINISH	Matte Bronze, Verde, Moss, Black, Rusty, Satin Brass, Aged Brass, Raw Copper, Natural Copper
MATERIAL	Solid brass
LENS	Tempered glass — clear or frosted
MOUNTING	Recessed — 1 3/4" OD rough-in or concrete pour sleeve

ORDERING


CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	LENS	OPTIONS	FINISH		
ODA	2 2W	AC120 120V AC	22 2200K	19 19° spot	CA Clear	N None	MBZ	VD	MO
	3 3W	DC12 12V DC	27 2700K	38 38° flood	FA Frosted	PS6 Pour sleeve	BK	RU	SB
	6 6W		30 3000K	54 54° wide flood		PSQ Pour sleeve, flanged	AGB	RC	NC
			40 4000K	120 120° wide angle flood		PS4 Pour sleeve, plate	PVDP	PVDS	PVDG
			50 5000K			PST Pour sleeve, tabs	PVDZ	PVDK	
			65 6500K						
			AM Amber (TF)						
RGBW									
					PSC Pour sleeve, threaded				

Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	LENS	OPTIONS	FINISH
ODA	2	AC120	27	120	CA	PS6	PVDS

STANDARD FINISHES



MBZ
Matte Bronze

VD
Verde

MO
Moss

BK
Black

RU
Rusty

SB
Satin Brass

AGB
Aged Brass

RC
Raw Copper



NC
Natural Copper

PVD PREMIUM FINISHES



PVDP
PVD Polished

PVDS
PVD Satin


PVDG
PVD Graphite

PVDZ
PVD Bronze

PVDK
PVD Black


DIMENSIONS

MODEL	FACE (W × H)	DEPTH BEHIND FACE	BODY HEIGHT	FLANGE	SHIELD PROJECTION
ODA	2" × 2" (51 × 51 mm)	3 3/8" (86 mm)	1 9/16" (40 mm)	1/8" (3 mm)	3/8" (10 mm)

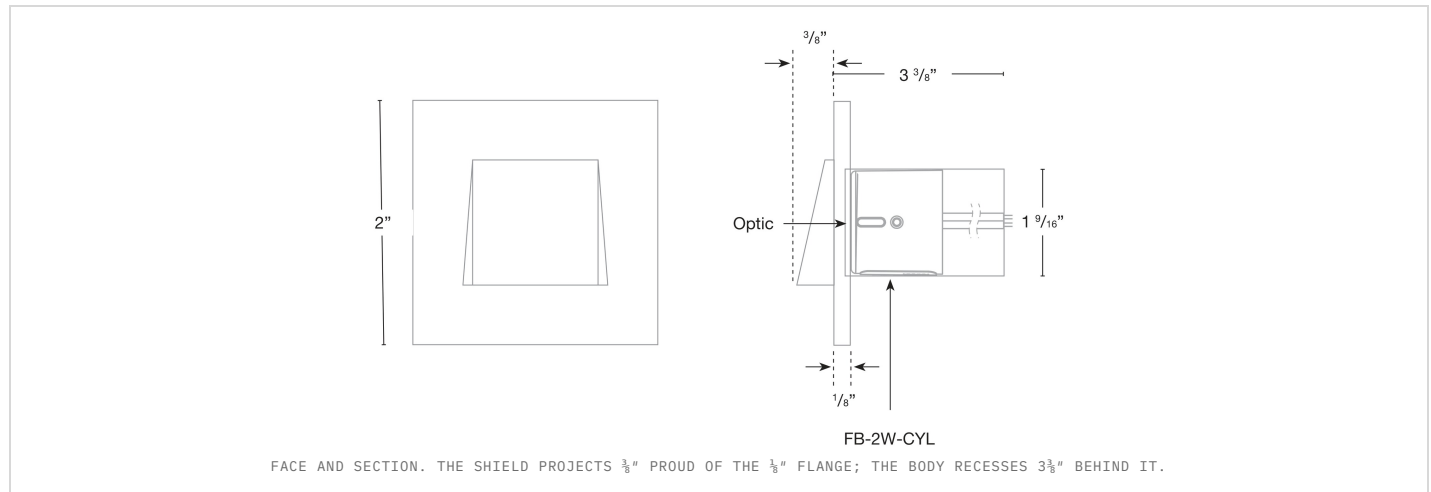

MOUNTING

Concrete Pour Sleeve

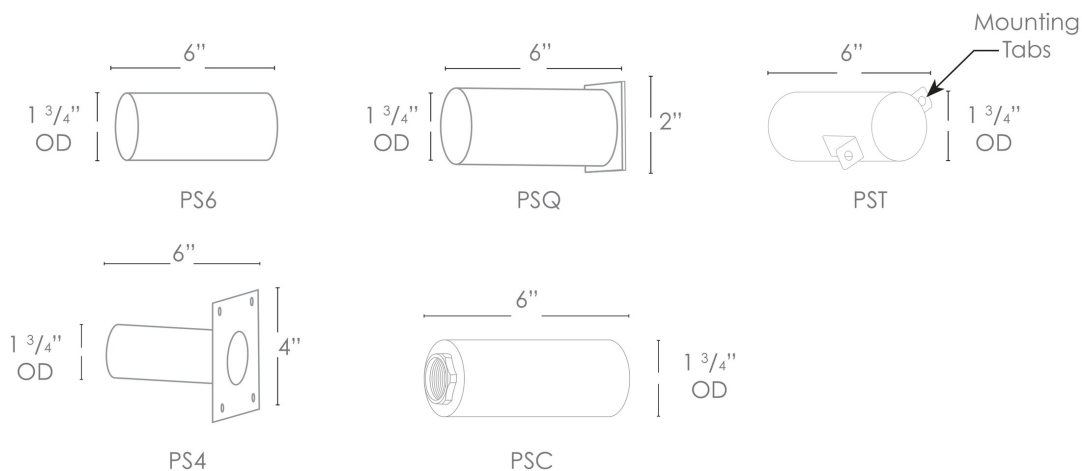

Recessed mounting — 1 3/4" OD rough-in. Concrete pour sleeves are optional, ordered in the Options column.