


ORIEL 214

Linear Light with 360 Illumination




Mesh Control

Mesh Control

- 6.66" (169 mm) height
- 2.14" (54.4 mm) width

FEATURES

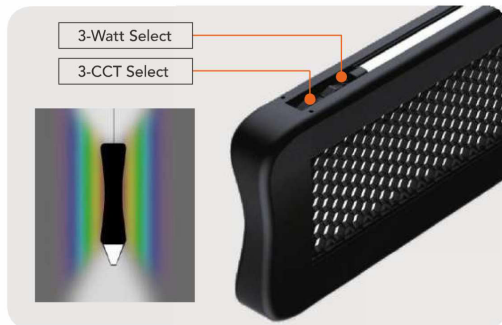

- 3-watt select
- 3-CCT select

ORDERING INFORMATION

SPECIFICATIONS



Switch Select
2,970 – 10,080 Lumens




CCT Select
2700K – 6500K + RGB



Wattage Select
33 – 112 Watts




ETL Listed — Intertek | 5 year warranty | Bluetooth mesh | RGB



Section

BEAM ANGLES

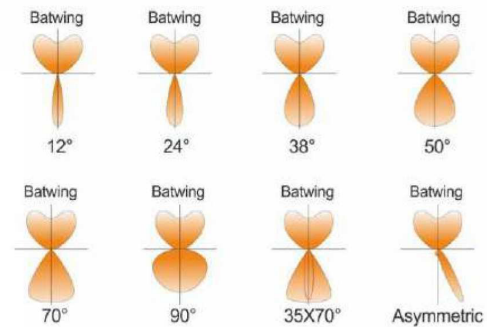

Batwing 12° / 24° / 38° / 50° / 70° / 90° / 35x70° / asymmetric

MODEL	LENGTH	WATTAGE	OUTPUT LUMEN (UP 18% / MIDDLE 28% / DOWN 54%)	NOMINAL EFFICACY	CCT	INPUT VOLTAGE	DIMMABLE	CRI
ORI-10LSUD4FT56WB2D1HV	4'	33W / 45W / 56W	2970 / 4050 / 5040 lm	90 lm/W	3000/3500/4000K	AC120-347V	0-10V (1%-100%)	>90
ORI-10LSUD8FT112WB2D1HV	8'	66W / 90W / 112W	5940 / 8100 / 10080 lm	90 lm/W	3000/3500/4000K	AC120-347V	0-10V (1%-100%)	>90
ORI-10LSUD4FT56WBHV (BLE)	4'	56W	4480 lm	80 lm/W	2700-6500K + RGB	AC120-347V	Mesh control	>90
ORI-10LSUD8FT112WBHV (BLE)	8'	112W	8960 lm	80 lm/W	2700-6500K + RGB	AC120-347V	Mesh control	>90