


Min Bending Diameter

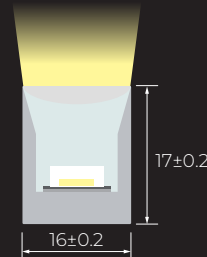

Cross Section(mm)

Cable Option

Integrated End Cap (IP67)



Front Entry (IF)



Side Entry (IS)



Bottom Entry (IB)




Closed End Cap (IEC)

Combined End Cap (IP67)




Front Entry (CF)



Side Entry (CS)




Bottom Entry (CB)




Closed End Cap (CEC)

Accessories

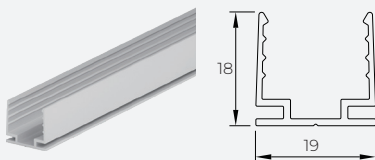

Aluminium Profile (AP)
(1m/2m/3m)



Aluminium Mounting Clips (AC)
(2cm)

Single Color

2835 N P V - 16x17mm 10W - 14024 - W/R/G/B/Y/O/P

2835 N P V - 16x17mm 10W - 12024(C) - W/R/G/B/Y/O/P

CCT		Power(W)	Efficiency (LM/W)	Lumen (LM/M)	Cutting Unit (mm)	Max. Run Length (M)
1800K	CV	10	60	600	50	7
	CC	10	48.7	487	50	15
2100K	CV	10	66.5	665	50	7
	CC	10	54.7	547	50	15
2400K	CV	10	73.9	739	50	7
	CC	10	59.3	593	50	15
2700K	CV	10	77.6	776	50	7
	CC	10	63.7	637	50	15
3000K	CV	10	79.7	797	50	7
	CC	10	66.4	664	50	15
3500K	CV	10	82.7	827	50	7
	CC	10	69	690	50	15
4000K	CV	10	82.5	825	50	7
	CC	10	69.9	699	50	15
5000K	CV	10	81.8	818	50	7
	CC	10	71.5	715	50	15
6500K	CV	10	83.1	831	50	7
	CC	10	70.2	702	50	15
Red	CV	10	30.7	307	50	10
	CC	10	29.1	291	50	22
Green	CV	10	78	780	50	7
	CC	10	67.6	676	50	14
Blue	CV	10	16.4	164	50	7
	CC	10	13.8	138	50	15
Yellow	CV	10	24.3	243	50	9
	CC	10	21.9	219	50	21
Orange	CV	10	28.5	285	50	9
	CC	10	25.7	257	50	20
Pink	CV	10	64	640	50	7
	CC	10	57.9	579	50	15

CCT Tunable

2835 N P V - 16x17mm 11W - 19624 - (27-65K)

CCT		Power(W)	Efficiency (LM/W)	Lumen (LM/M)	Cutting Unit (mm)	Max. Run Length (M)
2700K		10	78	780	71.4	5
6000K		10	83	830	71.4	5
2700K+6000K		11	84	924	71.4	5

RGB

5050 N P V - 16x17mm 10W - 8424 - RGB

CCT	Power(W)	Efficiency (LM/W)	Lumen (LM/M)	Cutting Unit (mm)	Max. Run Length (M)
R	3.3	21.9	72	83.3	5
G	3.3	78.8	260	83.3	5
B	3.3	13	43	83.3	5
RGB	10	38	380	83.3	5

RGBW

5028 N P V - 16x17mm 15W - 16824 - RGBW

CCT	Power(W)	Efficiency (LM/W)	Lumen (LM/M)	Cutting Unit (mm)	Max. Run Length (M)
R	3.75	22	83	83.3	5
G	3.75	81.6	306	83.3	5
B	3.75	14.4	54	83.3	5
W(3000K)	3.75	72.1	270	83.3	5
RGBW	15	49.9	749	83.3	5

RGBW Pixel

5060 N P V - 16x17mm 15W - 8024I - RGBW

CCT	Power(W)	Efficiency (LM/W)	Lumen (LM/M)	Cutting Unit (mm)	Max. Run Length (M)	Protocol
R	5	11.8	59	125	5	DMX512
G	5	37.7	189	125	5	
B	5	7.5	38	125	5	
W(4000K)	5	32	160	125	5	
RGBW	15	30	450	125	5	

Note: CV=Constant Voltage CC=Constant Current