



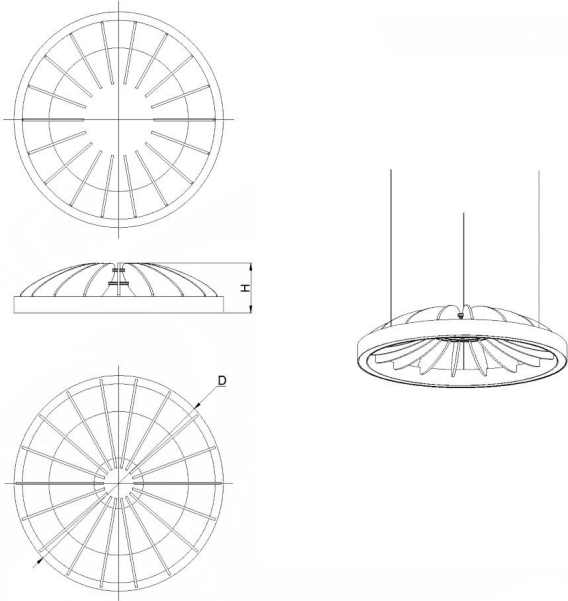


Series	ACOUSTIC FLOWER RING LIGHT SERIES	Model	FLOWER 3S/ FLOWER 5UDS/ FLOWER 25S/ FLOWER 26S						
		Project:							
		Type:							
		Notes:							
		Overview							
  		Features 1. The diameter size to choose from ranging from 2ft to 5ft. 2. 2 color finishes(black, white), can be customized. 3. Operation Voltage: AC120-277V, 0-10V dimming and non-dimmable for optional 4. Aluminum body construction 5. 36 acoustic felt colors 6. Efficiency: $\geq 70\text{lm/w}$							
Type	Suspended - Down	Size							
		Model No.	Dimension		Driver quantity	Section quantity	Dimension code	Direct Lumen/Watt	Indirect Lumen/Watt
			D	H					
		FLOWER 3-S-40W-ACFL	23.6"(600mm)	5.2"(132mm)	1	1	D24	2800/40W	/
		FLOWER 3-S-50W-ACFL	35.4"(900mm)	7.6"(192mm)	1	1	D35	3500/50W	/
		FLOWER 3-S-80W-ACFL	47.2"(1200mm)	9.8"(247mm)	2	1	D47	5600/80W	/
		FLOWER 3-S-100W-ACFL	59.1"(1500mm)	11.9"(303mm)	2	1	D59	7000/100W	/
		FLOWER 5-UDS-65W-ACFL	23.6"(600mm)	6.4"(162mm)	2	1	D24	2800/40W	1750/25W
		FLOWER 5-UDS-80W-ACFL	35.4"(900mm)	8.8"(222mm)	2	1	D35	3500/50W	2100/30W
		FLOWER 5-UDS-120W-ACFL	47.2"(1200mm)	11.0"(277mm)	3	1	D47	5600/80W	2800/40W
		FLOWER 5-UDS-135W-ACFL	59.1"(1500mm)	13.1"(333mm)	3	1	D59	6300/90W	3150/45W
		FLOWER 25-S-32W-ACFL	23.6"(600mm)	4.9"(126mm)	1	1	D24	2200/32W	/
		FLOWER 25-S-40W-ACFL	35.4"(900mm)	7.3"(186mm)	1	1	D35	2800/40W	/
		FLOWER 25-S-70W-ACFL	47.2"(1200mm)	9.5"(241mm)	2	1	D47	4900/70W	/
		FLOWER 25-S-80W-ACFL	59.1"(1500mm)	11.7"(297mm)	2	1	D59	5600/80W	/
		FLOWER 26-S-32W-ACFL	23.6"(600mm)	4.9"(126mm)	1	1	D24	2200/32W	/
		FLOWER 26-S-40W-ACFL	35.4"(900mm)	7.3"(186mm)	1	1	D35	2800/40W	/
FLOWER 26-S-70W-ACFL	47.2"(1200mm)	9.5"(241mm)	2	1	D47	4900/70W	/		
FLOWER 26-S-80W-ACFL	59.1"(1500mm)	11.7"(297mm)	2	1	D59	5600/80W	/		

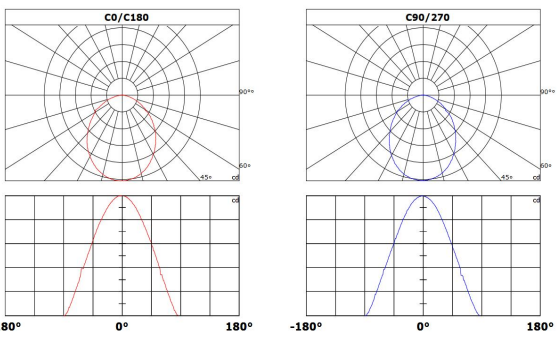
PRODUCT SPECIFICATION


Model No.	Installation		Power		Acoustic	CRI	CCT		Control		Body Color		Acoustic Color	Dimension code
	S	Suspended	40W	For size D23.6"	ACFL	80+	30K	3000K	STD	Non-dimming	SW	Matt white	Acoustic Color Code	D24
FLOWER 3 Direct Distribution			50W	For size D35.4"		90+	35K	3500K	DIM	0-10V dimming	SB	Matt black		D35
			80W	For size D47.2"			40K	4000K			RAL	Customized color		D47
			100W	For size D59.1"										D59
FLOWER 5 Direct/ Indirect Distribution	UDS	Suspended	65W	For size D23.6"	ACFL									D24
			80W	For size D35.4"										D35
			120W	For size D47.2"										D47
			135W	For size D59.1"										D59
FLOWER 25 Inner Distribution	S	Suspended	32W	For size D23.6"	ACFL									D24
			40W	For size D35.4"										D35
			70W	For size D47.2"										D47
			80W	For size D59.1"										D59
FLOWER 26 Outer Distribution	S	Suspended	32W	For size D23.6"	ACFL									D24
			40W	For size D35.4"										D35
			70W	For size D47.2"										D47
			80W	For size D59.1"										D59

Acoustic Color Code	 NSAC-001 141	 NSAC-002 122	 NSAC-003 120	 NSAC-004 123	 NSAC-025 138	 NSAC-031 108	 NSAC-056 131	 NSAC-024 117
	 NSAC-005 107	 NSAC-006 106	 NSAC-007 145	 NSAC-008 129	 NSAC-042 146	 NSAC-043 115	 NSAC-055 142	 NSAC-028 110
	 NSAC-009 140	 NSAC-019 126	 NSAC-011 135	 NSAC-012 133	 NSAC-033 103	 NSAC-034 102	 NSAC-035 101	 NSAC-036 105
	 NSAC-013 111	 NSAC-014 144	 NSAC-021 130	 NSAC-016 104	 NSAC-038 127	 NSAC-039 143	 NSAC-040 124	 NSAC-057 132
	 NSAC-017 147	 NSAC-018 125	 NSAC-022 119	 NSAC-020 128				

Order Example: FLOWER 3-S-40W-ACFL-90-30K-DIM--SW-NSAC-001 141-D24

PRODUCT SPECIFICATION

Light distribution	Optical system																																																			
	<table border="1" style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th>Height</th> <th>Center h</th> <th>Diameter</th> </tr> </thead> <tbody> <tr><td>1 m</td><td>3254.54 in</td><td>338.36cm</td></tr> <tr><td>2 m</td><td>813.64 in</td><td>678.36cm</td></tr> <tr><td>3 m</td><td>361.62 in</td><td>1014.54cm</td></tr> <tr><td>4 m</td><td>203.41 in</td><td>1352.73cm</td></tr> <tr><td>5 m</td><td>130.18 in</td><td>1690.91cm</td></tr> <tr><td>6 m</td><td>90.40 in</td><td>2029.09cm</td></tr> <tr><td>7 m</td><td>66.42 in</td><td>2367.27cm</td></tr> <tr><td>8 m</td><td>50.85 in</td><td>2705.45cm</td></tr> <tr><td>9 m</td><td>40.18 in</td><td>3043.63cm</td></tr> <tr><td>10 m</td><td>32.55 in</td><td>3381.82cm</td></tr> <tr><td>11 m</td><td>26.90 in</td><td>3720.00cm</td></tr> <tr><td>12 m</td><td>22.60 in</td><td>4058.18cm</td></tr> <tr><td>13 m</td><td>19.25 in</td><td>4396.36cm</td></tr> <tr><td>14 m</td><td>16.60 in</td><td>4734.54cm</td></tr> <tr><td>15 m</td><td>14.46 in</td><td>5072.72cm</td></tr> <tr><td>16 m</td><td>12.71 in</td><td>5410.91cm</td></tr> </tbody> </table> <p style="text-align: center;">Beam Angle: 118.80°(50%Imax)</p>	Height	Center h	Diameter	1 m	3254.54 in	338.36cm	2 m	813.64 in	678.36cm	3 m	361.62 in	1014.54cm	4 m	203.41 in	1352.73cm	5 m	130.18 in	1690.91cm	6 m	90.40 in	2029.09cm	7 m	66.42 in	2367.27cm	8 m	50.85 in	2705.45cm	9 m	40.18 in	3043.63cm	10 m	32.55 in	3381.82cm	11 m	26.90 in	3720.00cm	12 m	22.60 in	4058.18cm	13 m	19.25 in	4396.36cm	14 m	16.60 in	4734.54cm	15 m	14.46 in	5072.72cm	16 m	12.71 in	5410.91cm
Height	Center h	Diameter																																																		
1 m	3254.54 in	338.36cm																																																		
2 m	813.64 in	678.36cm																																																		
3 m	361.62 in	1014.54cm																																																		
4 m	203.41 in	1352.73cm																																																		
5 m	130.18 in	1690.91cm																																																		
6 m	90.40 in	2029.09cm																																																		
7 m	66.42 in	2367.27cm																																																		
8 m	50.85 in	2705.45cm																																																		
9 m	40.18 in	3043.63cm																																																		
10 m	32.55 in	3381.82cm																																																		
11 m	26.90 in	3720.00cm																																																		
12 m	22.60 in	4058.18cm																																																		
13 m	19.25 in	4396.36cm																																																		
14 m	16.60 in	4734.54cm																																																		
15 m	14.46 in	5072.72cm																																																		
16 m	12.71 in	5410.91cm																																																		

Accessories
<div style="display: flex; align-items: flex-start;"> <div style="border: 1px solid black; padding: 5px; margin-right: 20px;"> <p>A.Mounting Bracket B.Anchor Screws C.Plastic Anchors D.Bracket Screws E.Canopy Screws F.Wire Connectors</p> </div>  </div>

Material	LED system																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">LED Driver</td> <td>ARCATA or Equivalent, AC120-277V, PF>0.9, no flicker, UL Cert, Class P</td> </tr> <tr> <td>Alu PCB</td> <td>2.0W/M/K, UL Cert</td> </tr> <tr> <td>Housing</td> <td>Alumium6063, painting.</td> </tr> <tr> <td>Lens</td> <td>PC, UL-94VO, Anti-UV</td> </tr> </table>	LED Driver	ARCATA or Equivalent, AC120-277V, PF>0.9, no flicker, UL Cert, Class P	Alu PCB	2.0W/M/K, UL Cert	Housing	Alumium6063, painting.	Lens	PC, UL-94VO, Anti-UV	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">LED</td> <td>Samsung 2835, 3V, 150mA</td> </tr> <tr> <td>CCT</td> <td>2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 6-step MacAdam ellipse)</td> </tr> <tr> <td>Led life</td> <td>Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.</td> </tr> <tr> <td>Operation temp</td> <td>minus 20C to 40C (centigrade)</td> </tr> <tr> <td>File name</td> <td>NS/SS-LL0113-ACFL REV1.0</td> </tr> </table>	LED	Samsung 2835, 3V, 150mA	CCT	2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 6-step MacAdam ellipse)	Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.	Operation temp	minus 20C to 40C (centigrade)	File name	NS/SS-LL0113-ACFL REV1.0
LED Driver	ARCATA or Equivalent, AC120-277V, PF>0.9, no flicker, UL Cert, Class P																		
Alu PCB	2.0W/M/K, UL Cert																		
Housing	Alumium6063, painting.																		
Lens	PC, UL-94VO, Anti-UV																		
LED	Samsung 2835, 3V, 150mA																		
CCT	2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 6-step MacAdam ellipse)																		
Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.																		
Operation temp	minus 20C to 40C (centigrade)																		
File name	NS/SS-LL0113-ACFL REV1.0																		
<p>CIP Lighting reserves the right to make any design changes for continuous improvement without notification, contact us for the latest technical information!</p>																			