Oda

Shielded Recessed Step Light

A compact 2″ square recessed step light in solid brass with an integrated shield to reduce glare and direct view of the source. Designed for walls, risers, and hardscape applications, with CCT options from 2200K to 6500K, plus RGBW and a turtle-friendly Amber option for wildlife-sensitive applications.

- Solid brass body with an integral shield — 2″ square face, ⅜″ shield projection, 3⅜″ behind the wall
- Shielded aperture cuts direct view of the source — for glare-sensitive and wildlife-ordinance sites
- Four beam angles — 19° spot · 38° flood · 54° wide flood · 120° wide angle flood
- Three outputs — 2W / 3W / 6W at 200 / 300 / 400 lm
- Eight colors — 2200K to 6500K, RGBW, and Amber (TF)
- Fourteen finishes — nine brass and patina, five PVD Premium



cULus | Wet Location | Made in USA

LUMEN OUTPUT	200 / 300 / 400 lm (by wattage)
COLOR TEMP / CCT	2200K / 2700K / 3000K / 4000K / 5000K / 6500K · Amber (TF) · RGBW
BEAM ANGLE	19° spot · 38° flood · 54° wide flood · 120° wide angle flood
WATTAGE	2W / 3W / 6W
VOLTAGE	120V AC or 12–15V DC

FINISH	Matte Bronze, Verde, Moss, Black, Rusty, Satin Brass, Aged Brass, Raw Copper, Natural Copper
MATERIAL	Solid brass
LENS	Tempered glass — clear or frosted
MOUNTING	Recessed — 1¾″ OD rough-in or concrete pour sleeve

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	LENS	OPTIONS	FINISH
ODA	2 2W 3 3W 6 6W	AC120 120V AC LVDC 12–15V DC	22 2200K 27 2700K 30 3000K 40 4000K 50 5000K 65 6500K AM Amber (TF) RGBW	19 19° spot 38 38° flood 54 54° wide flood 120 120° wide angle flood	CA Clear FA Frosted	N None PS6 Pour sleeve PSQ Pour sleeve, flanged PS4 Pour sleeve, plate PST Pour sleeve, tabs PSC Pour sleeve, threaded	MBZ VD MO BK RU SB AGB RC NC PVDP PVDS PVDG PVDZ PVDK

Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	BEAM	LENS	OPTIONS	FINISH
ODA	2	AC120	27	120	CA	PS6	PVDS

STANDARD FINISHES



MBZ
Matte Bronze




VD
Verde



MO
Moss



BK
Black



RU
Rusty



SB
Satin Brass




AGB
Aged Brass

RC
Raw Copper



NC
Natural Copper

PVD PREMIUM FINISHES



PVDP
PVD Polished



PVDS
PVD Satin



PVDG
PVD Graphite




PVDZ
PVD Bronze



PVDK
PVD Black

DIMENSIONS


MODEL	FACE (W × H)	DEPTH BEHIND FACE	BODY HEIGHT	FLANGE	SHIELD PROJECTION
ODA	2″ × 2″ (51 × 51 mm)	3 3/8″ (86 mm)	1 9/16″ (40 mm)	1/8″ (3 mm)	3/8″ (10 mm)

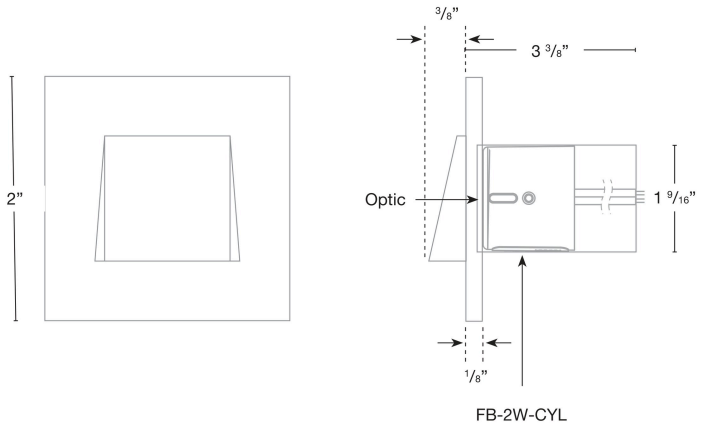

FB-2W-CYL

FACE AND SECTION. THE SHIELD PROJECTS ⅜″ PROUD OF THE ⅛″ FLANGE; THE BODY RECESSES 3⅜″ BEHIND IT.

MOUNTING

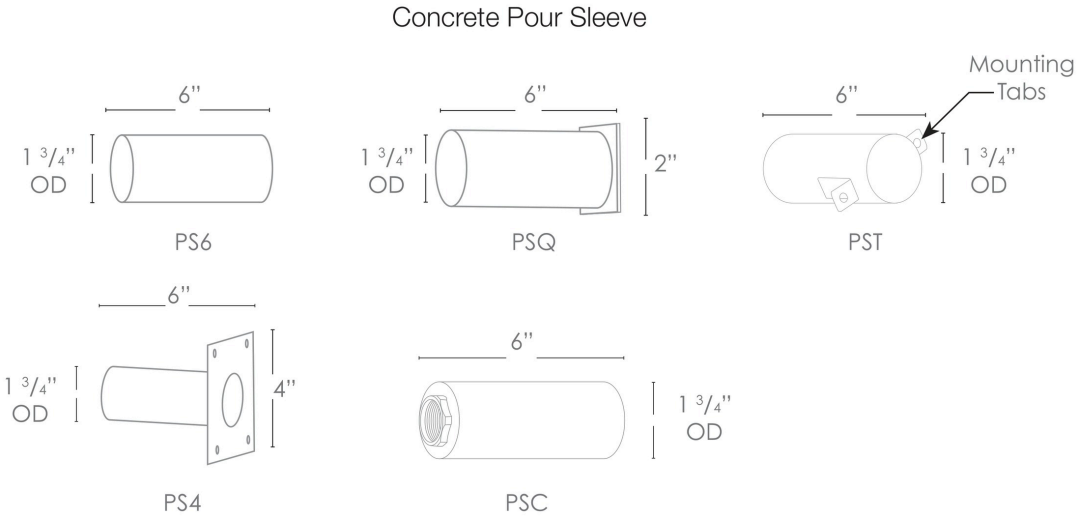

Recessed mounting — 1¾″ OD rough-in. Concrete pour sleeves are optional, ordered in the Options column.