

INTRODUCTION

FEATURE

Walk-over Trimless Recessed Lighting
Low-Glare Uniform Soft Lighting
Long Lifespan >50,000hours
Working Temperature: -30℃~50℃

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Aluminum Radiator Housing
Diffuser: Frosted Tempered Glass Diffuser
Fittings: Aluminum Profile Sleeve
Pre-wired: 0.3meters 2C18AWG Power Cable

INSTALLATION

Suitable for Inground lighting and underwater lighting, Like Pool, Sidewalk
Maximum Diving Depth: 5meters
Maximum Bearing Weight: 2500kgs
[FRG] Ground or Wall Recessed
Notes: Sleeve need to be Pre-buried Advance.



STANDARD

Designed and Manufactured to Comply with
CE/RoHS/cETL/SAA/SASO.....
IP68 and IK10 Protection, Class III Electric


CUSTOM OPTION

LED CCT: 1,800K~10,000K/R/G/B/Y
[CRI]: [E] RA80, [G] RA90, [H] RA97
[PCW-FM]: Female&Male Waterproof Connector

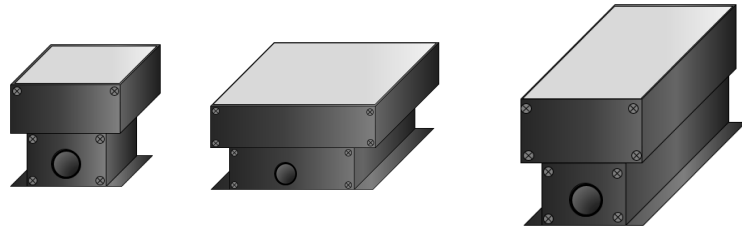GTG8601A: LED INGROUND PAVING BRICK





















(MRA100L1000)



MODEL	POWER [W]	LED TYPE	CCT [K]		CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT [V]				
GTG8601A-MSA100A	6W [3W]	24x0.5W SMD2835	G2700K		RA90	370	>0.9	[Frosted] BDF:120°		CV DC24V [CV DC12V] [CV DC42V]				
			G3000K		RA90	400								
			G3500K		RA90	400								
			G4000K		RA90	420								
			G5000K		RA90	420								
			G6500K		RA90	410								
	2C@6W	TWG	G2700K	G6500K	RA90	370	>0.9		[+CDP]:PWM(1%) [CDX]:DMX512(1%)					
4C@6W	RGBW	620nm 520nm 460nm 2700K	/	370	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									
GTG8601A-MSA200A MRA152L305A	20W [12W] [6W]	96x0.5W SMD2835	G2700K		RA90	1240	>0.9		[Frosted] BDF:120°			Following by Remote Driver		
			G3000K		RA90	1320								
			G3500K		RA90	1320								
			G4000K		RA90	1400								
			G5000K		RA90	1400								
			G6500K		RA90	1380								
	2C@20W	TWG	G2700K	G6500K	RA90	1240	>0.9				[CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDA]:DALI(1%) [CDX]:DMX512(1%) [CRZ]:ZIGBEE(1%) [CRF]:2.4G RF(1%) [CRB]:Bluetooth(1%) [CDS]:SPI(1%)			
4C@20W	RGBW	620nm 520nm 460nm 2700K	/	1240	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									
GTG8601A-MRA100L200A	12W [6W] [3W]	48x0.5W SMD2835	G2700K		RA90	750	>0.9				[Frosted] BDF:120°			Following [Remote DRIVER]
			G3000K		RA90	790								
			G3500K		RA90	790								
			G4000K		RA90	840								
			G5000K		RA90	840								
			G6500K		RA90	830								
	2C@12W	TWG	G2700K	G6500K	RA90	750	>0.9	[AC100~277V] [AC100~240V] [AC100~347V] [AC180~528V] 50/60Hz						
4C@12W	RGBW	620nm 520nm 460nm 2700K	/	750	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									
GTG8601A-MSA305A MSA400A MRA100L500A MRA152L458A	30W [20W] [12W]	120x0.5W SMD2835	G2700K		RA90	1870	>0.9	[Frosted] BDF:120°					Following [Remote Sensor]	
			G3000K		RA90	1980								
			G3500K		RA90	1980								
			G4000K		RA90	2100								
			G5000K		RA90	2100								
			G6500K		RA90	2060								
	2C@30W	TWG	G2700K	G6500K	RA90	1870	>0.9		[CSL]: Photocell Lux Sensor [CSM]: Micro Motion Sensor [CSMD]: Bi-level Microwave Motion Sensor					
4C@30W	RGBW	620nm 520nm 460nm 2700K	/	1870	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									
GTG8601A-MRA152L610A	40W [30W] [20W] [12W]	240x0.5W SMD2835	G2700K		RA90	2480	>0.9		[Frosted] BDF:120°					
			G3000K		RA90	2640								
			G3500K		RA90	2640								
			G4000K		RA90	2800								
			G5000K		RA90	2800								
			G6500K		RA90	2760								
	2C@60W	TWG	G2700K	G6500K	RA90	2480	>0.9							
4C@60W	RGBW	620nm 520nm 460nm 2700K	/	2480	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									
GTG8601A-MSA458A MSA610A MRA100L1000A MRA152L915A	60W [40W] [30W] [20W] [12W]	240x0.5W SMD2835	G2700K		RA90	3730	>0.9			[Frosted] BDF:120°				
			G3000K		RA90	3970								
			G3500K		RA90	3970								
			G4000K		RA90	4200								
			G5000K		RA90	4200								
			G6500K		RA90	4130								
	2C@60W	TWG	G2700K	G6500K	RA90	3730	>0.9							
4C@60W	RGBW	620nm 520nm 460nm 2700K	/	3730	>0.9									
4C@6W	RGBTW	620nm 520nm 460nm 2700K 6500K	/	370	>0.9									

NOTE:

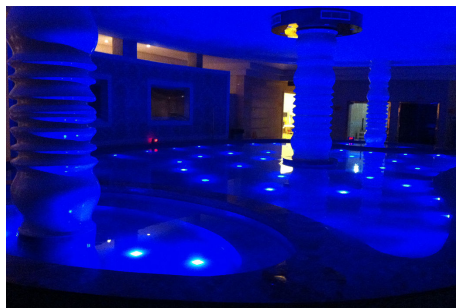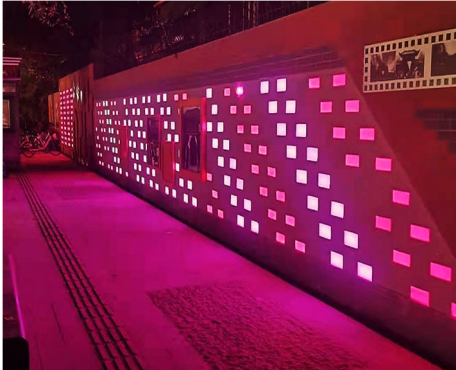All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.


[FRG] Inground or Wall Recessed Light		DIMENSION: [UNIT: MM]		
NOTES:	Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.			
(MSA100A)-[FRG]				
				
(MSA200A)-[FRG]				
				
(MSA305A)-[FRG]				
				
(MSA400A)-[FRG]				
				
(MSA458A)-[FRG]				
				
(MSA610A)-[FRG]				
				
				

[FRG] Inground or Wall Recessed Light


DIMENSION: [UNIT: MM]

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

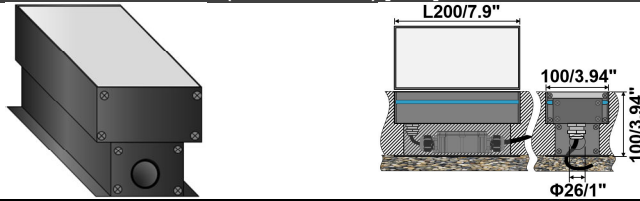
(MRA100L200A)-[FRG]




(MRA100L500A)-[FRG]

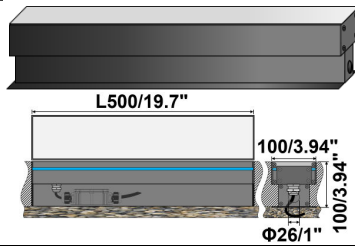


(MRA100L1000A)-[FRG]

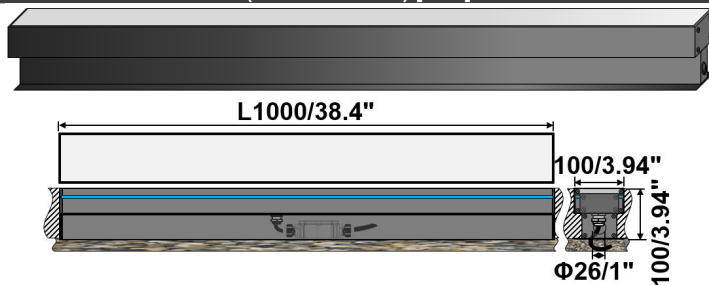


(MRA152L305A)-[FRG]

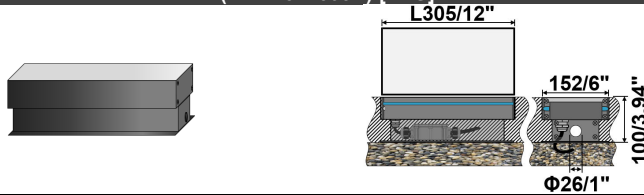

(MRA152L458A)-[FRG]

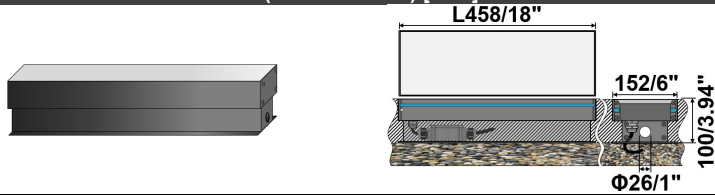

(MRA152L610A)-[FRG]

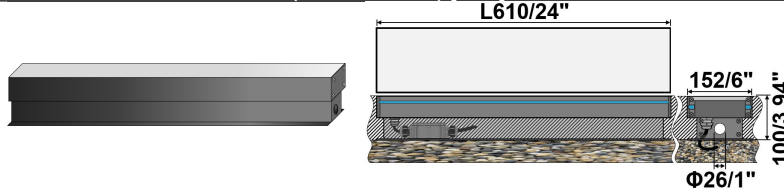

(MRA152L915A)-[FRG]

