Vela

Universal Step Light

A universal 2W step light that mounts either vertically or horizontally in a standard 2″ × 4″ junction box, so one fixture covers both orientations on a job. Field-selectable across five color temperatures and dimmable to 5%.

- Mounts vertically OR horizontally in a standard 2″ × 4″ J-box
- 2W · 125 delivered lumens · 90+ CRI
- 5CCT selectable — 2700 / 3000 / 3500 / 4100 / 5000K
- Dimmable down to 5%
- 120V · 50,000-hour rated life
- 18 per pack



cETLus | FCC | IP65 | Wet Location | Air Tight

LUMEN OUTPUT	125 lm
COLOR TEMP / CCT	5CCT — 2700 / 3000 / 3500 / 4100 / 5000K
CRI	90+ (Ra)
WATTAGE	2W
VOLTAGE	120V AC
DIMMING	Dimmable to 5%

FINISH	White
IP / IMPACT	IP65
MOUNTING	Vertical or horizontal in a standard 2″ × 4″ junction box
DIMENSIONS	4.50″ H × 2.75″ W
LIFETIME	50,000 hours
WARRANTY	3-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.

MODEL	WATTAGE	VOLTAGE	CCT	FINISH
VELA	2 2W	AC120 120V	5CCT (2700/3000/3500/4100/5000K)	WH White

Build Your Order Code — example values shown in grey


MODEL		WATTAGE		VOLTAGE		CCT		FINISH
VELA	–	2	–	AC120	–	5CCT	–	WH

FINISHES

WH
White

DIMENSIONS

MEASUREMENT	VALUE
Height	4.50″ (114.3 mm)
Width	2.75″ (69.85 mm)
Depth	2.75″ (69.85 mm) overall
J-box	Standard 2″ × 4″
Pack quantity	18

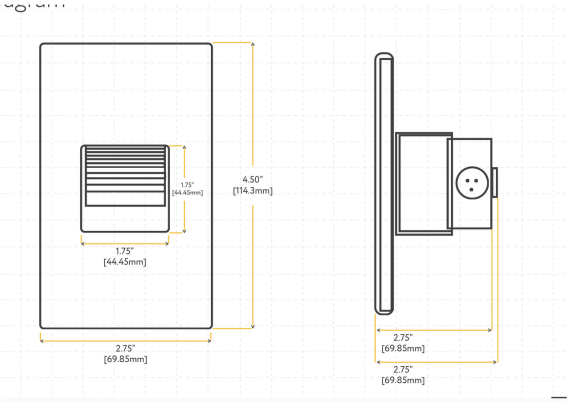

FRONT AND SIDE VIEWS — 4.50″ H × 2.75″ W TRIM, 2.75″ DEEP OVERALL; 1.75″ SQUARE LOUVER.

PERFORMANCE DATA

COMPATIBLE DIMMERS

BRAND	SERIES	MODEL	LOAD
Lutron	Ariadni	AYCL-153P	150W
	Diva	DV-600PR	600W
	Diva	DVCL-153P	150W
	Maestro	MACL-153MH	600W
	Maestro Wireless	MRF2-6CL	150W
	Rotary	D-600P	600W
	Electronic	NTELV-300P	600W
	Skylark	S-600P	600W
	Skylark Contour	CT-600P	600W
	Skylark Contour	CLCL-153P	153W
	Toggler	TG-600P	600W
	Toggler	TGCL-153P	150W
	Caseta	Wireless dimmer	150W
Leviton	SureSlide	6633	600W
	SureSlide Decora	6674	600W
	Trimatron	6602	600W
	Illumatech	IPL06	600W
Legrand	Adorne	ADTP703TU	700W
	Harmony	H703PTW	700W
Cooper	Aspire	9540	1000W
	Devine	DAL06P	300W

The factory's dimmer list; every model is rated OK for dimming.