

GUSTAV

Full Cut-Off LED Wall Pack

A full cut-off, dark-sky wall pack from 25W to 150W with no uplight, in Type III or Type IV distribution. For parking lots, facility plants, residential areas and emergency egress. Ordered at a fixed wattage and colour temperature.

- 25 / 50 / 80 / 100 / 120 / 150W
- Full cut-off — dark sky, no uplight
- Type III or Type IV distribution
- CCT ordered as 3000K, 4000K, 5000K or 6000K
- Daylight sensor, motion sensor and remote controller options
- ADC12 die-cast aluminium · IP65 · 50,000 hr rated life



UL

DLC

IP65

EFFICACY	130 lm/W
COLOR TEMP / CCT	3000K / 4000K / 5000K / 6000K
CRI	70+ (Ra)
DISTRIBUTION	Type III · Type IV · full cut-off
LED SOURCE	Philips SMD 3030 (or equivalent)
WATTAGE	25 / 50 / 80 / 100 / 120 / 150W
VOLTAGE	100–277V · 120–347V · 180–480V
POWER FACTOR	≥0.95 · THD <20%

DRIVER	Meanwell / SOSEN (or equivalent)
FINISH	Dark Bronze, Black, Gray, White
OPERATING TEMP	–40°C to 45°C (–40°F to 113°F)
IP / IMPACT	IP65
MATERIAL	Aluminium alloy · PC optic lens
DIMENSIONS	11.6 × 3.54 × 8.5" (25–100W) · 14.25 × 4.41 × 10.08" (120/150W)
LIFETIME	50,000 hrs
WARRANTY	5-Year Limited

ORDERING

CONFIGURE YOUR PART NUMBER USING THE OPTIONS BELOW.


● **In stock** — all other configurations built to order.

MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	CONTROLS	FINISH
GUSTAV	● 25 25W ● 50 50W ● 80 80W ● 100 100W 120 120W 150 150W	● U 100-277V M 120-347V H 180-480V	30 3000K 40 4000K ● 50 5000K 60 6000K	● T3 Type III T4 Type IV	● N None DS Daylight Sensor MS Motion Sensor	● DBZ Dark Bronze BK Black GY Gray WH White

Build Your Order Code — example values shown in grey

MODEL	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	CONTROLS	FINISH
GUSTAV	100	U	50	T3	N	DBZ

STANDARD FINISHES

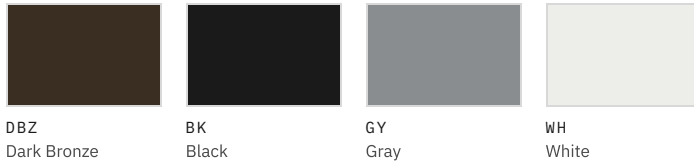

DIMENSIONS & WEIGHT

WATTAGE	DIMENSIONS (W × D × H)	NET WEIGHT
25 / 50 / 80 / 100W	11.6 × 3.54 × 8.5" (295 × 90 × 216 mm)	4.63 – 5.29 lbs
120 / 150W	14.25 × 4.41 × 10.08" (362 × 112 × 256 mm)	6.17 – 6.83 lbs

OPTIONS

CONTROLS

DS Daylight sensor


MS Motion sensor

N None

ACCESSORIES (SOLD SEPARATELY)

RC Remote controller

PHOTOMETRY



Type III Distribution

IES FILE


Available on request

MAX CANDELA

—

L70 / LIFETIME

50,000 hrs



Type IV Distribution

BEAM /
DISTRIBUTION

Type III · Type IV · full cut-off

EFFICACY

130 lm/W

PHOTOBIOLOGICAL

RG-1 (Low Risk) per IEC 62471