

CIP-KYS 1 Tier

PRODUCT DESCRIPTION

Experience the pinnacle of customizable lighting with KYS's Kelvin Temperature Selectable Circular Pendants. Crafted from extruded aluminum with glare-free flash lens and adjustable aircraft cables, these pendants range from 15.57" to 70.87", allowing for endless design possibilities. With tunable white and RGBW options, over 6500 powder-coated colors, and effortless assembly, these pendants seamlessly blend innovation with sophistication, offering versatile solutions for modern spaces. Shipped assembled for convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.


SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.



PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



Selectable CCT







MODEL INFORMATION:

Example: CIP-D101A-20W-S-B

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable			
*CIP-KYS-D101A CIP-KYS-D101B CIP-KYS-D101C CIP-KYS-D101D CIP-KYS-D101E CIP-KYS-D101F	20W=15.75"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)			
	30W=23.62"				5'=5 foot 60"			
	40W = 31.50"		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	S=Platinum Silver	15'=15 foot 180"		
	50W = 39.37"	20'=20 foot 240"						
	60W = 47.24"	T=3K-4K Tunable White control by remote/wall control	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	25'=25 foot 300"			
	70W = 59.06"					C=Dali	O=Oil Rubbed Bronze	30'=30 foot 360"
	80W = 70.87"					R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	
		R4=RGB+4000K						
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>								


STANDARD COLOR FINISHES



LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
CIP-D101A/B/C/D/E/F	15.75"	20W	2700K/3500K/4000K or 3000K/3500K/4000K	1200 lm
	23.62"	30W	2700K/3500K/4000K or 3000K/3500K/4000K	1800 lm
	31.50"	40W	2700K/3500K/4000K or 3000K/3500K/4000K	2400 lm
	39.37"	50W	2700K/3500K/4000K or 3000K/3500K/4000K	3000 lm
	47.24"	60W	2700K/3500K/4000K or 3000K/3500K/4000K	3600 lm
	59.06"	70W	2700K/3500K/4000K or 3000K/3500K/4000K	4200 lm
	70.87"	80W	2700K/3500K/4000K or 3000K/3500K/4000K	4800 lm

EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	CIP-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	CIP-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	CIP-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL





Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.







PHOTOMETRIC: Direct Illumination





CIP-D101A20WSZ 15.75" 20W @ 4000K

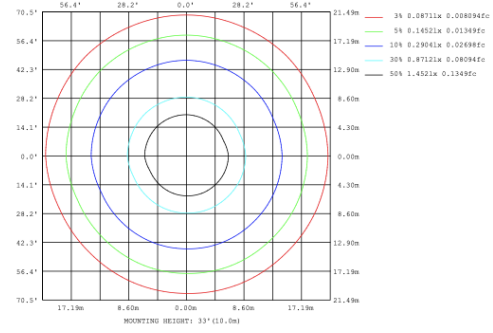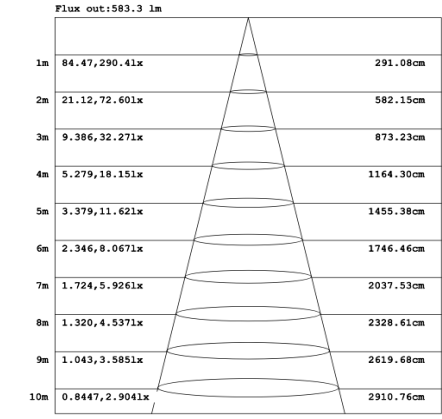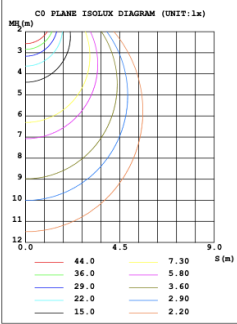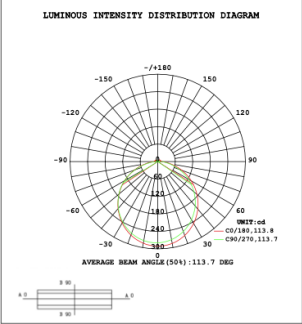




CIP-D101A30WSZ 23.62" 30W @ 4000K

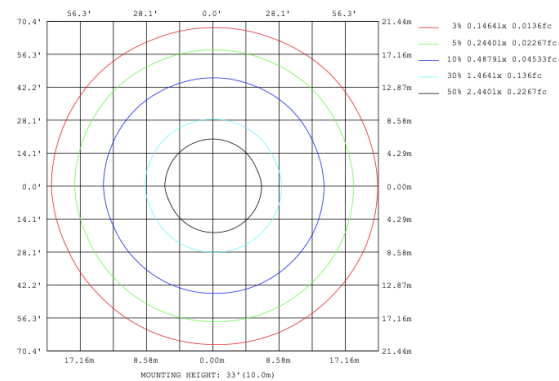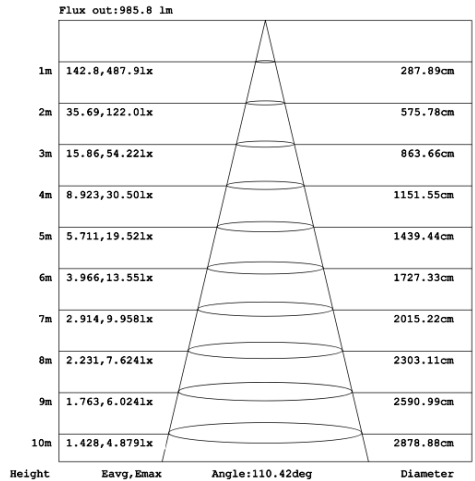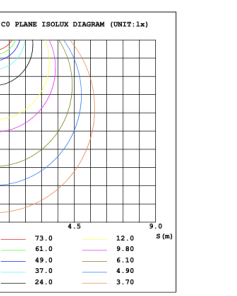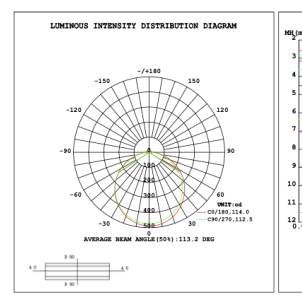




CIP-D101A40WSZ 31.50" 40W @ 4000K

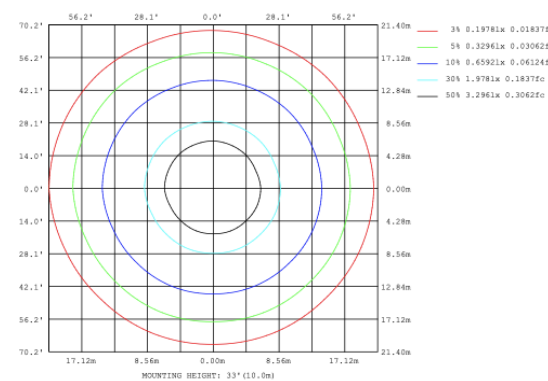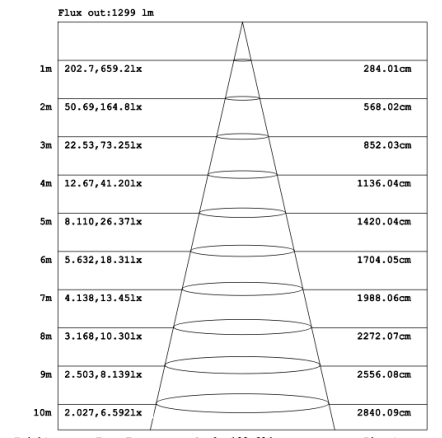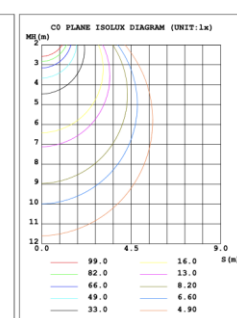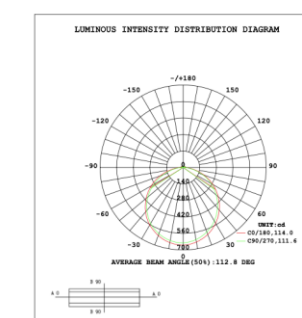




CIP-D101A50WSZ 39.37" 50W @ 4000K

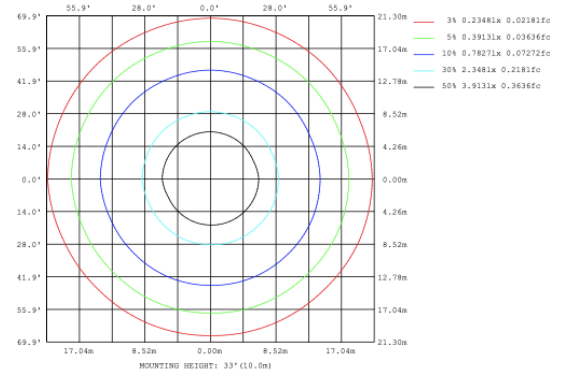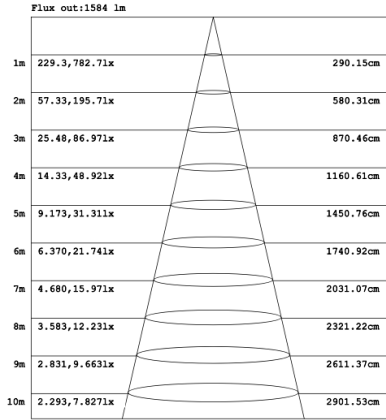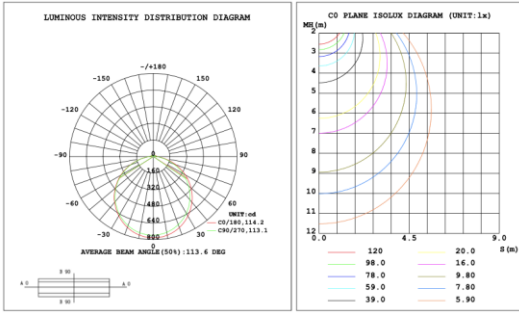




CIP-D101A60WSZ 47.24" 60W @ 4000K

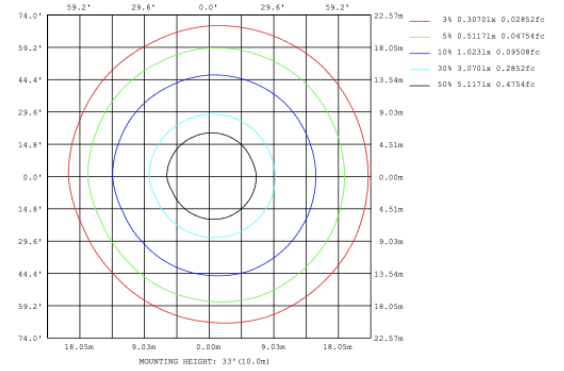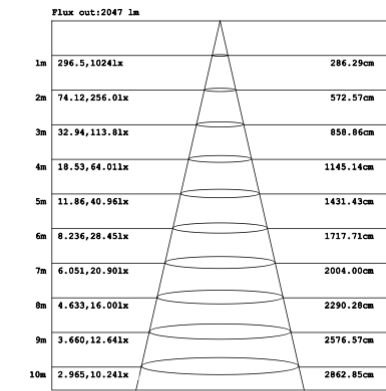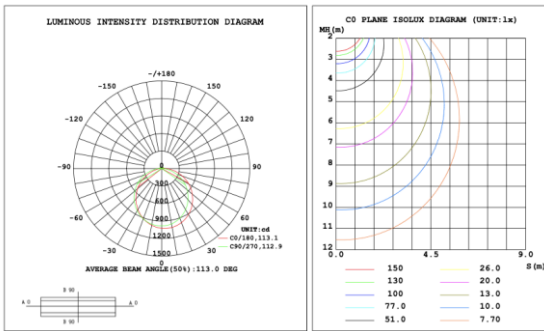

CIP-D101A70WSZ 59.06" 70W @ 4000K

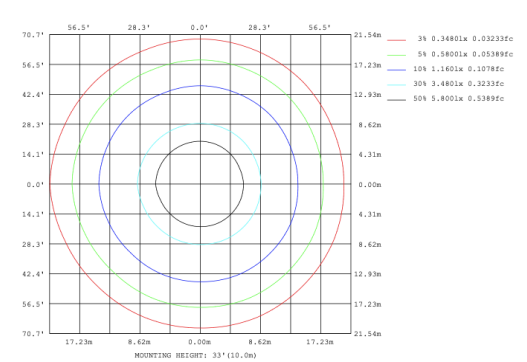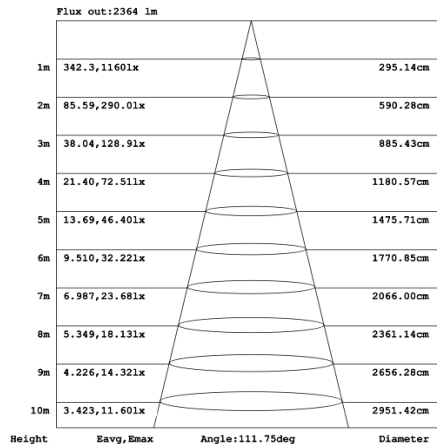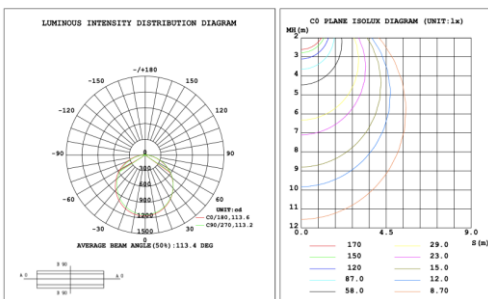

CIP-D101A80WSZ 70.87" 80W @ 4000K

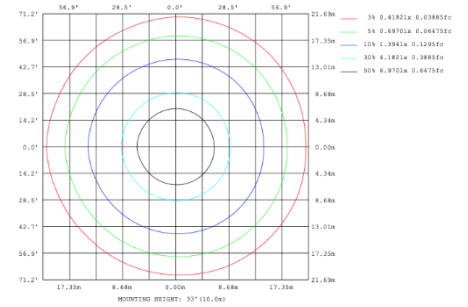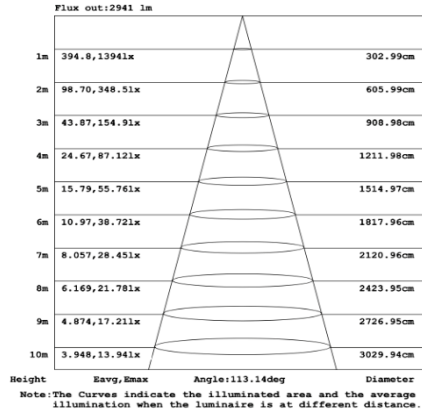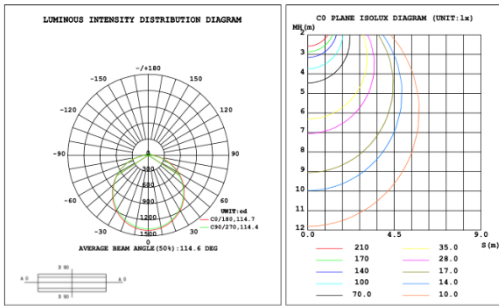

Alternative Ring Quantity Options: (1/2/3/4/5/6)

