




ANDERS RD: ROUND LED GARDEN LIGHT



[MTF] Flat Top [FFS]	[MTF] Flat Top [PSA]	[MTD] Dome Top [PSA]	[MTT] Tilt Top [PSA]
----------------------------	----------------------------	----------------------------	----------------------------



[FWA]



INTRODUCTION

FEATURE

Custom Modular Make Pleasantly Garden Lighting
Suitable for Flexible and Diverse Garden Style.
Custom Fixing Meet Various Installation Smoothly
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: GUBO
Driver Brand: GUBO
Housing: Aluminum Profile
Optics: Nano Opal PCB Reflecting
Diffuser: Clear Glass Diffuser

INSTALLATION

Suitable for Garden, Park, Plaza.....

[FFS]: Flush Surface Mounted

[FPS]: Stem Pendant

[FPC]: Catenary Pendant

[FWA]: Wall Surface Mounted

[FWH]: Wall Surface Mounted UpDown Lighting

[FSC]: Slip Fitter Mounted

[FJP]: Fixing Plate on JBOX/Outlet Box

[PSA]: Aluminum Straight Bollard

NOTES: Custom Installation and Accessories
Referred to Another Catalogue of Fixing Kits.

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/TUV/CB/cETL/SAA Standard
IP65 Protection, Class I Electric

CUSTOM OPTION

LED CCT: 1,600K~10,000K/R/G/B/Y

[CRI]: [E] RA80, [G] RA90, [H] RA97(RG0)

[WM40C]: Working Temperature -40°C~50°C

[SFH]: Custom Housing Finish by RAL Code

WHITE	BLACK	DARK GREY	GREY	PEARL GREY
RAL9010P	RAL9005P	RAL7016P	RAL7043P	RAL9022P

[BC] COLUMN









CUSTOM QUANTITY & LENGTH

[BC2C180D]

BC3C120D

BC4C90D

BC6C60D



SPECIFICATION

ANDERS RD: ROUND LED GAREN LIGHT

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT [V]
 ANDERS RD-MCA125A1N	20W [12W]	96x0.5W SMD2835	G2200K	RA90	1240	>0.9			
			G2500K	RA90	1380				
			G2700K	RA90	1450				
			G3000K	RA90	1540				
			G3500K	RA90	1540				
			G4000K	RA90	1630				
			G5000K	RA90	1630				
	2C@20W	TWG	G2700K	G6500K	RA90	1450	>0.9		
4C@20W	RGBW	620nm 520nm 465nm G2700K	\	1450	>0.9				
 ANDERS RD-MCA125B1N	30W [20W] [12W]	120x0.5W SMD2835	G2200K	RA90	1740	>0.9			
			G2500K	RA90	1930				
			G2700K	RA90	2030				
			G3000K	RA90	2160				
			G3500K	RA90	2160				
			G4000K	RA90	2290				
			G5000K	RA90	2290				
	2C@30W	TWG	G2700K	G6500K	RA90	2030	>0.9		
4C@30W	RGBW	620nm 520nm 465nm G2700K	\	2030	>0.9				
 ANDERS RD-MCA200A1N	40W [30W] [20W]	144x0.5W SMD2835	G2200K	RA90	2480	>0.9	[BDM] OPAL 120°	Following by Remote Driver [Inside Bollard]	
			G2500K	RA90	2760				
			G2700K	RA90	2900				
			G3000K	RA90	3080				
			G3500K	RA90	3080				
			G4000K	RA90	3260				
			G5000K	RA90	3260				
	2C@40W	TWG	G2700K	G6500K	RA90	2900	>0.9		
4C@40W	RGBW	620nm 520nm 465nm G2700K	\	2900	>0.9				
 ANDERS RD-MCA160B1N	50W [40W] [25W]	192x0.5W SMD2835	G2200K	RA90	2980	>0.9	[Column]	[CDN]: Non-dim [CDT]: TRIAC(10%) [CDV]: 0/1~10V(8%) [CDV0]: 0~10V(1%) [CDV1]: 1~10V(10%) [CDA]: DALI(1%) [CDX]: DMX512(1%) [+CDP]: PWM(1%)	
			G2500K	RA90	3310				
			G2700K	RA90	3480				
			G3000K	RA90	3700				
			G3500K	RA90	3700				
			G4000K	RA90	3920				
			G5000K	RA90	3920				
	2C@50W	TWG	G2700K	G6500K	RA90	3480	>0.9		
4C@50W	RGBW	620nm 520nm 465nm G2700K	\	3480	>0.9				
 ANDERS RD-MCA200B1N	60W [50W] [40W] [25W]	240x0.5W SMD2835	G2200K	RA90	3720	>0.9	BC2C180D	Following [Sensor]	AC100~277V [AC100~240V] [AC100~347V] 50/60Hz
			G2500K	RA90	4140				
			G2700K	RA90	4360				
			G3000K	RA90	4630				
			G3500K	RA90	4630				
			G4000K	RA90	4900				
			G5000K	RA90	4900				
	2C@50W	TWG	G2700K	G6500K	RA90	4360	>0.9		
4C@50W	RGBW	620nm 520nm 465nm G2700K	\	4360	>0.9				
 ANDERS RD-MCA250B1N	75W [60W] [50W] [40W] [25W]	288x0.5W SMD2835	G2200K	RA90	4470	>0.9	BC3C120D	[CSL]: Photocell Lux Sensor	
			G2500K	RA90	4970				
			G2700K	RA90	5230				
			G3000K	RA90	5560				
			G3500K	RA90	5560				
			G4000K	RA90	5880				
			G5000K	RA90	5880				
	2C@75W	TWG	G2700K	G6500K	RA90	5230	>0.9		
4C@75W	RGBW	620nm 520nm 465nm G2700K	\	5230	>0.9				
 ANDERS RD-MCA300B1N	100W [75W] [50W] [40W] [25W]	360x0.5W SMD2835	G2200K	RA90	6210	>0.9	BC4C90D	[CSPD]: Big-level PIR Motion Sensor	[+CV DC12V] [+CV DC24V] [+CV DC42V]
			G2500K	RA90	6900				
			G2700K	RA90	7260				
			G3000K	RA90	7710				
			G3500K	RA90	7710				
			G4000K	RA90	8170				
			G5000K	RA90	8170				
	2C@100W	TWG	G2700K	G6500K	RA90	7260	>0.9		
4C@100W	RGBW	620nm 520nm 465nm G2700K	\	7260	>0.9				
 ANDERS RD-MCA400A1N	100W [120W] [75W] [50W]	600x0.5W SMD2835	G2200K	RA90	6210	>0.9	[BC6C60D]	[CSMD]: Big-level Microwave Motion Sensor	
			G2500K	RA90	6900				
			G2700K	RA90	7260				
			G3000K	RA90	7710				
			G3500K	RA90	7710				
			G4000K	RA90	8170				
			G5000K	RA90	8170				
	2C@100W	TWG	G2700K	G6500K	RA90	7260	>0.9		
4C@100W	RGBW	620nm 520nm 465nm G2700K	\	7260	>0.9				
 MCA500A1N			G2200K	RA90	6210	>0.9		Following by Remote Driver [Outside Bollard]	[CDX]: DMX512(1%) [CDS]: SPI(1%) [CRZ]: ZIGBEE(1%) [CRF]: 2.4G RF(1%) [CRB]: Bluetooth(1%)
			G2500K	RA90	6900				
			G2700K	RA90	7260				
			G3000K	RA90	7710				
			G3500K	RA90	7710				
			G4000K	RA90	8170				
			G5000K	RA90	8170				
	2C@100W	TWG	G2700K	G6500K	RA90	7260	>0.9		
4C@100W	RGBW	620nm 520nm 465nm G2700K	\	7260	>0.9				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

SPECIFICATION

ANDERS RD: ROUND LED GAREN LIGHT

MODEL	POWER [W]	LED TYPE	CCT [K]			CRI	FLUX [LM]	POWER FACTOR	BEAM ANGLE	CUSTOM DIMMING	INPUT [V]				
ANDERS RD-MCA125A2A 	20W [12W]	24x2W SMD3030	G2200K			RA90	1240	>0.9	[BDC] CLEAR [Symmetric] BL30D:30° BL60D:60° BL90D:90° BL120D:120° T5:150° [Asymmetric] T2M:V70xH155° T3M:V80xH155° T4M:V85xH155° [Column]  BC2C180D  BC3C120D  BC4C90D  [BC6C60D]	Following by Remote Driver [Inside Bollard] [CDN]:Non-dim [CDT]:TRIAC(10%) [CDV]:0/1~10V(8%) [CDV0]:0~10V(1%) [CDV1]:1~10V(10%) [CDA]:DALI(1%) [CDX]:DMX512(1%) [+CDP]:PWM(1%) Following [Sensor] [CSL]: Photocell Lux Sensor  [CSPD]: Big-level PIR Motion Sensor  [CSMD]: Big-level Microwave Motion Sensor  Following by Remote Driver [Outside Bollard] [CDX]:DMX512(1%) [CDS]:SPI(1%) [CRZ]:ZIGBEE(1%) [CRF]:2.4G RF(1%) [CRB]:Bluetooth(1%) 7260	AC100~277V [AC100~240V] [AC100~347V] 50/60Hz [+CV DC12V] [+CV DC24V] [+CV DC42V]				
			G2500K			RA90	1380								
			G2700K			RA90	1450								
			G3000K			RA90	1540								
			G3500K			RA90	1540								
			G4000K			RA90	1630								
G5000K			RA90	1630											
G6500K			RA90	1630											
ANDERS RD-MCA125B2A MCA160A2A 	30W [20W] [12W]	24x2W SMD3030	G2200K			RA90	1740	>0.9							
			G2500K			RA90	1930								
			G2700K			RA90	2030								
			G3000K			RA90	2160								
			G3500K			RA90	2160								
			G4000K			RA90	2290								
G5000K			RA90	2290											
G6500K			RA90	2290											
ANDERS RD-E-MCA200A2A 	40W [30W] [20W]	96x2W SMD3030	G2200K			RA90	2480	>0.9							
			G2500K			RA90	2760								
			G2700K			RA90	2900								
			G3000K			RA90	3080								
			G3500K			RA90	3080								
			G4000K			RA90	3260								
G5000K			RA90	3260											
G6500K			RA90	3260											
ANDERS RD-MCA160B2A 	50W [40W] [25W]	60x2W SMD3030	G2200K			RA90	2980	>0.9							
			G2500K			RA90	3310								
			G2700K			RA90	3480								
			G3000K			RA90	3700								
			G3500K			RA90	3700								
			G4000K			RA90	3920								
G5000K			RA90	3920											
G6500K			RA90	3920											
ANDERS RD-MCA200B2A 	60W [50W] [40W] [25W]	96x2W SMD3030	G2200K			RA90	3710	>0.9							
			G2500K			RA90	4110								
			G2700K			RA90	4330								
			G3000K			RA90	4600								
			G3500K			RA90	4600								
			G4000K			RA90	4870								
G5000K			RA90	4870											
G6500K			RA90	4870											
ANDERS RD-MCA250B2A 	75W [60W] [50W] [40W] [25W]	96x2W SMD3030	G2200K			RA90	4470	>0.9							
			G2500K			RA90	4970								
			G2700K			RA90	5230								
			G3000K			RA90	5560								
			G3500K			RA90	5560								
			G4000K			RA90	5880								
G5000K			RA90	5880											
G6500K			RA90	5880											
ANDERS RD-MCA300B2A MCA400A2A 	100W [75W] [50W] [40W] [25W]	216x2W SMD3030	G2200K			RA90	6210	>0.9							
			G2500K			RA90	6900								
			G2700K			RA90	7260								
			G3000K			RA90	7710								
			G3500K			RA90	7710								
			G4000K			RA90	8170								
G5000K			RA90	8170											
G6500K			RA90	8170											
ANDERS RD-MCA500A2A 	150W [120W] [100W] [75W] [50W]	384x2W SMD3030	G2200K			RA90	9260	>0.9							
			G2500K			RA90	10280								
			G2700K			RA90	10820								
			G3000K			RA90	11500								
			G3500K			RA90	11500								
			G4000K			RA90	12180								
G5000K			RA90	12180											
G6500K			RA90	12180											
2C@150W			TWG			G2700K	G6500K	RA90				10820	>0.9		
4C@150W			RGBW			620nm	520nm	465nm				G2700K	\	10820	>0.9

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.




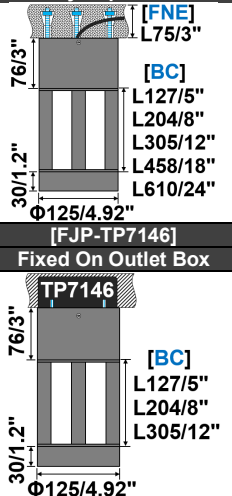



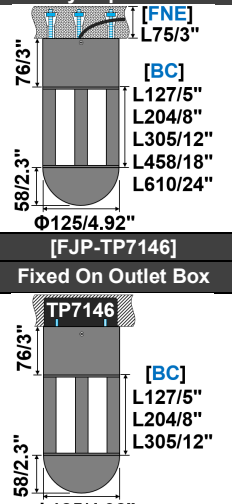




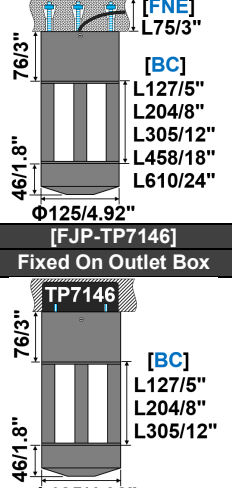
ANDERS RD-MCA125A: LED GARDEN LIGHT

SPECIFICATION

(MCA125A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

(MCA125A)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L127 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L127	[BC6C60D] L458		
					
(MCA125A)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC6C60D]-L305 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					
(MCA125A)-[MTT]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L305 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					






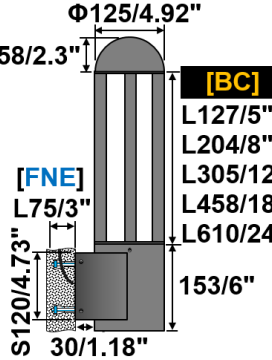
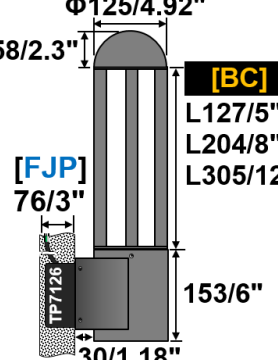




ANDERS RD-MCA125A: LED GARDEN LIGHT

SPECIFICATION

(MCA125A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.


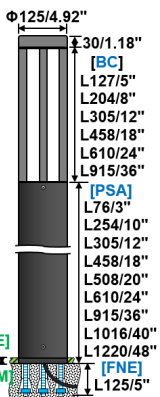
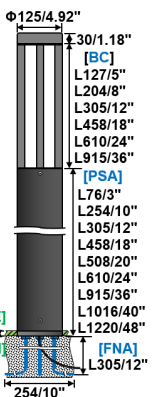






(MCA125A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
					
(MCA125A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
					
(MCA125A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L610	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
					

ANDERS RD-MCA125A: LED GARDEN LIGHT

SPECIFICATION

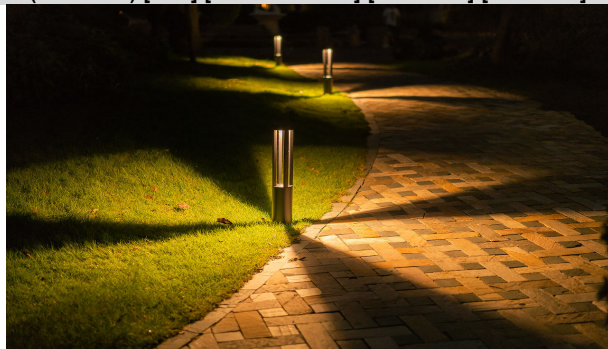
(MCA125A): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.
NOTES: Total Height need be shorter than 1678mm/66"

(MCA125A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L127	[BC6C60D] L305	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 30/1.18" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 125/4.92"$ 30/1.18" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA125A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L610	[BC6C60D] L458	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 63/2.46" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 125/4.92"$ 63/2.46" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA125A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L610	[BC6C60D] L458	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 45/1.8" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 125/4.92"$ 45/1.8" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]

CASE STUDY

(MCA125A)-[MTF]-[BC4C90D-L458]-[PSA-L305]-[FNE-L125]


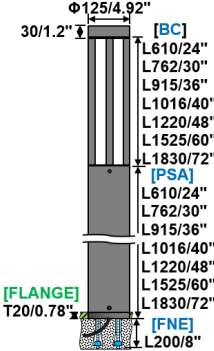
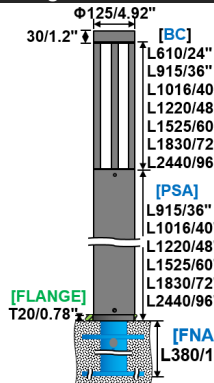
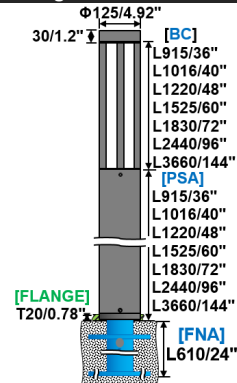


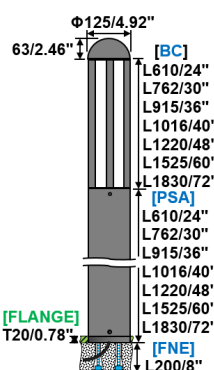
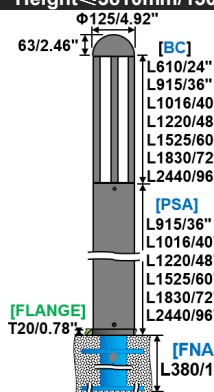
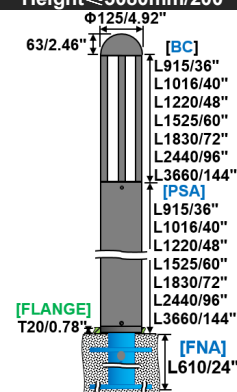

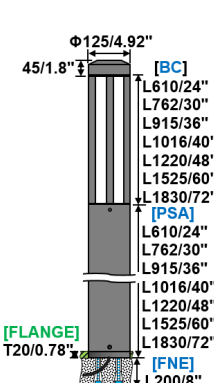
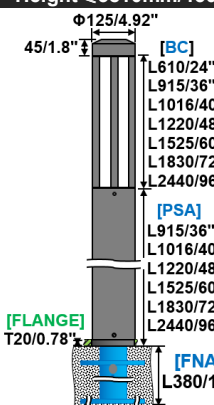
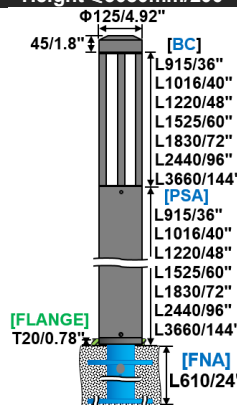


(MCA125A)-[MTF]-[BC6C60D-L204]-[PSA-L615]-[FNA-L200]



ANDERS RD-MCA125A: LED GARDEN LIGHT

SPECIFICATION

(MCA125A): [PSA] Tall Bollard Light							
(MCA125A)-[MTF]				DIMENSION:[UNIT: MM]			
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"	
				 Φ125/4.92" 30/1.2" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 30/1.2" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 30/1.2" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"	
(MCA125A)-[MTD]				DIMENSION:[UNIT: MM]			
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"	
				 Φ125/4.92" 63/2.46" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 63/2.46" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 63/2.46" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"	
(MCA125A)-[MTT]				DIMENSION:[UNIT: MM]			
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"	
				 Φ125/4.92" 45/1.8" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 45/1.8" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 45/1.8" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"	

CASE STUDY

(MCA125A)-[MTF]-[BC3C120D-L1220]-[PSA-L1220]-[FNA-L380]	(MCA125A)-[MTF]-[BC4C90D-L1525]-[PSA-L915]-[FNA-L380]
	




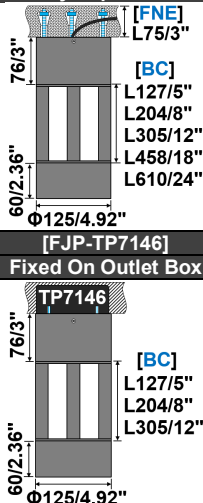


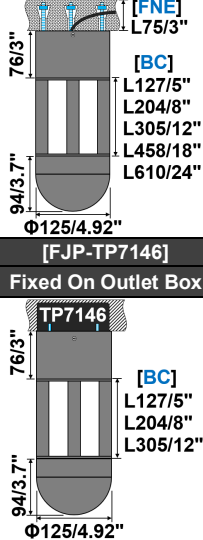



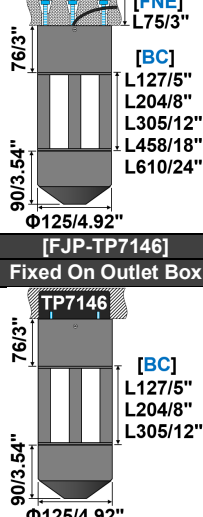
ANDERS RD-MCA125B: LED GARDEN LIGHT

SPECIFICATION

(MCA125B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

(MCA125B)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L127 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L127	[BC6C60D] L458		
					
(MCA125B)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC6C60D]-L305 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					
(MCA125B)-[MTI]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L305 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					



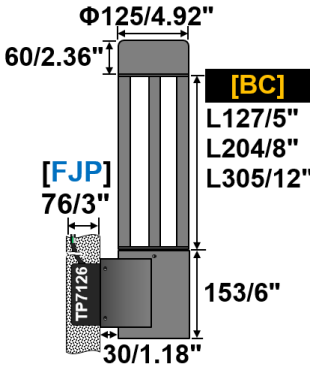


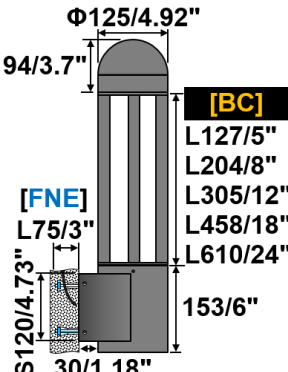
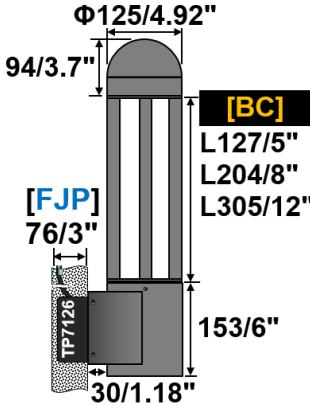



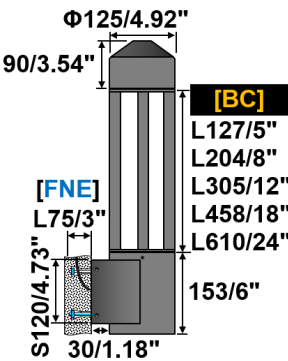
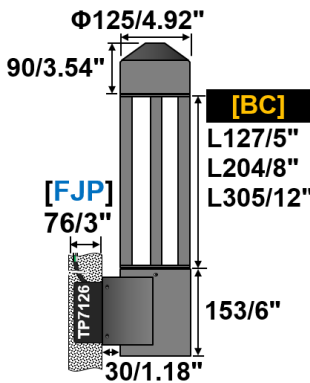
ANDERS RD-MCA125B: LED GARDEN LIGHT

SPECIFICATION

(MCA125B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.








(MCA125B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
				 $\Phi 125/4.92''$ $60/2.36''$ [BC] L127/5" L204/8" L305/12" L458/18" L610/24" [FNE] L75/3" $S120/4.73''$ $30/1.18''$ 153/6"	 $\Phi 125/4.92''$ $60/2.36''$ [BC] L127/5" L204/8" L305/12" [FJP] 76/3" $S120/4.73''$ $30/1.18''$ 153/6"
(MCA125B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
				 $\Phi 125/4.92''$ $94/3.7''$ [BC] L127/5" L204/8" L305/12" L458/18" L610/24" [FNE] L75/3" $S120/4.73''$ $30/1.18''$ 153/6"	 $\Phi 125/4.92''$ $94/3.7''$ [BC] L127/5" L204/8" L305/12" [FJP] 76/3" $S120/4.73''$ $30/1.18''$ 153/6"
(MCA125B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L127	[BC3C120D] L204	[BC4C90D] L305	[BC6C60D] L610	[FNE-L75] Fixed by Expansion Bolt	[FJP-TP7126] Fixed on Outlet Box
				 $\Phi 125/4.92''$ $90/3.54''$ [BC] L127/5" L204/8" L305/12" L458/18" L610/24" [FNE] L75/3" $S120/4.73''$ $30/1.18''$ 153/6"	 $\Phi 125/4.92''$ $90/3.54''$ [BC] L127/5" L204/8" L305/12" [FJP] 76/3" $S120/4.73''$ $30/1.18''$ 153/6"

ANDERS RD-MCA125B: LED GARDEN LIGHT

SPECIFICATION

(MCA125B): [PSA] Bollard Light

NOTES: [PSA] shorter than **254mm** need to be DC24V and the remote driver outside fixture.
NOTES: Total Height need be shorter than 1678mm/66"

(MCA125B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L610	[BC6C60D] L458	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 60/2.36" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" x [CUSTOM]	 $\Phi 125/4.92"$ 60/2.36" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" x [CUSTOM]
(MCA125B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L610	[BC6C60D] L458	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 94/3.7" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" x [CUSTOM]	 $\Phi 125/4.92"$ 94/3.7" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" x [CUSTOM]
(MCA125B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L610	[BC6C60D] L458	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 125/4.92"$ 90/3.54" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" x [CUSTOM]	 $\Phi 125/4.92"$ 90/3.54" [BC] L127/5" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" x [CUSTOM]

CASE STUDY

(MCA125B)-[MTF]-[BC4C90D-L458]-[PSA-L305]-[FNE-L125]


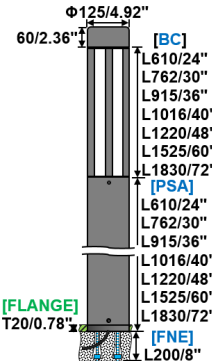
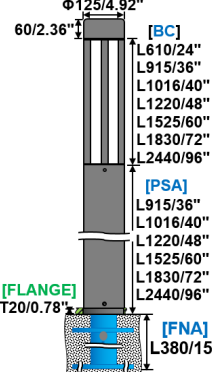
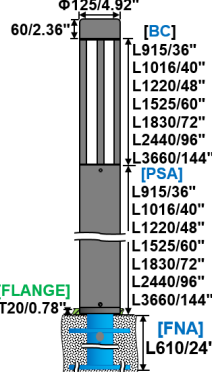

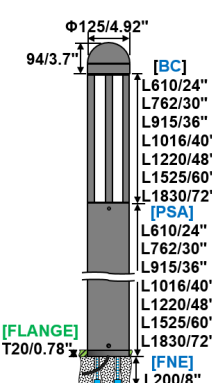
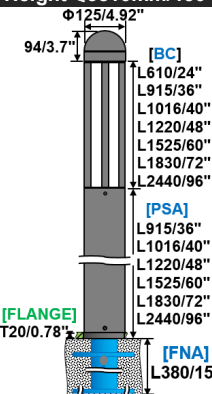
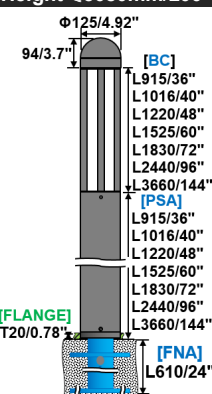

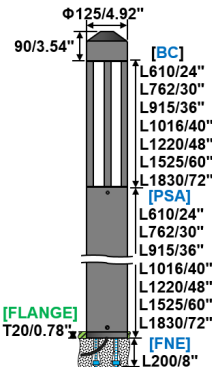
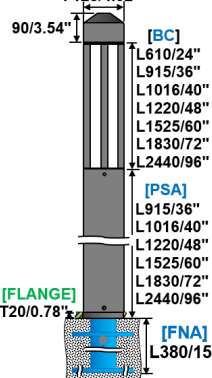
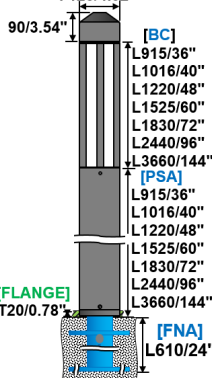


(MCA125B)-[MTF]-[BC2C180D-L204]-[PSA-L915]-[FNA-L305]



ANDERS RD-MCA125B: LED GARDEN LIGHT

SPECIFICATION

(MCA125B): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA125B)-[MTF]						
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ125/4.92" 60/2.36" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 60/2.36" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 60/2.36" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"
(MCA125B)-[MTD]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ125/4.92" 94/3.7" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 94/3.7" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 94/3.7" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"
(MCA125B)-[MTT]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L458	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ125/4.92" 90/3.54" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L200/8"	 Φ125/4.92" 90/3.54" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L380/15"	 Φ125/4.92" 90/3.54" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L610/24"

CASE STUDY















(MCA125B)-[MTF]-[BC3C120D-L1220]-[PSA-L610]-[FNA-L380]		(MCA125B)-[MTTF]-[BC4C90D-L2440]-[PSA-L1220]-[FNA-L610]	
			

ANDERS RD-MCA160A: LED GARDEN LIGHT

SPECIFICATION

(MCA160A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.
 NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.
 NOTES: Total Height need be shorter than 710mm/30"

(MCA160A)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt		CASE STUDY [BC4C90D]-L228 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L153	[BC6C60D] L458			
   						
(MCA160A)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt		CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458			
   						
(MCA160A)-[MTT]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt		CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458			
   						

ANDERS RD-MCA160A: LED GARDEN LIGHT

SPECIFICATION

(MCA160A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.









(MCA160A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ160/6.3" 30/1.18" 30/1.18" 120/4.73" 75/3" 153/6" 153/6"	Φ160/6.3" 30/1.18" 30/1.18" 120/4.73" 75/3" 153/6" 153/6"
(MCA160A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ160/6.3" 80/3.15" 80/3.15" 120/4.73" 75/3" 153/6" 153/6"	Φ160/6.3" 80/3.15" 80/3.15" 120/4.73" 75/3" 153/6" 153/6"
(MCA160A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ160/6.3" 45/1.8" 45/1.8" 120/4.73" 75/3" 153/6" 153/6"	Φ160/6.3" 45/1.8" 45/1.8" 120/4.73" 75/3" 153/6" 153/6"

ANDERS RD-MCA160A: LED GARDEN LIGHT

SPECIFICATION

(MCA160A): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.
NOTES: Total Height need be shorter than 1678mm/66"

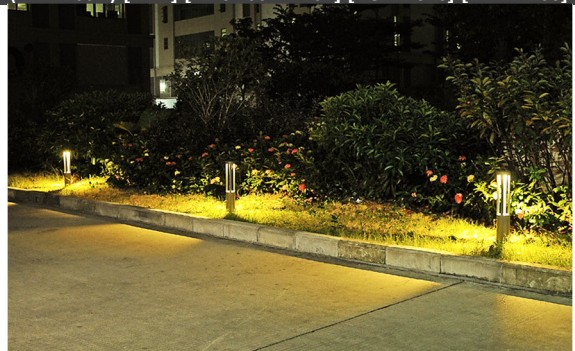
(MCA160A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L153	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ160/6.3" 30/1.2" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 Φ160/6.3" 30/1.2" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM] 254/10"
(MCA160A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ160/6.3" 80/3.15" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 Φ160/6.3" 80/3.15" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM] 254/10"
(MCA160A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ160/6.3" 45/1.8" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4" [CUSTOM]	 Φ160/6.3" 45/1.8" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM] 254/10"

CASE STUDY

(MCA160A)-[MTF]-[BC3C120D-L610]-[PSA-L305]-[FNE-L125]



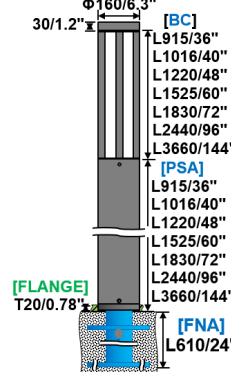
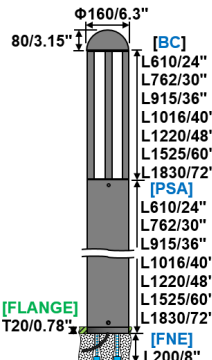
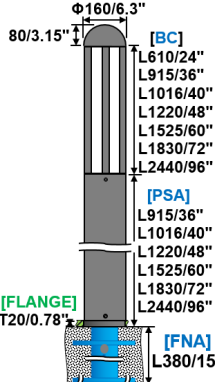
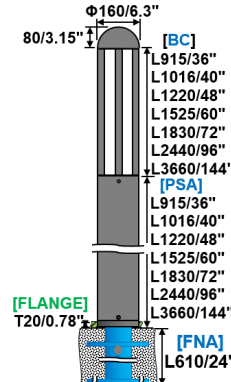


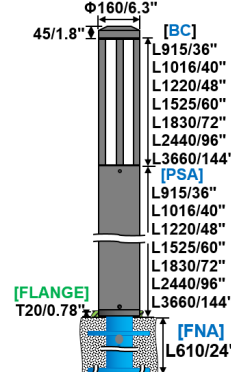


(MCA160A)-[MTF]-[BC6C60D-L204]-[PSA-L615]-[FNA-L200]

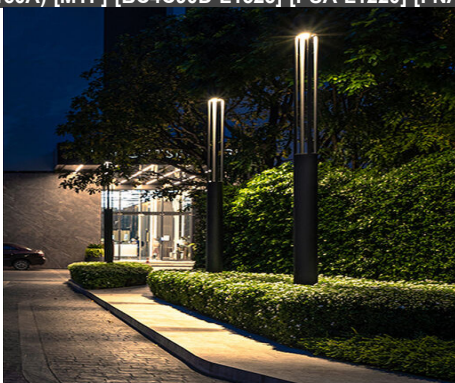


ANDERS RD-MCA160A: LED GARDEN LIGHT

SPECIFICATION

(MCA160A): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA160A)-[MTF]						
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ160/6.3" 30/1.2" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FNE] L200/8"	 Φ160/6.3" 30/1.2" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FNA] L380/15"	 Φ160/6.3" 30/1.2" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FNA] L610/24"
(MCA160A)-[MTD]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ160/6.3" 80/3.15" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FNE] L200/8"	 Φ160/6.3" 80/3.15" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FNA] L380/15"	 Φ160/6.3" 80/3.15" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FNA] L610/24"
(MCA160A)-[MTT]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ160/6.3" 45/1.8" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FNE] L200/8"	 Φ160/6.3" 45/1.8" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FNA] L380/15"	 Φ160/6.3" 45/1.8" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FNA] L610/24"

CASE STUDY


















(MCA160A)-[MTF]-[BC3C120D-L1220]-[PSA-L1220]-[FNA-L380]	(MCA160A)-[MTF]-[BC4C90D-L1525]-[PSA-L1220]-[FNA-L450]
	

ANDERS RD-MCA160B: LED GARDEN LIGHT

SPECIFICATION

(MCA160B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.
 NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.
 NOTES: Total Height need be shorter than 710mm/30"

(MCA160B)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L228 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L153	[BC6C60D] L458		
				 	
(MCA160B)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
				 	
(MCA160B)-[MTT]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
				 	

ANDERS RD-MCA160B: LED GARDEN LIGHT

SPECIFICATION

(MCA160B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

(MCA160B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
(MCA160B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
(MCA160B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L153	[BC3C120D] L228	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor



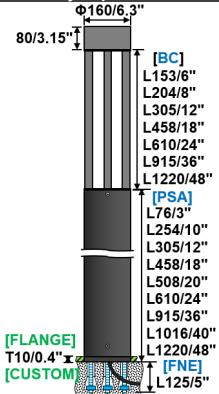
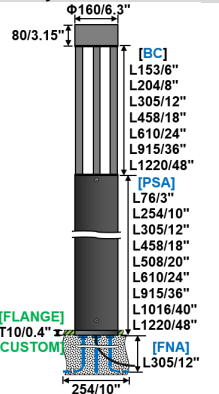



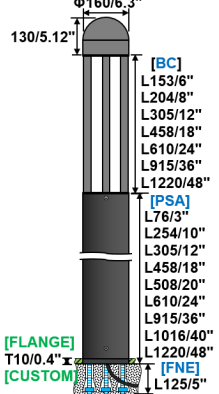
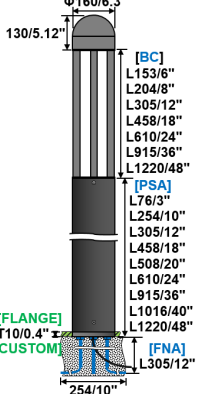



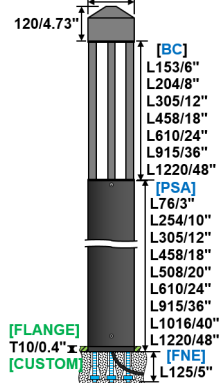
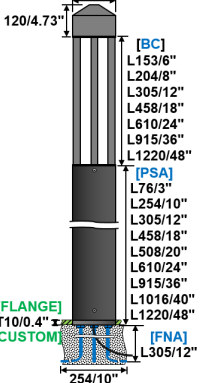
ANDERS RD-MCA160B: LED GARDEN LIGHT

SPECIFICATION

(MCA160B): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.

NOTES: Total Height need be shorter than 1678mm/66"

(MCA160B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L153	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 80/3.15" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4"x" [CUSTOM]	 80/3.15" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4"x" [CUSTOM] 254/10"
(MCA160B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 130/5.12" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4"x" [CUSTOM]	 130/5.12" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4"x" [CUSTOM] 254/10"
(MCA160B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L610	[FNE-L125] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 120/4.73" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L125/5" [FLANGE] T10/0.4"x" [CUSTOM]	 120/4.73" Φ160/6.3" [BC] L153/6" L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L76/3" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4"x" [CUSTOM] 254/10"

CASE STUDY

(MCA160B)-[MTD]-[BC3C120D-L610]-[PSA-L76]-[FNE-L125]


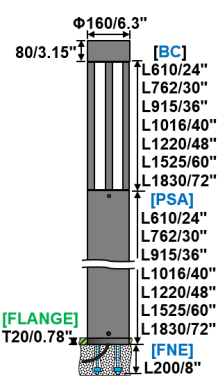
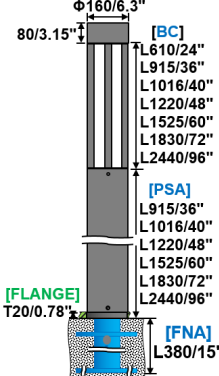
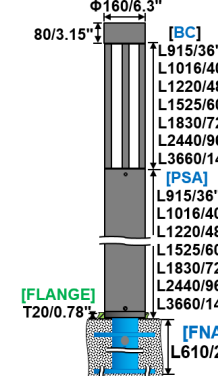

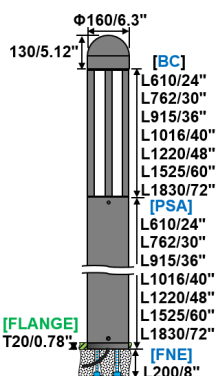
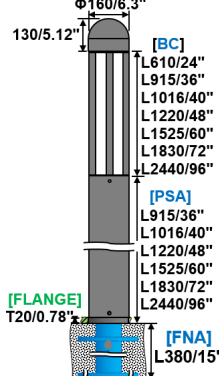
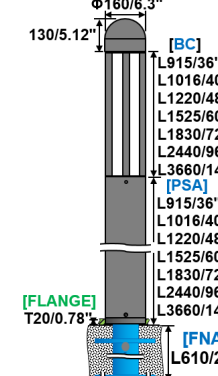

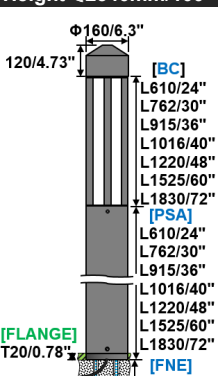
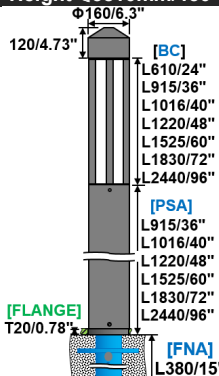
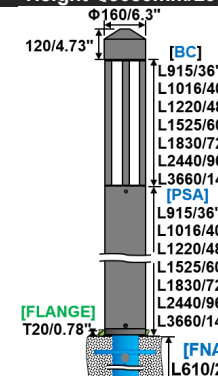


(MCA160B)

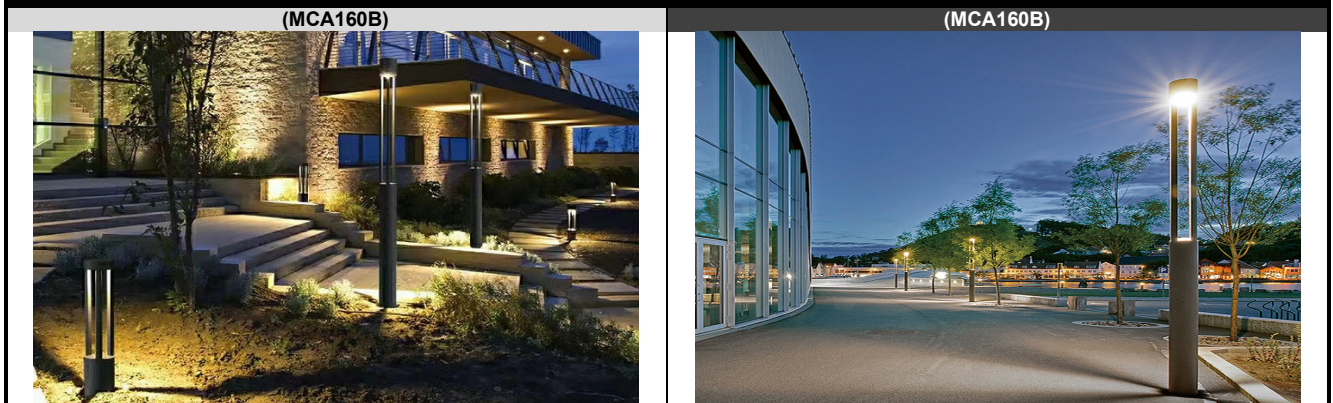


ANDERS RD-MCA160B: LED GARDEN LIGHT

SPECIFICATION

(MCA160B): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA160B)-[MTF]						
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
						
(MCA160B)-[MTD]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
						
(MCA160B)-[MTT]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L200] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L380] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L610] Fixed by Pre-buried Anchor Height≤5080mm/200"
						

CASE STUDY



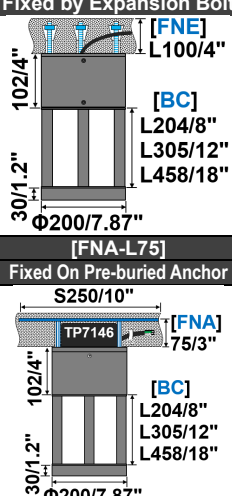


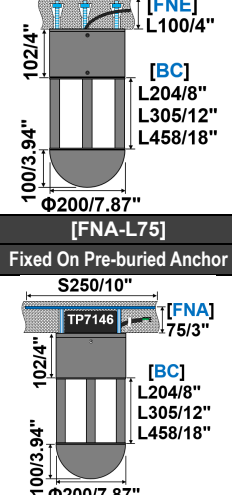


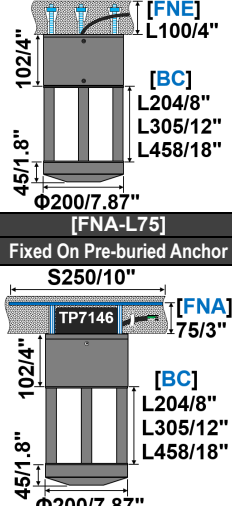


ANDERS RD-MCA200A: LED GARDEN LIGHT

SPECIFICATION

(MCA200A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.
 NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.
 NOTES: Total Height need be shorter than 710mm/30"

(MCA200A)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L100] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L228 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L153	[BC6C60D] L458		
					
(MCA200A)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L100] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					
(MCA200A)-[MTT]				DIMENSION:[UNIT: MM] [FNE-L100] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
					
















ANDERS RD-MCA200A: LED GARDEN LIGHT

SPECIFICATION

(MCA200A)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.




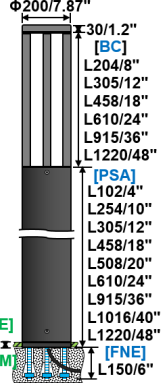
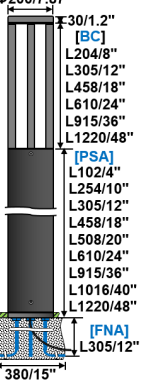

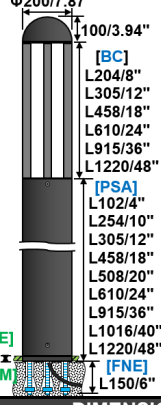
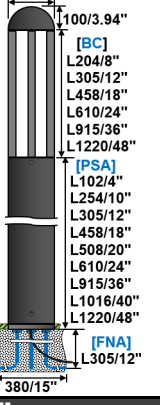

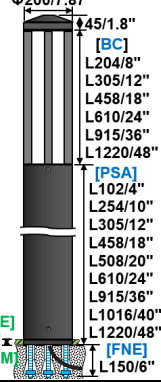
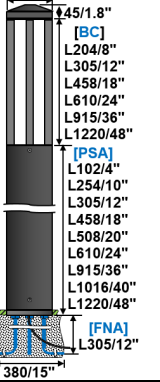
(MCA200A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458	[FNE-L100] Fixed by Expansion Bolt	[FNA-L100] Fixed On Pre-buried Anchor
				 Φ200/7.87" 30/1.2" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074	 Φ200/7.87" 30/1.2" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074
(MCA200A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458	[FNE-L100] Fixed by Expansion Bolt	[FNA-L100] Fixed On Pre-buried Anchor
				 Φ200/7.87" 100/3.94" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074	 Φ200/7.87" 100/3.94" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074
(MCA200A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458	[FNE-L100] Fixed by Expansion Bolt	[FNA-L100] Fixed On Pre-buried Anchor
				 Φ200/7.87" 45/1.8" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074	 Φ200/7.87" 45/1.8" [BC] L204/8" L305/12" L458/18" 178/7" 51/2" 4" TP7074

ANDERS RD-MCA200A: LED GARDEN LIGHT

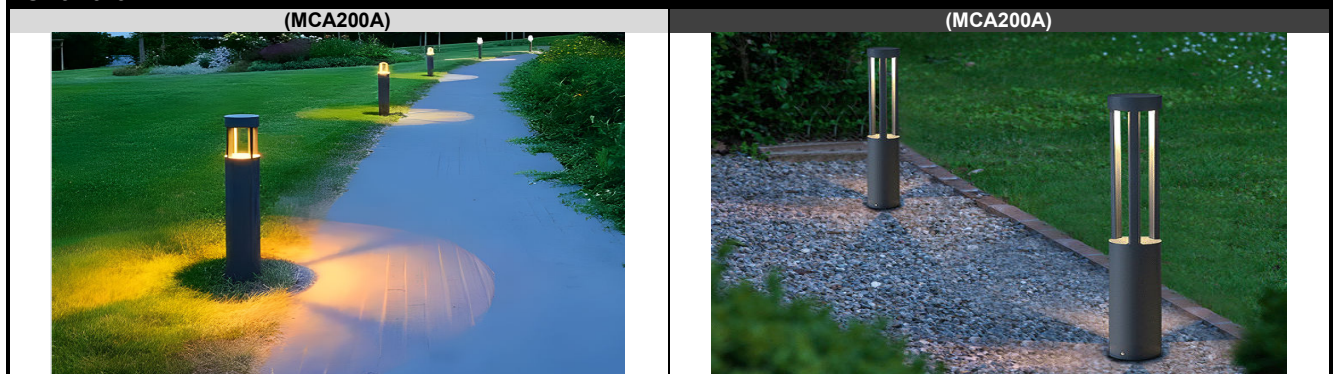
SPECIFICATION

(MCA200A): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.
NOTES: Total Height need be shorter than 1678mm/66"

(MCA200A)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L204	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ200/7.87" 30/1.2" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNE] L150/6"	 Φ200/7.87" 30/1.2" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNA] L305/12" 380/15"
(MCA200A)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ200/7.87" 100/3.94" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNE] L150/6"	 Φ200/7.87" 100/3.94" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNA] L305/12" 380/15"
(MCA200A)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 Φ200/7.87" 45/1.8" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNE] L150/6"	 Φ200/7.87" 45/1.8" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" ± [CUSTOM] [FNA] L305/12" 380/15"

CASE STUDY

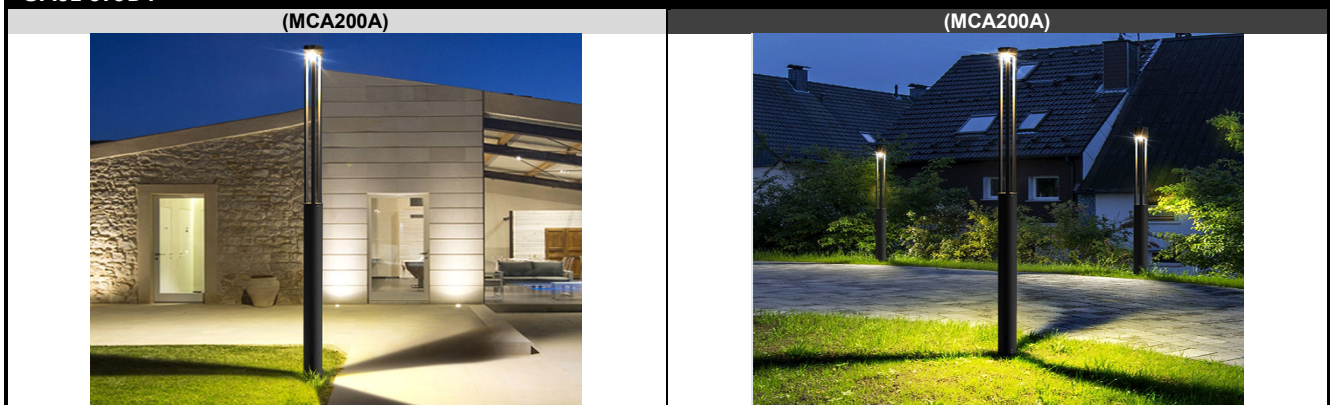


ANDERS RD-MCA200A: LED GARDEN LIGHT

SPECIFICATION

(MCA200A): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA200A)-[MTF]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			
(MCA200A)-[MTD]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			
(MCA200A)-[MTT]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			

CASE STUDY



















ANDERS RD-MCA200B: LED GARDEN LIGHT

SPECIFICATION

(MCA200B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.
 NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.
 NOTES: Total Height need be shorter than 710mm/30"

(MCA200B)-[MTF]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY [BC4C90D]-L228 Wall Surface Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L153	[BC6C60D] L458		
				 	
(MCA200B)-[MTD]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
				 	
(MCA200B)-[MTT]				DIMENSION:[UNIT: MM] [FNE-L75] Fixed by Expansion Bolt	CASE STUDY: DC24V Version [BC2C180D]-L228 Ground Mounted
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L458	[BC6C60D] L458		
				 	

ANDERS RD-MCA200B: LED GARDEN LIGHT

SPECIFICATION

(MCA200B)-[FFS] Surface Mounted Light

NOTES: Customs Engraved Pattern and [BGL] Glare shield Referred to Another Specifications.

NOTES: Custom Installation and Accessories Referred to Another Catalogue of Fixing Kits.

(MCA200B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ200/7.87" 80/3.15" [BC] L204/8" L305/12" L458/18" [FNE] L100 4" TP7074 51/2" 178/7"	Φ200/7.87" 80/3.15" [BC] L204/8" L305/12" L458/18" [FNA] L100 4" TP7074 51/2" 178/7"
(MCA200B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ200/7.87" 150/5.9" [BC] L204/8" L305/12" L458/18" [FNE] L100 4" TP7074 51/2" 178/7"	Φ200/7.87" 150/5.9" [BC] L204/8" L305/12" L458/18" [FNA] L100 4" TP7074 51/2" 178/7"
(MCA200B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L204	[BC3C120D] L305	[BC4C90D] L305	[BC6C60D] L458	[FNE-L75] Fixed by Expansion Bolt	[FNA-L75] Fixed On Pre-buried Anchor
				Φ200/7.87" 120/4.73" [BC] L204/8" L305/12" L458/18" [FNE] L100 4" TP7074 51/2" 178/7"	Φ200/7.87" 120/4.73" [BC] L204/8" L305/12" L458/18" [FNA] L100 4" TP7074 51/2" 178/7"



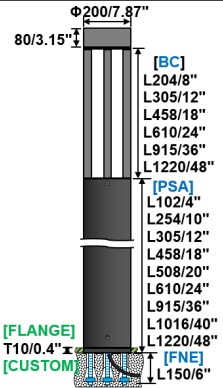
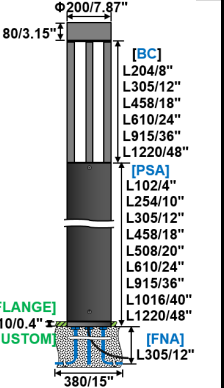



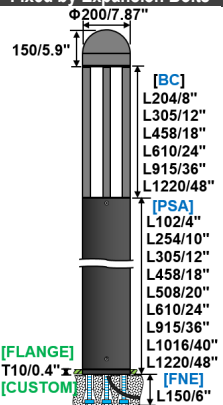
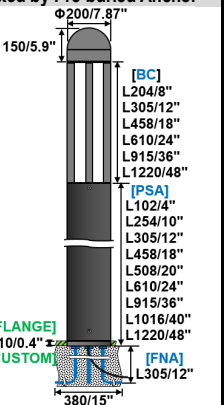



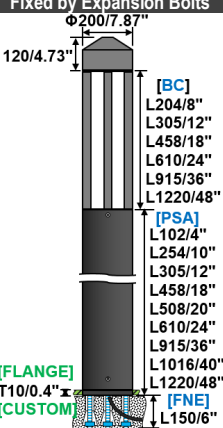
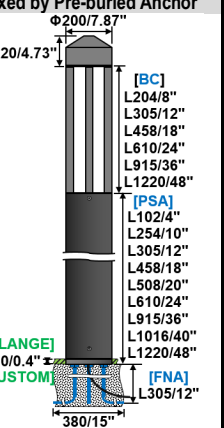
ANDERS RD-MCA200B: LED GARDEN LIGHT

SPECIFICATION

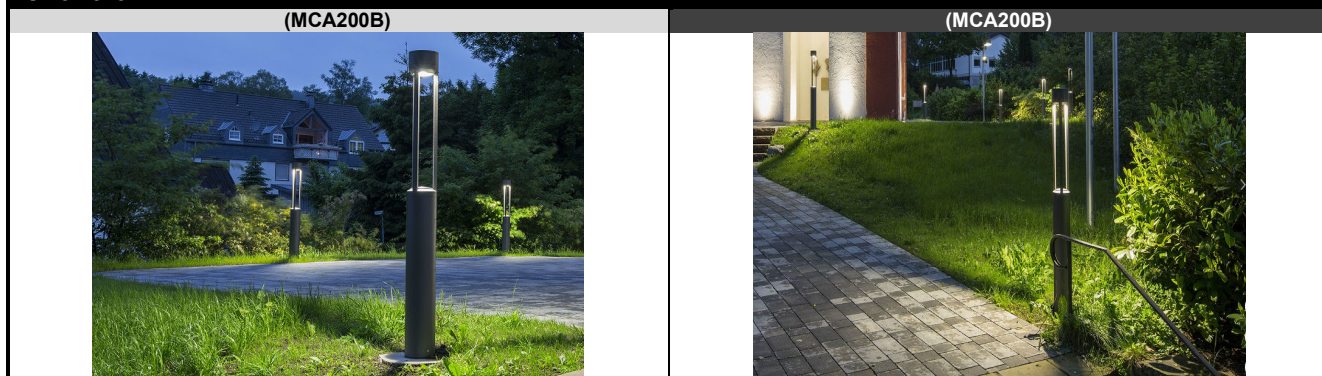
(MCA200B): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.

NOTES: Total Height need be shorter than 1678mm/66"




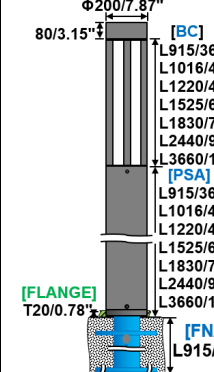






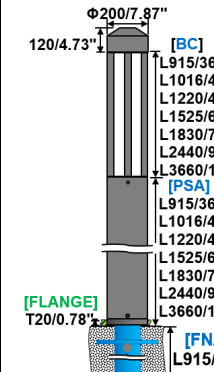
(MCA200B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L305	[BC3C120D] L610	[BC4C90D] L204	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 200/7.87"$ 80/3.15" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 200/7.87"$ 80/3.15" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA200B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L610	[BC4C90D] L610	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 200/7.87"$ 150/5.9" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 200/7.87"$ 150/5.9" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA200B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L610	[BC6C60D] L610	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 200/7.87"$ 120/4.73" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 200/7.87"$ 120/4.73" [BC] L204/8" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]

CASE STUDY

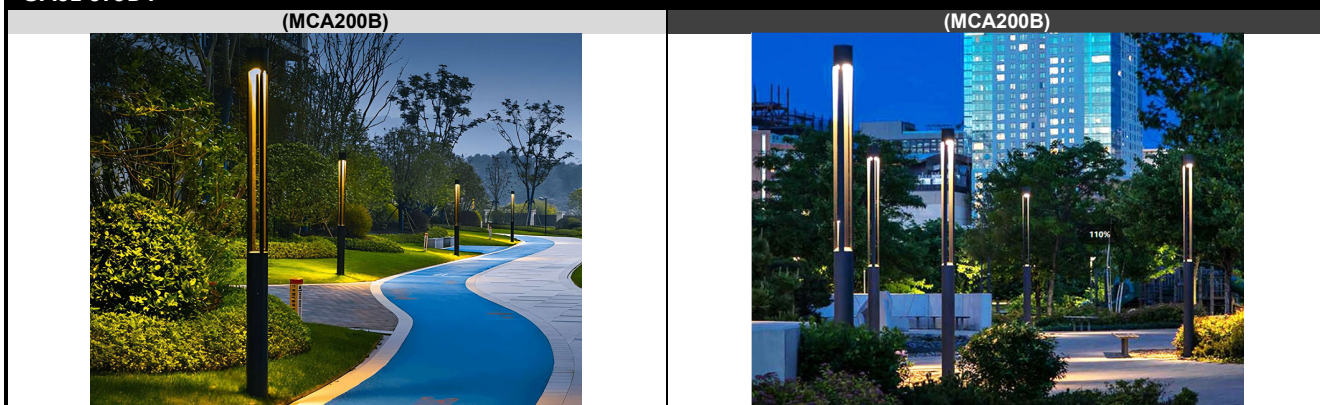


ANDERS RD-MCA200B: LED GARDEN LIGHT

SPECIFICATION

(MCA200B): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA200B)-[MTF]						
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
						
(MCA200B)-[MTD]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
						
(MCA200B)-[MTT]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
						

CASE STUDY





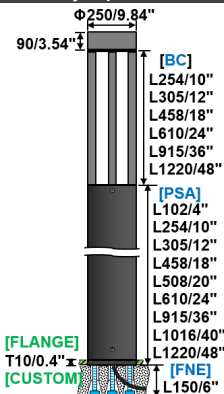
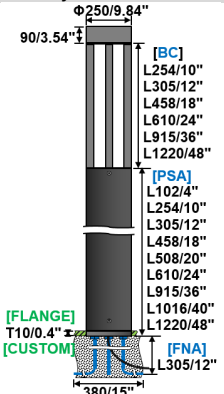


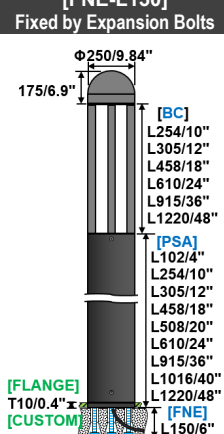
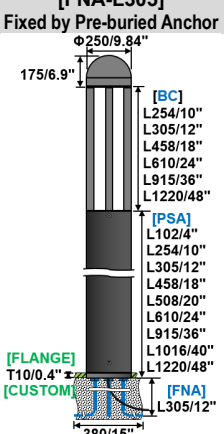


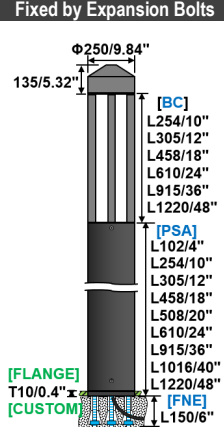
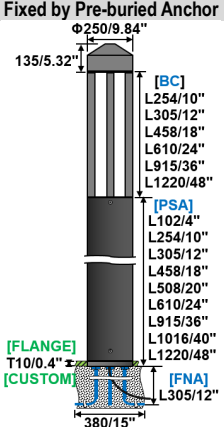
ANDERS RD-MCA250B: LED GARDEN LIGHT

SPECIFICATION

(MCA250B): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.

NOTES: Total Height need be shorter than 1678mm/66"

(MCA250B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L204	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 250/9.84"$ 90/3.54" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 250/9.84"$ 90/3.54" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA250B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L610	[BC4C90D] L915	[BC6C60D] L1220	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 250/9.84"$ 175/6.9" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 250/9.84"$ 175/6.9" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]
(MCA250B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L610	[BC4C90D] L915	[BC6C60D] L1220	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 $\Phi 250/9.84"$ 135/5.32" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNE] L150/6" [FLANGE] T10/0.4" [CUSTOM]	 $\Phi 250/9.84"$ 135/5.32" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FNA] L305/12" [FLANGE] T10/0.4" [CUSTOM]

CASE STUDY



ANDERS RD-MCA250B: LED GARDEN LIGHT

SPECIFICATION

(MCA250B): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA250B)-[MTF]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			
(MCA250B)-[MTD]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			
(MCA250B)-[MTT]				[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220			




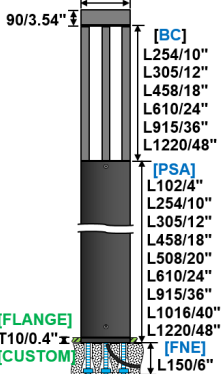
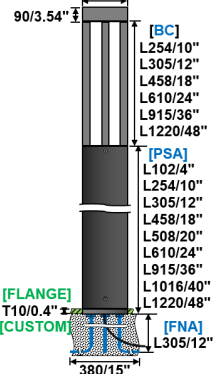


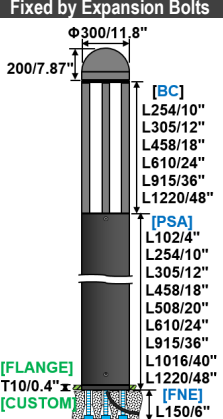
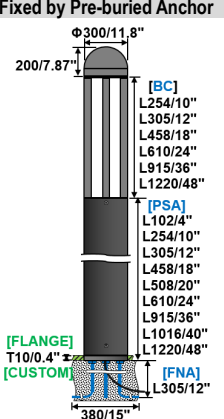



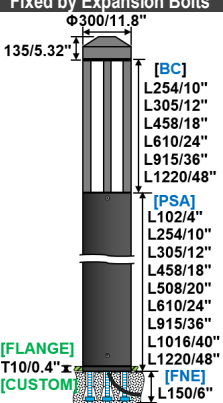
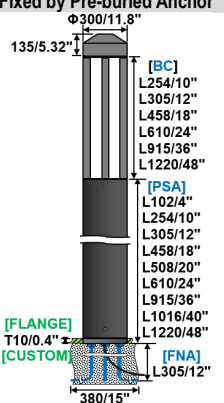
CASE STUDY	
(MCA250B)	(MCA250B)

ANDERS RD-MCA300B: LED GARDEN LIGHT

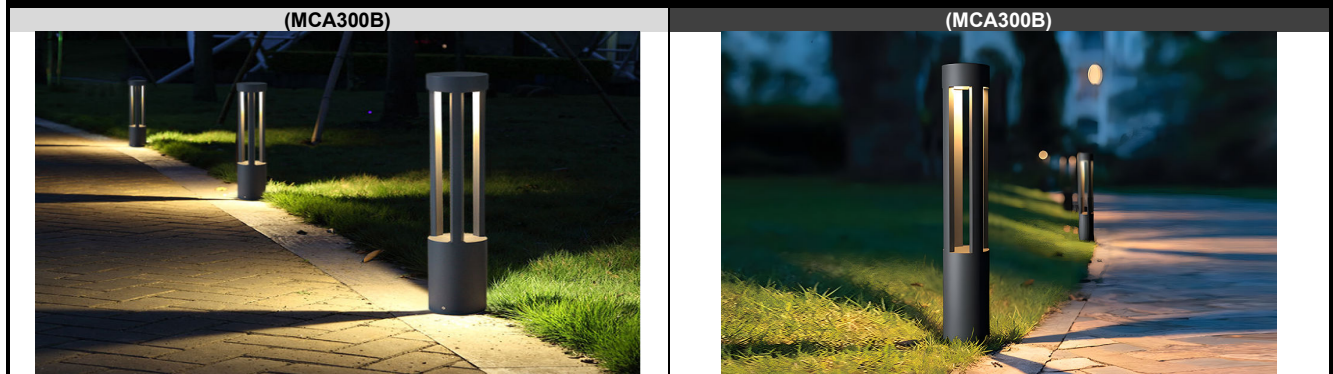
SPECIFICATION

(MCA300B): [PSA] Bollard Light

NOTES: [PSA] shorter than 254mm need to be DC24V and the remote driver outside fixture.
NOTES: Total Height need be shorter than 1678mm/66"


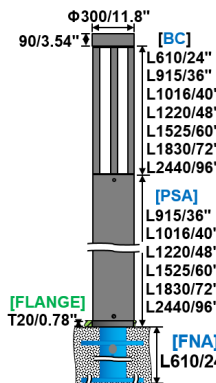
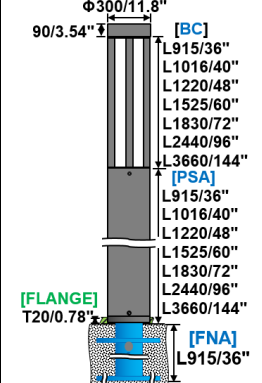

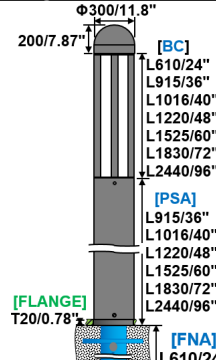
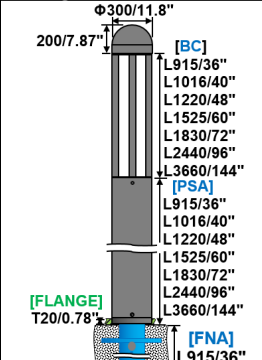


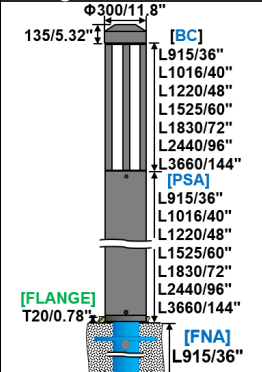
(MCA300B)-[MTF]				DIMENSION:[UNIT: MM]	
[BC2C180D] L610	[BC3C120D] L458	[BC4C90D] L204	[BC6C60D] L915	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 90/3.54" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNE] [CUSTOM] L150/6"	 90/3.54" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNA] [CUSTOM] L305/12" 380/15"
(MCA300B)-[MTD]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L610	[BC4C90D] L915	[BC6C60D] L1220	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 200/7.87" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNE] [CUSTOM] L150/6"	 200/7.87" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNA] [CUSTOM] L305/12" 380/15"
(MCA300B)-[MTT]				DIMENSION:[UNIT: MM]	
[BC2C180D] L458	[BC3C120D] L610	[BC4C90D] L915	[BC6C60D] L1220	[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
				 135/5.32" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNE] [CUSTOM] L150/6"	 135/5.32" Φ 300/11.8" [BC] L254/10" L305/12" L458/18" L610/24" L915/36" L1220/48" [PSA] L102/4" L254/10" L305/12" L458/18" L508/20" L610/24" L915/36" L1016/40" L1220/48" [FLANGE] T10/0.4" x [FNA] [CUSTOM] L305/12" 380/15"

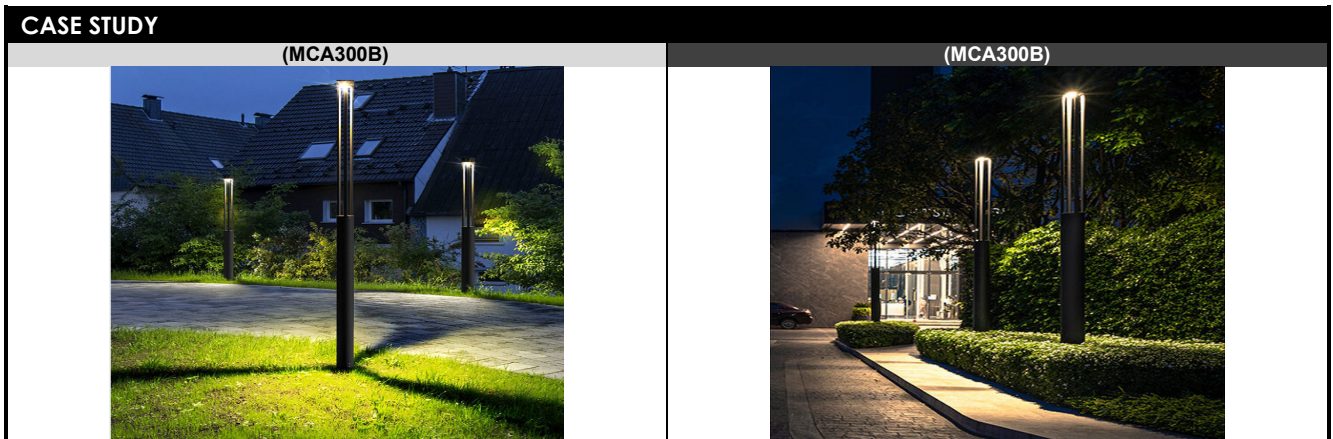
CASE STUDY



ANDERS RD-MCA300B: LED GARDEN LIGHT

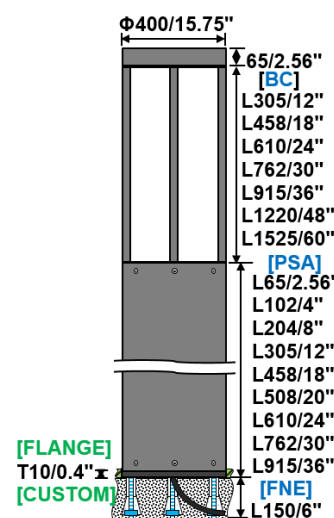
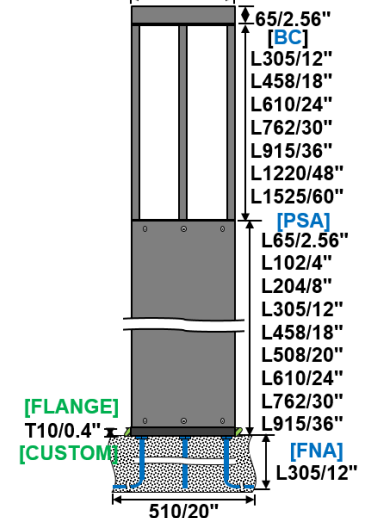
SPECIFICATION

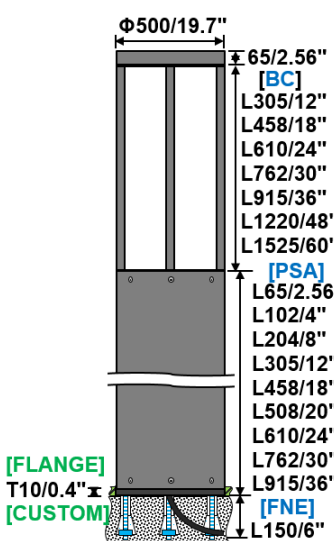
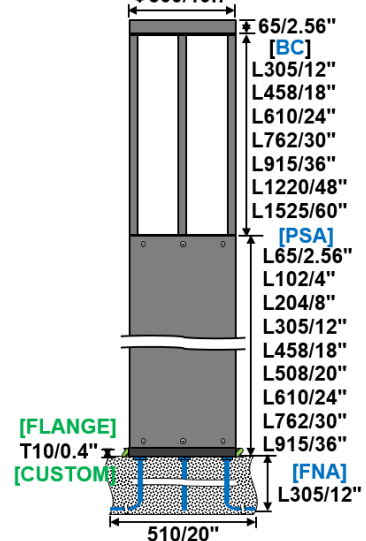
(MCA300B): [PSA] Tall Bollard Light				DIMENSION:[UNIT: MM]		
(MCA300B)-[MTF]						
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ300/11.8" 90/3.54" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L300/12"	 Φ300/11.8" 90/3.54" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L610/24"	 Φ300/11.8" 90/3.54" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L915/36"
(MCA300B)-[MTD]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ300/11.8" 200/7.87" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L300/12"	 Φ300/11.8" 200/7.87" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L610/24"	 Φ300/11.8" 200/7.87" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L915/36"
(MCA300B)-[MTT]				DIMENSION:[UNIT: MM]		
[BC2C180D] L915	[BC3C120D] L610	[BC4C90D] L1220	[BC6C60D] L1220	[FNE-L300] Fixed by Expansion Bolts Height≤2540mm/100"	[FNA-L610] Fixed by Pre-buried Anchor Height≤3810mm/150"	[FNA-L915] Fixed by Pre-buried Anchor Height≤5080mm/200"
				 Φ300/11.8" 135/5.32" [BC] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [PSA] L610/24" L762/30" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" [FLANGE] T20/0.78" [FNE] L300/12"	 Φ300/11.8" 135/5.32" [BC] L610/24" L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" [FLANGE] T20/0.78" [FNA] L610/24"	 Φ300/11.8" 135/5.32" [BC] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [PSA] L915/36" L1016/40" L1220/48" L1525/60" L1830/72" L2440/96" L3660/144" [FLANGE] T20/0.78" [FNA] L915/36"



ANDERS RD-MCA400A & MCA500A: LED GARDEN LIGHT

SPECIFICATION

(MCA400A): [PSA] Bollard Light				DIMENSION:[UNIT: MM]	
(MCA400A)-[MTF]				[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L305	[BC6C60D] L305		
[BC2C180D] L610	[BC3C120D] L610	[BC4C90D] L610	[BC6C60D] L610		
[BC2C180D] L610	[BC3C120D] L610	[BC4C90D] L610	[BC6C60D] L610		

(MCA500A): [PSA] Bollard Light				DIMENSION:[UNIT: MM]	
(MCA500A)-[MTF]				[FNE-L150] Fixed by Expansion Bolts	[FNA-L305] Fixed by Pre-buried Anchor
[BC2C180D] L305	[BC3C120D] L305	[BC4C90D] L305	[BC6C60D] L305		
[BC2C180D] L915	[BC3C120D] L915	[BC4C90D] L915	[BC6C60D] L915		
[BC2C180D] L915	[BC3C120D] L915	[BC4C90D] L915	[BC6C60D] L915		

