

DAWIN Double Ring Flush Mount

5 CCT Selectable

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- High-efficiency LED with selectable 5CCT (2700K/3000K/3500K/4000K/5000K)
- CRI >90
- Input: 120V
- Energy Efficiency: Saves 80% more energy than halogen lights
- Compatible with 2.75" and 3.5" junction boxes for flexible installation
- shadow-free illumination with no halo effect
- Simple, hassle-free setup

Construction

- Material: Iron and PS with a brushed nickel finish
- Beam Angle: 120°
- IP Rating: Suitable for damp locations
- Operating Temperature: Operates efficiently from -4°F to 113°F
- Triac dimmable with smooth brightness control from 100% to 10%

Certifications and Warranty

- Certifications: ETL Listed
- Warranty: Backed by a 5-year limited warranty

SKU Guide

Example: DAWIN12-16W-5CCT-BN


Family & Size	Wattage	CCT	Finish
DAWIN12 = 12in	16W	5CCT = 2700K 3000K 3500K 4000K 5000K	BN = Brushed Nickel
DAWIN14 = 14in	20W		
DAWIN16 = 16in	24W		

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	Voltage	Finish
12 inch DAWIN12-16W-5CCT-BN	16W	1100	5CCT 2700K/3000K/3500K/ 4000K/5000K	120V	Brushed Nickel
14 inch DAWIN14-20W-5CCT-BN	20W	1400	5CCT 2700K/3000K/3500K/ 4000K/5000K	120V	Brushed Nickel
16 inch DAWIN16-24W-5CCT-BN	24W	1800	5CCT 2700K/3000K/3500K/ 4000K/5000K	120V	Brushed Nickel

Contact for custom configuration & specifications

Dimensions

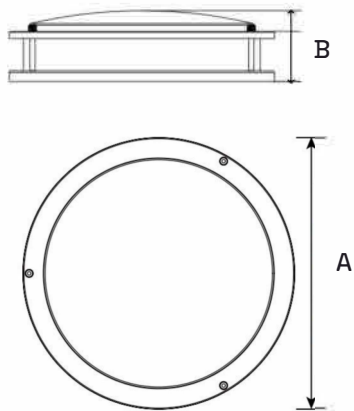



Model	A	B
DAWIN12-16W-5CCT-BN	11.81 in	3.54 in
DAWIN14-20W-5CCT-BN	13.78 in	3.54 in
DAWIN16-24W-5CCT-BN	15.75 in	3.74 in

Packaging Dimensions

SKU#	Inner Box	Qty	Master Box	Qty
DAWIN12-16W-5CCT-BN	12.20 x 4.72 x 12.80 in	1	19.69 x 12.68 x 13.58 in	4
DAWIN14-20W-5CCT-BN	14.02 x 4.92 x 14.76 in	1	20.47 x 14.49 x 15.55 in	4
DAWIN16-24W-5CCT-BN	14.02 x 4.92 x 14.76 in	1	20.47 x 14.49 x 15.55 in	4

Photometry

DAWIN 12-16W-5CCT-BN

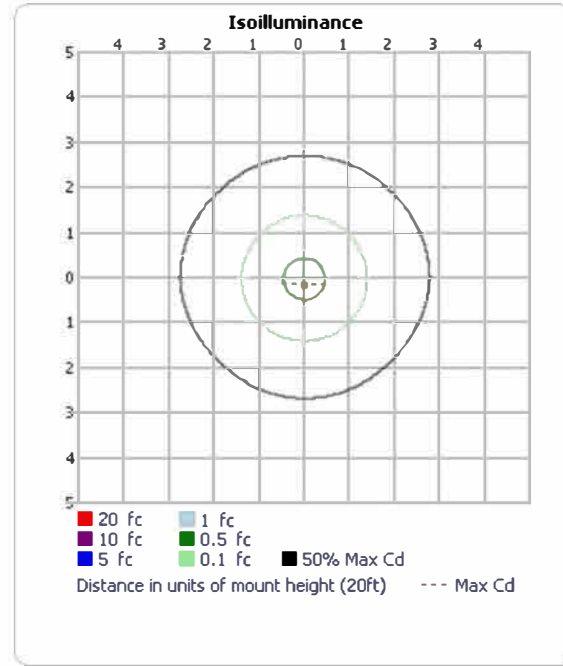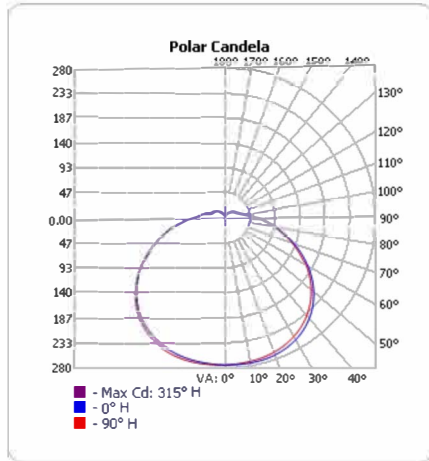

DAWIN 14-20W-5CCT-BN

